


CENTRYXX IP65

672170.002.2.04 | Stand-by luminaires for escape route illumination



Ceiling luminaires
4051859216919
L 198, B 198, H 38

Ceiling mounting
white

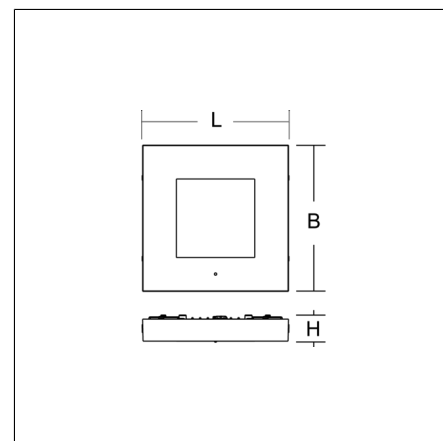

Flat, square surface-mounted luminaire. Base: die-cast aluminium, powder-coated Cover: polycarbonate. With narrow beam plastic lenses for area lighting. Electronic ballast included. Self-contained system with automatic self-test and feedback to the RZB monitoring system MULTIDIGIT. Luminaires with limited surface temperature in accordance with EN 60598-2-24 for use in environments in which a deposit of conductive dust on the luminaire can be expected. Ball impact proof in accordance with DIN 18032-3. Qualified for use in the food and drink industry.

Product specifications

Typ of emergency lighting	Self-contained system
Monitoring	MultiDigit
Battery	NiMh
Duration	3 h
Operating mode	maintained power mode
Length L	198 mm
Width B	198 mm
Height H	38 mm
Weight	1.04 kg
Light source	LED
Colour temperature	6500 K
Rated luminous flux, mains operation	470 lm
System power, mains operation	6,4 W
Rated luminous flux, emergency operation	390 lm
System efficiency	73 lm/W
Glare evaluation UGR (4H 8H)	17,1
Beam angle	35°
Colour rendering index (CRI)	70
Photobiological safety according to EN 62471	Risk group 2
Driver	Electronic ballast
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	30
Luminaires on B16A fuse	40
Luminaires on C10A fuse	30
Luminaires on C16A fuse	40
Inrush current / Inrush current duration	0.12 A / 5000 µs
CIE Flux Code / CEN Flux Code	82 95 99 100 100
Type of protection	IP 65
Protection class	I
Filament test	850 °C
Impact resistance	IK08
Ambient temperature for maintained power	5 °C ... + 30 °C
Ambient temperature for non-maintained power mode	5 °C ... + 30 °C
Safety marks	D-mark
Conformity mark	CE

Accessories



982274.002
Mounting set for through wiring surface installation



982257.002
Frame attachment



982341.002
Mounting kit for chains/cable suspensions



982425.002.04
Pendant tube set