




Spotlights
4068754013482
L 395, B 166, H 49

Pole mounting, Universal mounting system
anthracite metallic (DB703)

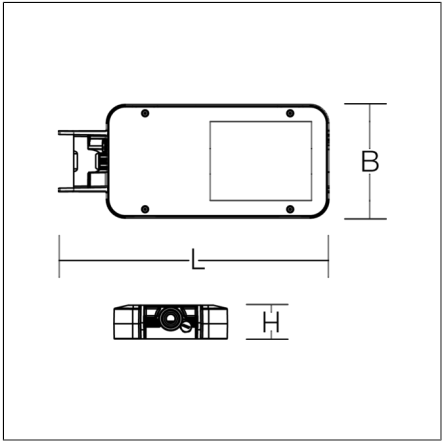

Compact spotlight for efficient outdoor emergency lighting. For escape route illumination. Housing made of corrosion-resistant die-cast aluminium, seawater resistant powder-coated. Tilt angle can be adjusted and locked in 5 degree steps featuring angular scale. With membrane valve as a standard to avoid condensed water. Cover clear single-pane toughened glass, edge printed. Cover screwed to housing. Lens system made of plastic (PMMA). Replaceable LED spot modules according to ZHAGA standards. Asymmetrical narrow beam light distribution for area lighting (e.g. parking lots, loading zones). Constant light output (CLO). With NFC programming interface. Pre-assembled connection cable, length 0.5 m. Suitable for connection to central battery systems. Modular design: Mounting set must be ordered separately.

Product specifications

Typ of emergency lighting	Central battery system
Monitoring	Power circuit
Operating mode	maintained power mode
Length L	395 mm
Width B	166 mm
Height H	49 mm
Weight	3.2 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux, mains operation	3950 lm
System power, mains operation	31 W
Rated luminous flux, emergency operation	990 lm
System power, emergency operation	8,6 W
System efficiency	127 lm/W
Glare evaluation UGR (4H 8H)	39,4
Beam angle	68°/69°/68°/0°
Rated life	100000 h
Colour rendering index (CRI)	70
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 0 Hz, 50 Hz, 60 Hz
Luminaires on B10A fuse	16
Luminaires on B16A fuse	26
Luminaires on C10A fuse	27
Luminaires on C16A fuse	44
Inrush current / Inrush current duration	18 A / 280 µs
CIE Flux Code / CEN Flux Code	29 67 97 100 100
Type of protection	IP 66
Protection class	I
Filament test	960 °C
Impact resistance	IK06
Ambient temperature for maintained power	-20 °C ... + 40 °C
Ambient temperature for non-maintained power mode	-20 °C ... + 40 °C
Conformity mark	CE

Accessories

	61199.009 Fuse box		982977.003
	982974.003		982638.003 Junction box H with strain relief.
	982588.000 Pole bracket for 2 luminaires, uncoated		982588.0031 Pole bracket for 2 luminaires, powder-coated
	982589.000 Pole bracket for 3 luminaires, uncoated		982589.0031 Pole bracket for 3 luminaires, powder-coated
	982590.000 Pole bracket for 4 luminaires, uncoated		982590.0031 Pole bracket for 4 luminaires, powder-coated
	982562.000 Reducing adapter Ø 60 mm		982058.000 Wall bracket, 500 mm, uncoated
	982058.0031 Wall bracket, 500 mm, anthracite metallic		982086.000 Wall bracket, 1000 mm, uncoated
	982086.0031 Wall bracket, 1000 mm, anthracite metallic		982049.000 Pole attachment (double): for spigot 60 mm, unpainted
	982049.0031 Pole attachment (double): for spigot 60 mm, anthracite metallic (DB703)		982050.000 Pole attachment (double): for spigot 76 mm, unpainted
	982050.0031 Pole attachment (double): for spigot 76 mm, anthracite metallic (DB703)		982524.0031 Adapter set for 4-fold configuration (4 x 90°)
	982092.000 Pole clip for pole diameter 95 - 114 mm		982093.000 Pole clip for pole diameter 115 - 135 mm

Modules

	983164.0031 Mounting bracket		983117.0031 Mounting bracket
--	---------------------------------	---	---------------------------------

LIGHTSTREAM mini

672849.0031 |



982978.0031

Pole attachment for 76 mm spigot.