


# MEGA GÜRTELLINSE

## 621103.004 | Wall luminaires



Wall luminaires  
4051859512356  
L 160, B 115, H 338

Wall (surface)  
silver, matt (approx. RAL 9006)

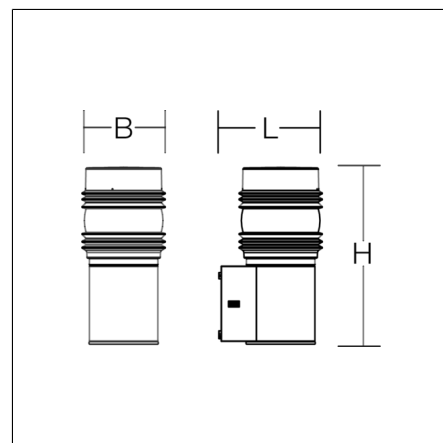

Attractive wall luminaire with innovative housing design and high-quality LED optics. Housing made of corrosion-resistant die-cast aluminium, seawater resistant powder-coated. With membrane valve as a standard to avoid condensed water. Mouth-blown luminaire glass, clear, drum lens shape. Fixing on the wall outside the sealed volume, drill hole deviations can be compensated. Screwless luminaire fixing via RZB Gravolock® System.

### Product specifications

|  |                                |
|--|--------------------------------|
| Length L                                     | 160 mm                         |
| Width B                                      | 115 mm                         |
| Height H                                     | 338 mm                         |
| Weight                                       | 3.04 kg                        |
| Light source                                 | LED                            |
| Colour temperature                           | 3000 K                         |
| Rated luminous flux                          | 500 lm                         |
| System power                                 | 10 W                           |
| System efficiency                            | 50 lm/W                        |
| Glare evaluation UGR (4H 8H)                 | 19,1                           |
| Beam angle                                   | down 180°<br>up 180°           |
| Rated life                                   | 60000 h (L80/B50)              |
| Colour rendering index (CRI)                 | 80                             |
| Colour tolerance                             | 3                              |
| Photobiological safety according to EN 62471 | Risk group 1                   |
| Driver                                       | Converter                      |
| Control                                      | on/off                         |
| Voltage                                      | 220 - 240 V / 0 Hz, 50 - 60 Hz |
| Luminaires on B10A fuse                      | 39                             |
| Luminaires on B16A fuse                      | 63                             |
| Luminaires on C10A fuse                      | 63                             |
| Luminaires on C16A fuse                      | 100                            |
| Inrush current / Inrush current duration     | 8 A / 5 µs                     |
| CIE Flux Code / CEN Flux Code                | 14 38 62 46 100                |
| Type of protection                           | IP 65                          |
| Protection class                             | I                              |
| Filament test                                | 960°C - 30 seconds             |
| Impact resistance                            | IK04                           |
| Ambient temperature                          | -20 °C ... + 45 °C             |
| Conformity mark                              | CE, EAC                        |

# MEGA GÜRTELLINSE

621103.004 | Wall luminaires



## Spareparts



982553.004  
Luminaire head, silver