


DEECOS S mini track-in

742248.002.730 | Surface mounted projector



Surface mounted projectors
4051859811039
D 87, H 135

Track on ceiling, Wall track
traffic white, matt (RAL 9016)

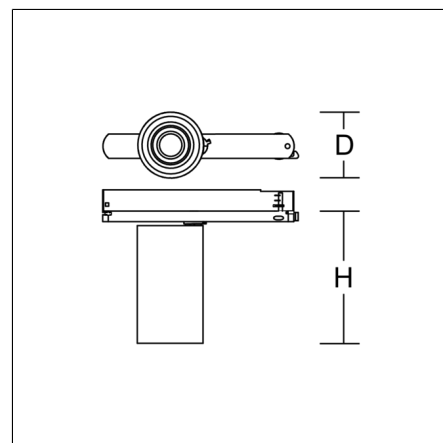

LED surface-mounted projector in modern design with no visible cooling ribs. Housing: die-cast aluminium, powder-coated. Rotation range: 356°. Swivel range: 90°. Black plastic ring and recessed LED to prevent glare from the side. Optical assembly with reflector made of MIRO-Silver with 98% total light reflection for outstanding efficiency - can be changed without tools. Best colour rendering index Ra>90. Superspot version with small spot LED. With multi adaptor for 3-circuit tracks 230 V. Suitable for Track on ceiling, Wall track. Track-in driver integrated into the adaptor. High quality converter without flickering and stroboscopic effect. With Casambi smart+free Bluetooth® control for wireless network and operation using Android / iOS devices, free app available for download. The following accessories can be mounted without use of tools: interchangeable lenses, decorative glasses, honeycomb louvre, clear and frosted diffusers, white interchangeable plastic ring.

Product specifications


| | |
|--|--------------------------|
| Diameter D | 87 mm |
| Height H | 135 mm |
| Weight | 0.62 kg |
| Light source | LED |
| Colour temperature | 3000 K |
| Rated luminous flux | 2200 lm |
| System power | 22 W |
| System efficiency | 100 lm/W |
| Glare evaluation UGR (4H 8H) | 13,5 |
| Beam angle | 13° |
| Rated life | 50000 h (L90/B10) |
| Colour rendering index (CRI) | 92 |
| Colour tolerance | 2 |
| Photobiological safety according to EN 62471 | Risk group 1 |
| Driver | Converter, dimmable |
| Control | smart+free (Bluetooth) |
| Voltage | 220 - 240 V / 50 - 60 Hz |
| Luminaires on B10A fuse | 17 |
| Luminaires on B16A fuse | 27 |
| Luminaires on C10A fuse | 28 |
| Luminaires on C16A fuse | 44 |
| Inrush current / Inrush current duration | 18 A / 2 µs |
| CIE Flux Code / CEN Flux Code | 100 100 100 100 100 |
| Type of protection | IP 20 |
| Protection class | II |
| Filament test | 650°C - 30 seconds |
| Impact resistance | IK06 |
| Ambient temperature | 25 °C |
| Conformity mark | CE, EAC |

DEECOS S mini track-in


742248.002.730 | Surface mounted projector



Accessories




982370.000
Diffuser, transparent




982371.003
Anti-glare honeycomb louvre




982421.002
White plastic ring for lens.



982369.043
Oval corridor lens



982370.010
Diffuser, satinated



982369.003
Spot lens



982368.003
Reflector spot



982419.002
White plastic ring for reflector.