


# FLAT SLIM step

672670.002 |



Ceiling and wall luminaires  
4051859982012  
D 350, H 75

Ceiling mounting, Wall (surface)  
traffic white, matt (RAL 9016)

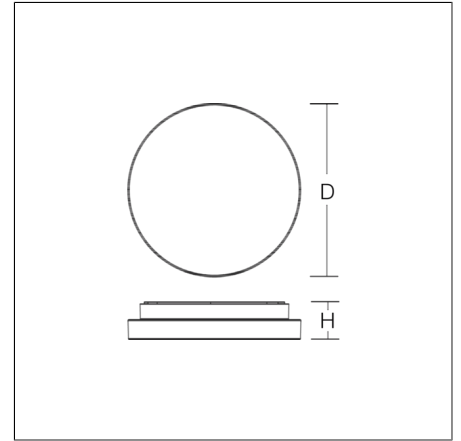

Decorative round surface-mounted luminaire for indoor and outdoor use. Base: pressure die-cast aluminium, powder-coated. Standard Gore™ Protective Vents diaphragm valve to avoid condensation. Uniform lighting achieved by the use of LED panel boards. Suitable for Ceiling mounting, Wall (surface). Very easy installation thanks to plug & play connection. The large connection compartment on the back for convenient connections is also ideal for through wiring. Electronic ballast included. Self-contained system with automatic self-test.

## Product specifications

|                                              |                            |
|----------------------------------------------|----------------------------|
| Typ of emergency lighting                    | Self-contained system      |
| Monitoring                                   | Autotest                   |
| Battery                                      | LiFePO4                    |
| Duration                                     | 8 h                        |
| Operating mode                               | maintained power mode      |
| Diameter D                                   | 350 mm                     |
| Height H                                     | 75 mm                      |
| Weight                                       | 2.94 kg                    |
| Light source                                 | LED                        |
| Colour temperature                           | 3000 K   4000 K            |
| Rated luminous flux, mains operation         | 3000 K: 1200 lm   2400 lm  |
|                                              | 4000 K: 1250 lm   2500 lm  |
| System power, mains operation                | 3000 K: 14 W   26 W        |
|                                              | 4000 K: 14 W   26 W        |
| Rated luminous flux, emergency operation     | 150 lm                     |
| System efficiency                            | 3000 K: 86 lm/W   92 lm/W  |
|                                              | 4000 K: 89 lm/W   96 lm/W  |
| Glare evaluation UGR (4H 8H)                 | 3000 K: 19,5   21,9        |
|                                              | 4000 K: 19,6   22          |
| Beam angle                                   | down 130°<br>up 180°       |
| Rated life                                   | 50000 h                    |
| Colour rendering index (CRI)                 | 80                         |
| Photobiological safety according to EN 62471 | Risk group 1               |
| Driver                                       | Converter                  |
| Control                                      | on/off                     |
| Voltage                                      | 220 - 240 V / 50 Hz, 60 Hz |
| Luminaires on B10A fuse                      | 31                         |
| Luminaires on B16A fuse                      | 50                         |
| Luminaires on C10A fuse                      | 52                         |
| Luminaires on C16A fuse                      | 85                         |
| Inrush current / Inrush current duration     | 5 A / 50 µs                |
| CIE Flux Code / CEN Flux Code                | 40 70 90 77 100            |
| Type of protection                           | IP 65                      |
| Protection class                             | I                          |
| Filament test                                | 960 °C                     |
| Impact resistance                            | IK03                       |
| Ambient temperature for maintained power     | 5 °C ... + 25 °C           |
| Safety marks                                 | D-mark                     |
| Conformity mark                              | CE, EAC                    |