


## PRODUCT DATASHEET

### HALOLINE 1000 W 230 V R7S

HALOLINE® Standard | Double ended halogen lamps with tube base

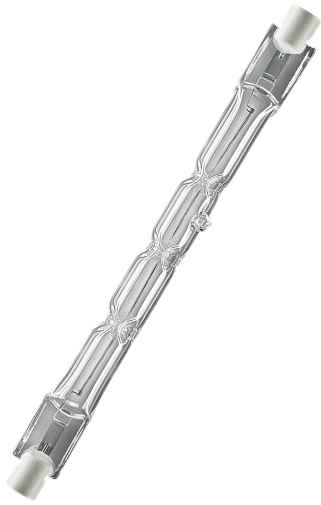

#### Areas of application

- Ideal for emphasizing and accentuating buildings
- General illumination
- Entrance lighting
- Pathway lighting
- Garden lighting
- Traffic areas
- Shops
- Restaurants, hotels and similar prestigious applications
- Outdoor applications only in suitable luminaires

#### Product benefits

- Brilliant accent light
- No transformer required
- Contains no mercury

#### Product features

- Average life: 2,000 h
- 100 % dimmable
- Color rendering index  $R_a$ : 100
- Color temperature: 3,000 K
- Burning position: p15




## TECHNICAL DATA

### Electrical data

Nominal wattage	1000.00 W
Construction wattage	1000.00 W
Nominal voltage	230 V

### Photometrical data

Luminous flux	21580 lm
Luminous efficacy	21 lm/W
Light color (designation)	Warm White
Color temperature	2900 K
Color rendering index Ra	100
Light color	1029
UV protection	No



349635\_HAL\_ohne\_UVS

### Light technical data

Starting time	0 s
---------------	-----

### Dimensions & Weight

Overall length	185.70 mm
Diameter	12 mm
Product weight	16.58 g

### Additional product data

Base (standard designation)	R7s
Mercury-free	Yes
Design / version	Tube

Product remark	Fuse protection with indicated values recommended acc. to IEC60357, EN60357 / For outdoor applications and operation in damp locations special approved fixtures are required
----------------	---

### Capabilities

Dimmable	Yes
Burning position	p15

### Certificates & Standards

Energy efficiency class	G
Energy consumption	1000.00 kWh/1000h

### Country-specific categorizations

ILCOS	HDG-1000-230-R7s-191,1
Order reference	64740 1000W 230




### Energy labelling regulation data acc EU 2019/2015

Lighting technology used	OTHER
Non-directional or directional	NDLS
Mains or non-mains	MLS
Light source cap-type (or other electric interface)	R7s
Connected light source (CLS)	No
Color-tuneable light source	No
Envelope	No
High luminance light source	No
Anti-glare shield	No
Correlated colour temperature type	SINGLE_VALUE
Claim of equivalent power	No
Length	191.10 mm
Height	12 mm
Width	12 mm
Chromaticity coordinate x	0.444
Chromaticity coordinate y	0.406
Beam angle correspondence	SPHERE_360
EPREL ID	714418,1635409
Model number	AC35333,AC54068

### Safety advice

- Do not touch the lamp if broken.
- Must not be used if outer bulb is defective.
- Lamp to be used only in a closed luminaire.
- Not designed as a replacement for conventional lighting in private household.

**DOWNLOAD DATA**

Documents and certificates		Document name
	Declarations of conformity	HALOLINE
	Declarations of conformity	CE Declaration R7s
Photometric and lighting design files		Document name
	Spectral power distribution	349635_HAL_ohne_UVS

**LOGISTICAL DATA**

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4050300004174	Folding box 1	238 mm x 26 mm x 30 mm	21.70 g	0.19 dm <sup>3</sup>
4050300206875	Shipping box 12	245 mm x 85 mm x 112 mm	320.00 g	2.33 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

**DISCLAIMER**

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.