


# ALU-LUX OVAL

582062.0031.1 | Ceiling and wall luminaires



Ceiling and wall luminaires  
4051859353393  
L 258, B 148, H 86

Ceiling mounting, Wall (surface)  
anthracite metallic (DB703)

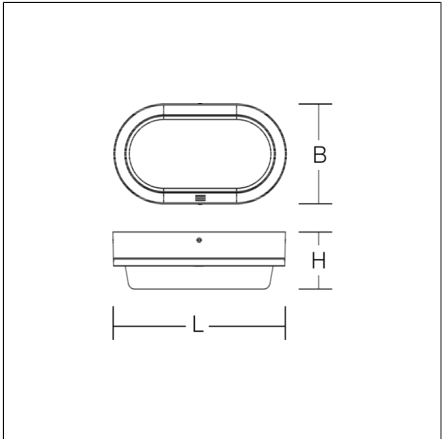

Decorative surface-mounted luminaire for outdoor use. Housing made of corrosion-resistant die-cast aluminium, seawater resistant powder-coated. With membrane valve to avoid condensation. Crystal glass: matt inside. Shadow-free, homogeneous and soft illumination. Base fixing slots outside of gasketed area, drill hole deviations can be compensated. Separate connection compartment for direct connection of rigid cables up to 3 x 2.5 mm². Replaceable LED module.

## Product specifications

Length L	258 mm
Width B	148 mm
Height H	86 mm
Weight	1.4 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux	740 lm
System power	12 W
System efficiency	62 lm/W
Glare evaluation UGR (4H 8H)	23,5
Beam angle	down 139°/125° up 180°/180°
Rated life	50000 h (L70/B50)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	Phase cut-off/cut-on
Voltage	230 V / 50 Hz
CIE Flux Code / CEN Flux Code	39 68 89 90 100
Type of protection	IP 65
Protection class	I
Filament test	960°C - 30 seconds
Impact resistance	IK07
Ambient temperature	-20 °C ... + 30 °C
Conformity mark	CE, EAC

## Spareparts



982586.009  
Replacement gasket

982587.002  
Replacement glass