




Ceiling luminaires  
4051859531630  
L 235, B 40, H 220

Ceiling mounting  
anodised aluminium

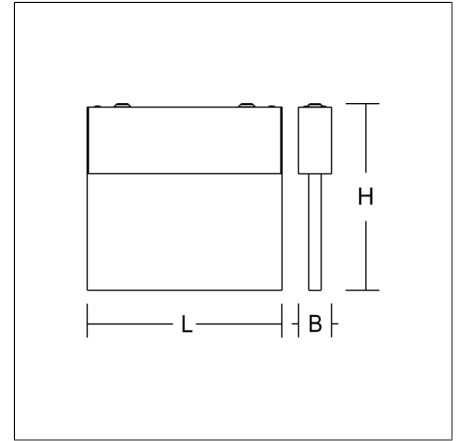

Luminaire for escape route identification. Housing: extruded aluminium profile, anodised or powder-coated. Display panel: highly transparent panel, plastic, with legend on one side/both sides. Driver integrated. Suitable for connection to central battery systems. Please indicate legend number when placing your order!

## Product specifications

Typ of emergency lighting	Central battery system
Monitoring	Power circuit
Battery	without
Operating mode	maintained power mode
Viewing Distance	19 m
Length L	235 mm
Width B	40 mm
Height H	220 mm
Weight	1.3 kg
Light source	LED
Colour temperature	4000 K
System power, mains operation	3,7 W
System power, emergency operation	3,7 W
Colour rendering index (CRI)	80
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 0 Hz, 50 - 60 Hz
Luminaires on B10A fuse	17
Luminaires on B16A fuse	27
Luminaires on C10A fuse	28
Luminaires on C16A fuse	45
Inrush current / Inrush current duration	27 A / 250 µs
Type of protection	IP 40
Protection class	I
Filament test	650°C - 30 seconds
Impact resistance	IK03
Ambient temperature for maintained power	0 °C ... + 25 °C
Ambient temperature for non-maintained power mode	5 °C ... + 40 °C
Conformity mark	CE

## Accessories



981639.060  
Suspension system



981639.020  
Suspension system

# HALYXX

671736.004.1 | Luminaires for escape route identification



981701.004  
Suspension system



982763.000  
Suspension cable set