

# ASTRA LED 7300LM 840 AR1 IP66 II CL. WIRE 0,7M WTYK/GN SP10KV (53W)

DETAILED CARD



## TECHNICAL PARAMETERS

|                                    |        |
|------------------------------------|--------|
| Index:                             | 663017 |
| Ingress protection:                | IP66   |
| Impact resistance:                 | IK08   |
| Rated power of the luminaire [W]*: | 53     |
| Luminous flux [lm]*:               | 7300   |
| Colour temperature [K]:            | 4000   |
| SDCM:                              | ≤ 5    |
| Colour rendering index:            | > 80   |
| Electrical protection class:       | II     |
| Energy efficiency class:           | C      |

## CHARACTERISTICS

Streetlight LED fitting with high luminous flux (max 153 lm/W) and an integrated energy-saving LED module. The self-cleaning body made of polypropylene (PP) with fibreglass (GF) and the grip made of aluminium. Thanks to the directional lens (made of PC), the light distribution meets the requirements of PN-EN 13201 lighting class. IP66 ingress protection class and IK08 impact-rating features make this fitting extremely tight and shock-resistant (vandal-resistant). Integrated, step-regulated grip allows to set the fitting by 5 degrees in the range of: -5° to +15° (peak to pole); -15° to +5° (side to boom). Options: any RAL color. RCR sensor controlled by remote control.

## APPLICATION

Luminaire applicable to: streets, local roads, bicycle paths, alleys, pavements, car parks and squares. Installation and mounting: lateral side entry, post-top mounting. Mounting grip integrated with the fitting.

# ASTRA LED 7300LM 840 AR1 IP66 II CL. WIRE 0,7M


## WTYK/GN SP10KV (53W)

DETAILED CARD

### TECHNICAL PARAMETERS TABLE

|                                   |               |                              |                                                                             |
|-----------------------------------|---------------|------------------------------|-----------------------------------------------------------------------------|
| Index:                            | 663017        | Ingress protection:          | IP66                                                                        |
| EAN:                              | 5905963663017 | Mounting version:            | Top, on pole / Side, on boom                                                |
| Rated power of the luminaire [W]: | 53            | Working temperature [°C]:    | from -20 to +35                                                             |
| Light source:                     | LED module    | Tilt angle adjustment [°]:   | -5 to +15 (peak); -15 to +5 (side)                                          |
| Colour temperature [K]:           | 4000          | Lateral surface (SCx) [m2]:  | 0.018                                                                       |
| Luminous flux [lm]:               | 7300          | Wire type:                   | H07RN-F                                                                     |
| Supply voltage [V]:               | 220 - 240     | Cable length [m]:            | 0.70                                                                        |
| Frequency [Hz]:                   | 50 - 60       | Protection type:             | 10kV                                                                        |
| Optics:                           | AR1           | Number on the palette [pcs]: | 62                                                                          |
| Luminous efficacy [lm/W]:         | 138           | Net weight [kg]:             | 1.900                                                                       |
| Energy efficiency class:          | C             | Category type:               | street lighting                                                             |
| Electrical protection class:      | II            | LED lifespan L80B20 [h]:     | 75000                                                                       |
| Colour rendering index:           | > 80          | Light distribution type:     | symetryczny/uliczny                                                         |
| SDCM:                             | ≤ 5           | ETIM class:                  | EC000062                                                                    |
| Power factor:                     | 0.97          | Photobiological safety:      | Risk Group 1 (no photobiological hazard under normal behavioral limitation) |
| Diffuser material:                | PC            | Surge protection [kV]:       | 10                                                                          |
| Diffuser type:                    | matrix led    | ULOR:                        | 0%                                                                          |
| Diffuser colour:                  | transparent   | Control:                     | ON/OFF                                                                      |
| Material of the body:             | PP+FG         | Optics material:             | PC                                                                          |
| Colour of the body:               | gray          | Warranty [years]:            | 5                                                                           |
| Dimensions (H/W/T/S) [mm]:        | 640/233/113   | CE certificate:              | <a href="#">102/2023</a>                                                    |
| Mounting dimensions [mm]:         | ø60           | ENEC Certificate:            | <a href="#">0324/ENEC/23</a>                                                |
| Impact resistance:                | IK08          | Manual:                      | <a href="#">Download PDF</a>                                                |
|                                   |               | Plik LDT:                    | <a href="#">Download</a>                                                    |

### LIGHT CURVES

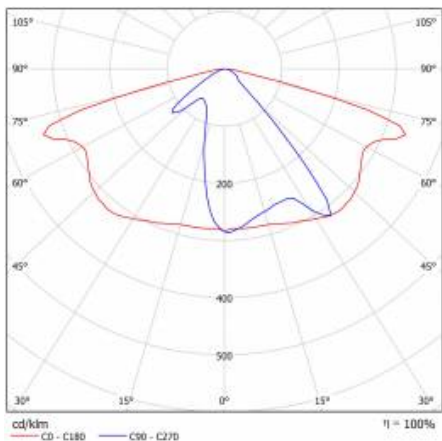

# ASTRA LED 7300LM 840 AR1 IP66 II CL. WIRE 0,7M WTYK/GN SP10KV (53W)

DETAILED CARD

## ACCESSORIES AVAILABLE

| index   | Name                     |
|---------|--------------------------|
| 314049  | wall holder (galvanized) |
| 314056  | wall holder (grey)       |
| UL00229 | mounting grip 78 mm      |



wall holder (galvanized) (314049)



wall holder (grey) (314056)



mounting grip 78 mm (UL00229)

Card creation date: 03 June 2025  
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 102/2023