


# ROUNDED maxi

581641.004.1 | Ceiling and wall luminaires



Ceiling and wall luminaires  
4051859227489  
D 400, H 127

Ceiling mounting, Wall (surface)  
silver, matt (approx. RAL 9006)

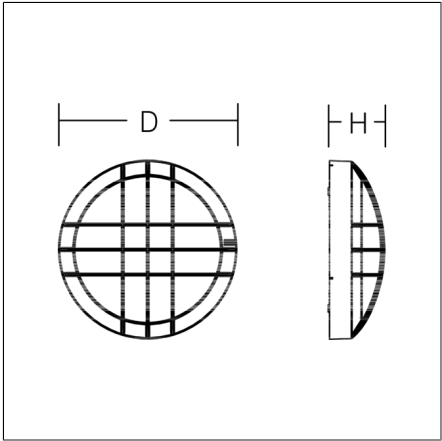


Round ceiling and wall luminaire with elegant appearance for outdoor use. Base, housing and protective guard made of corrosion resistant pressure die-cast aluminium, seawater resistant powder-coated. With membrane valve as a standard to avoid condensed water. Diffuser: crystal glass (satin finish) with diffuser fixing. Base fixing slots outside of gasketed area, drill hole deviations can be compensated. Screwless cover fixing via bayonet lock with safety catch. Includes 1 anti-theft device. Mains connection 2 x 3 x 1.5 mm².

### Product specifications

Diameter D	400 mm
Height H	127 mm
Weight	4.7 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux	1150 lm
System power	19 W
System efficiency	61 lm/W
Glare evaluation UGR (4H 8H)	21
Beam angle	114°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	83
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	77
Luminaires on B16A fuse	124
Luminaires on C10A fuse	77
Luminaires on C16A fuse	124
CIE Flux Code / CEN Flux Code	44 73 91 96 100
Type of protection	IP 65
Protection class	I
Filament test	960°C - 30 seconds
Impact resistance	IK07
Ambient temperature	-20 °C ... + 40 °C
Conformity mark	CE, EAC

### Accessories



982410.003  
Theft protection

# ROUNDED maxi

581641.004.1 | Ceiling and wall luminaires



## Spareparts



981212.002  
Replacement glass



982585.002  
Replacement gasket