


VESPO LED 1161MM RCR 7000LM PRM IP44 840 (50W)

DETAILED CARD

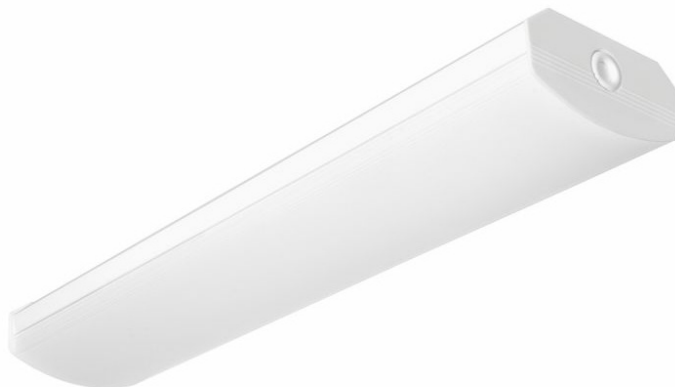

TECHNICAL PARAMETERS

Index:	642975
Ingress protection:	IP44
Impact resistance:	IK07
Nominal power [W]:	50
Luminous flux [lm]*:	7000
Colour temperature [K]:	4000
Colour rendering index:	>80
SDCM:	≤ 3
Energy efficiency class:	D
Material of the body:	powder coated steel

CHARACTERISTICS

Surface mounted luminaire made of powder coated white steel with prismatic or prismatic mat PC diffuser providing soft & uniform light. Equipped with LED modules with high luminous efficacy and SDCM <3. The luminaire in standard version has a 5 pole terminal block, that enables quick through-wiring, and strain relief.

Available versions:

- motion sensor (RCR),
- DALI,
- through-wiring (LS2),
- emergency module.

APPLICATION

Multi-purpose LED luminaire designed for indoor application. Especially recommended for public rooms and corridors (administration buildings, schools, universities and health care buildings).

DETAILED CARD

Nominal power [W]:	50	Colour of the body:	white
Light source:	LED module	Mounting dimensions [mm]:	1060
Colour temperature [K]:	4000	Impact resistance:	IK07
Rated power of the luminaire [W]:	54.90	Ingress protection:	IP44
Luminous flux [lm]:	7000	Mounting version:	surface
Supply voltage [V]:	220-240	Working temperature [°C]:	from -20 to +35
Diffuser type:	PRM	Accessories included:	Mounting pads (2 pcs.)
Frequency [Hz]:	50 - 60	Net weight [kg]:	2.300
Motion sensor:	yes	Index:	642975
Luminous efficacy [lm/W]:	127	EAN:	5905963642975
Operating mode:	M	Category type:	battens
Energy efficiency class:	D	Dusk sensor:	yes
Electrical protection class:	I	AC voltage range [V]:	198 – 264
Dimensions (H/W/T/S) [mm]:	1161/124/60	DC voltage range [V]:	176 – 280
Colour rendering index:	>80	LED lifespan L70B50 [h]:	116000
SDCM:	≤ 3	LED lifespan L80B20 [h]:	72000
Power factor:	0.97	LED lifespan L90B10 [h]:	31000
Max load (RCR) [W]:	400	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Diffuser material:	PC	Warranty [years]:	5
Material of the body:	powder coated steel	CE certificate:	332/2023
		PZH certificate:	B-BK-60212-0278/20
		Manual:	Download PDF
		Plik LDT:	Download

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 332/2023



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl