



NEOLUX[®]
GERMAN TECHNOLOGY

LED Exterior 6000 K 38.2 mm BAY15D

NEOLUX LED retrofits transform vehicle exteriors with modern, cold white light. NEOLUX LED retrofits replace most traditional white auxiliary lamps with ease. The results are more than aesthetic. In addition to that, the long-lasting, affordable NEOLUX LED lamps use less energy than conventional lamps. With a color temperature of 6,000 K, NEOLUX has the ideal solution for upgrading the exterior appearance of your vehicle.



Product family benefits

- Upgrade with the latest LED technology
- Modern look
- Better visibility
- Homogeneous illumination thanks to modern diffuser optics
- Longer replacement cycle

Product family features

- Contemporary, cold white color temperature with 6,000 K
- High brightness
- Even light distribution
- Ideal fit thanks to compact dimensions
- Long lifetime

Areas of application

- Exterior lighting



NP2260CW-02B

Product information

Product type (off-road vs. on-road)	Off-road
Application (Category and Product specific)	Mainly used for signal/ indicator applications

Electrical data

Power input	1.44 W
Test voltage	13.5 V
Power input tolerance	±20 %
Nominal wattage	1.20 W
Nominal voltage	12.0 V

Photometrical data

Color temperature	6000 K
Luminous flux	85/25 lm
Luminous flux tolerance	±20 %
Light color LED	Cool white

Dimensions & weight

Diameter	20.0 mm
Product weight	13.24 g
Length	38.2 mm

Lifespan

Lifespan Tc	2000 h
Lifespan B3	2000 h

Additional product data

Base (standard designation)	BAY15d
-----------------------------	--------

Capabilities

Technology	LED
------------	-----

Certificates & standards

ECE category	≅ P21/5W
--------------	----------

Logistical data


Order reference	NP2260CW-02B
-----------------	--------------

Environmental information

Date of Declaration	19-01-2022
Primary Article Identifier	4052899477452 4052899477476 4052899620056 4062172182829
Candidate List Substance 1	Lead
CAS No. of substance 1	7439-92-1
Safe Use Instruction	The identification of the Candidate List substance is sufficient to allow safe use of the article.
Declaration No. in SCIP database	ca94d550-f653-4f8d-b6d4-b43156e06327 4c9b68c4-92b7-4400-b92f-f153162cadbf fad3911c-04c8-4e3c-9e56-aa0eb22f1e24 adb5d57e-cae6-43c9-98f0-8560663d99a5

Packaging Information

Packaging description NEOLUX	EAN	Packaging type	Amount of article
NP2260CW-02B	4052899477476	Blister	2

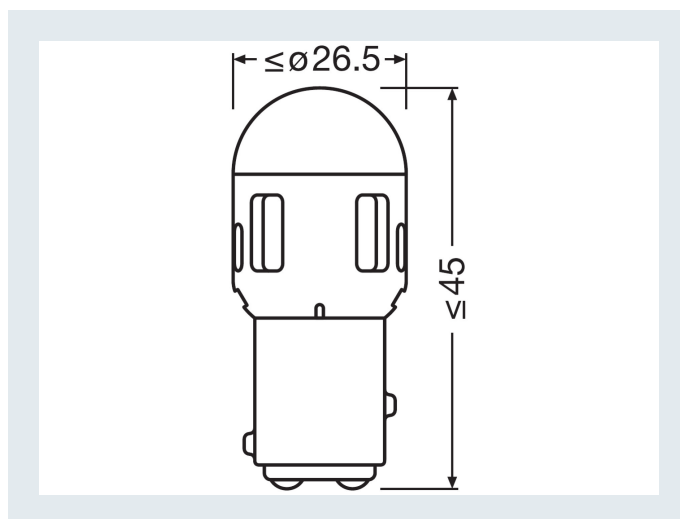

Legal advice

These products do not have ECE approval. This means they must not be used on public roads in any exterior application. Use on public roads leads to cancellation of operating license and loss of insurance coverage. Several countries do not allow sale and use of these products. Please contact your local distributor for information on the availability in your country.

NEOLUX[®]
GERMAN TECHNOLOGY

NEOLUX Automotive Lighting
OSRAM GmbH

Marcel-Breuer-Str 6
80807 Munich, Germany

Phone +49 89 6213-0
Fax +49 89 6213-2020

www.neolux-lighting.com