


# FLAT SLIM step

312635.004.76 | Ceiling and wall luminaires



Ceiling and wall luminaires  
4051859773542  
D 350, H 75

Ceiling mounting, Wall (surface)  
silver, matt (approx. RAL 9006)

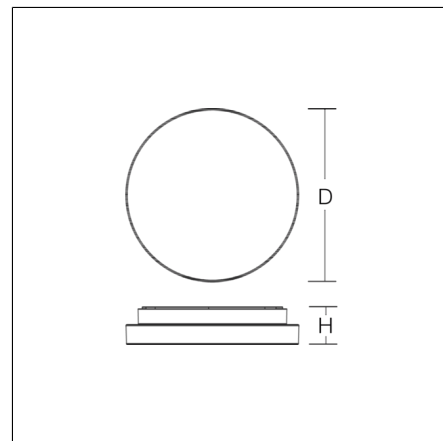

Decorative round LED surface-mounted luminaire for indoor and outdoor use. Base: pressure die-cast aluminium, powder-coated. Standard Gore™ Protective Vents diaphragm valve to avoid condensation. Mouth blown 3-layer opal glass (Triplex glass) with satin finish. Glass fastening: bayonet fixing. Uniform lighting achieved by the use of LED panel boards. Suitable for Ceiling mounting, Wall (surface). Very easy installation thanks to plug & play connection. The large connection compartment on the back for convenient connections is also ideal for through wiring. MultiLumen: 2 steps adjustable luminous flux. Factory setting is the highest luminous flux. MultiColour: Colour temperature individually adjustable either 3000 K or 4000 K via switching element. Factory setting is 3000 K. Dimmable DALI.

## Product specifications


|                                              |                             |
|----------------------------------------------|-----------------------------|
| Diameter D                                   | 350 mm                      |
| Height H                                     | 75 mm                       |
| Weight                                       | 2.66 kg                     |
| Light source                                 | LED                         |
| Colour temperature                           | 3000 K   4000 K             |
| Rated luminous flux                          | 3000 K: 1200 lm   2400 lm   |
|                                              | 4000 K: 1250 lm   2500 lm   |
| System power                                 | 3000 K: 11 W   22 W         |
|                                              | 4000 K: 11 W   22 W         |
| System efficiency                            | 3000 K: 109 lm/W   109 lm/W |
|                                              | 4000 K: 114 lm/W   114 lm/W |
| Glare evaluation UGR (4H 8H)                 | 3000 K: 19,7   22,1         |
|                                              | 4000 K: 19,8   22,2         |
| Beam angle                                   | down 128°<br>up 180°        |
| Rated life                                   | 50000 h (L90/B50)           |
| Colour rendering index (CRI)                 | 80                          |
| Colour tolerance                             | 3                           |
| Photobiological safety according to EN 62471 | Risk group 1                |
| Driver                                       | Converter, dimmable         |
| Control                                      | DALI                        |
| Voltage                                      | 220 - 240 V / 50 Hz, 60 Hz  |
| Luminaires on B10A fuse                      | 31                          |
| Luminaires on B16A fuse                      | 50                          |
| Luminaires on C10A fuse                      | 52                          |
| Luminaires on C16A fuse                      | 85                          |
| Inrush current / Inrush current duration     | 5 A / 50 µs                 |
| CIE Flux Code / CEN Flux Code                | 40 70 90 80 100             |
| Type of protection                           | IP 65                       |
| Protection class                             | I                           |
| Filament test                                | 960 °C                      |
| Impact resistance                            | IK03                        |
| Ambient temperature                          | -25 °C ... + 35 °C          |
| Safety marks                                 | D-mark                      |
| Conformity mark                              | CE, EAC                     |

# FLAT SLIM step

312635.004.76 | Ceiling and wall luminaires



## Spareparts



982971.002  
Replacement LED module



982899.002  
Replacement glass