


CENTRYXX W IP65

672305.002.1 | Stand-by luminaires for escape route illumination



Wall luminaires
4051859241133
L 79, B 198, H 198

Wall (surface)
white

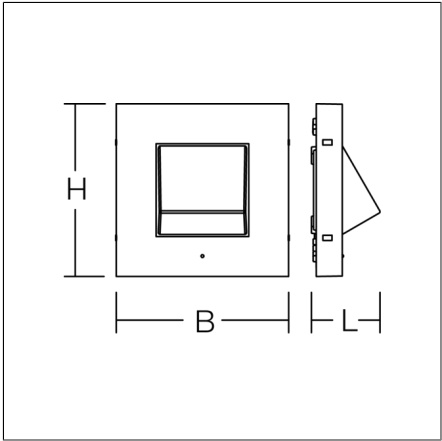

Wall luminaire for escape route illumination. Base: die-cast aluminium, powder-coated Cover: polycarbonate. With plastic lenses for area lighting. Vertical swivel. Driver integrated. Suitable for connection to central battery systems. Luminaires with limited surface temperature in accordance with EN 60598-2-24 for use in environments in which a deposit of conductive dust on the luminaire can be expected.

Product specifications

| | |
|---|----------------------------------|
| Type of emergency lighting | Central battery system |
| Monitoring | Power circuit |
| Battery | without |
| Operating mode | maintained power mode |
| Length L | 79 mm |
| Width B | 198 mm |
| Height H | 198 mm |
| Weight | 0.78 kg |
| Light source | LED |
| Colour temperature | 6500 K |
| Rated luminous flux, mains operation | 230 lm |
| System power, mains operation | 2,9 W |
| Rated luminous flux, emergency operation | 230 lm |
| System power, emergency operation | 2,6 W |
| System efficiency | 79 lm/W |
| Glare evaluation UGR (4H 8H) | 39,5 |
| Beam angle | 85°/53°/15°/53° |
| Colour rendering index (CRI) | 70 |
| Photobiological safety according to EN 62471 | Risk group 2 |
| Driver | Electronic ballast |
| Control | on/off |
| Voltage | 220 - 240 V / 0 Hz, 50 Hz, 60 Hz |
| Luminaires on B10A fuse | 18 |
| Luminaires on B16A fuse | 29 |
| Luminaires on C10A fuse | 36 |
| Luminaires on C16A fuse | 58 |
| Inrush current / Inrush current duration | 3.3 A / 400 µs |
| CIE Flux Code / CEN Flux Code | 40 70 92 98 100 |
| Type of protection | IP 65 |
| Protection class | I |
| Filament test | 850 °C |
| Impact resistance | IK08 |
| Ambient temperature for maintained power | -20 °C ... + 40 °C |
| Ambient temperature for non-maintained power mode | -20 °C ... + 40 °C |
| Safety marks | D-mark |
| Conformity mark | CE |

CENTRYXX W IP65

672305.002.1 | Stand-by luminaires for escape route illumination



Accessories



982274.002

Mounting set for through wiring surface installation