


# TX-MOVE

742158.003.1.76 | Surface mounted projector



Surface mounted projectors  
4051859756521  
L 569, B 57, H 77

Track on ceiling  
deep black, matt (RAL 9005)

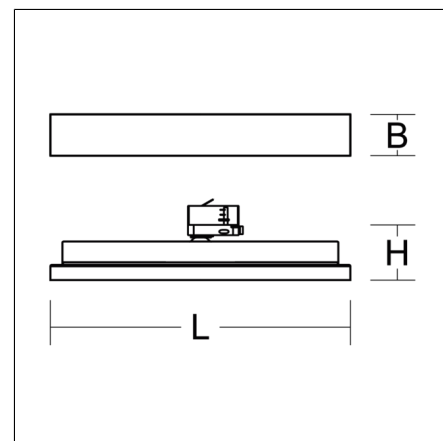

Multifunctional surface-mounted spotlight for area lighting. Very flat design. Housing: sheet steel, powder-coated. Rotation range: 356°. Swivel range: 90°. Consistent alignment possible with visible tilt scale. High-efficiency LED units with optimum light control thanks to clear plastic (PC) lens optics. Special microstructures reduce the yellow corona (caused by chromatic aberration) to an absolute minimum. Symmetrical light distribution. With adapter for RZB 3-circuit DALI tracks. Suitable for Track on ceiling. MultiLumen: Luminous flux adjustable in 3 steps. Factory setting is the highest luminous flux. Environmentally friendly and resource-saving due to replaceable and recyclable components.

## Product specifications

|                                              |                               |
|----------------------------------------------|-------------------------------|
| Length L                                     | 569 mm                        |
| Width B                                      | 57 mm                         |
| Height H                                     | 77 mm                         |
| Weight                                       | 1.38 kg                       |
| Light source                                 | LED                           |
| Colour temperature                           | 4000 K                        |
| Rated luminous flux                          | 2900 lm   4000 lm   5550lm    |
| System power                                 | 19 W   27 W   40W             |
| System efficiency                            | 139 lm/W   148 lm/W   153lm/W |
| Glare evaluation UGR (4H 8H)                 | 21,3   22,5   23,6            |
| Beam angle                                   | 85°                           |
| Rated life                                   | 50000 h (L80/B10)             |
| Colour rendering index (CRI)                 | 80                            |
| Colour tolerance                             | 3                             |
| Photobiological safety according to EN 62471 | Risk group 1                  |
| Driver                                       | Electronic ballast, dimmable  |
| Control                                      | DALI                          |
| Voltage                                      | 220 - 240 V / 50 Hz, 60 Hz    |
| Luminaires on B10A fuse                      | 15                            |
| Luminaires on B16A fuse                      | 24                            |
| Luminaires on C10A fuse                      | 25                            |
| Luminaires on C16A fuse                      | 40                            |
| Inrush current / Inrush current duration     | 26 A / 140 µs                 |
| CIE Flux Code / CEN Flux Code                | 77 96 99 100 100              |
| Type of protection                           | IP 20                         |
| Protection class                             | I                             |
| Filament test                                | 850 °C                        |
| Impact resistance                            | IK04                          |
| Ambient temperature                          | 5 °C ... + 25 °C              |
| Conformity mark                              | CE                            |