

# FACTOR LED 4M 116000LM 740 120D DALI IP66 SH (932W)

DETAILED CARD



## TECHNICAL PARAMETERS

|                                    |        |
|------------------------------------|--------|
| Index:                             | 993824 |
| Ingress protection:                | IP66   |
| Impact resistance:                 | IK09   |
| Rated power of the luminaire [W]*: | 932    |
| Luminous flux [lm]*:               | 116000 |
| Colour temperature [K]:            | 4000   |
| Colour rendering index:            | >70    |
| SDCM:                              | ≤ 5    |
| Electrical protection class:       | I      |
| Energy efficiency class:           | D      |

## CHARACTERISTICS

Factor Led is a latest-generation floodlight with a high power output and an impressive luminous flux. It is characterized not only by very high luminous efficiency but also by the highest IP 66 tightness and IK09 impact resistance. These parameters have been achieved thanks to the branded components used, robust housing made of cast aluminum, and the use of a passive cooling system for the lamp, which allows the excess heat generated to be dissipated during lamp operation. The Factor Led has the advantage of very fast and easy installation. The lightweight steel arm is attached to the supporting structure (wall, pole), and then the light modules are plugged in. On a single bracket, the installer can plug in a lamp containing from 1 to 4 such modules.

## APPLICATION

Very good sealing and impact resistance parameters, the ability to work in elevated temperatures - up to 45 ° C as standard, and an extensive range of spreads predisposes Factor Led lamps to work in harsh weather conditions. It will find application and perform well both inside industrial halls, warehouses, sports halls, logistics centers, and outdoors - on sports fields, airports, parking lots, and maneuvering areas. It can also illuminate the facades of buildings and elements of external architecture.

## DETAILS


# FACTOR LED 4M 116000LM 740 120D DALI IP66 SH (932W)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

|                                   |                |                                |                                 |
|-----------------------------------|----------------|--------------------------------|---------------------------------|
| Rated power of the luminaire [W]: | 932            | Material of the body:          | aluminium                       |
| Index:                            | 993824         | Colour of the body:            | RAL7016                         |
| EAN:                              | 5905963993824  | Dimensions (H/W/T/S) [mm]:     | 774/425/340                     |
| Luminous flux [lm]:               | 116000         | Impact resistance:             | IK09                            |
| Beam angle [°]:                   | 120            | Ingress protection:            | IP66                            |
| Diffuser material:                | tempered glass | Working temperature [°C]:      | from -40 to +45                 |
| Supply voltage [V]:               | 100-277        | Dimensions of single box [mm]: | 430/810/175                     |
| Frequency [Hz]:                   | 47-63          | Number on the palette [pcs]:   | 18                              |
| Luminous efficacy [lm/W]:         | 124            | Net weight [kg]:               | 23.400                          |
| Energy efficiency class:          | D              | LED lifespan L70B50 [h]:       | 156000                          |
| Electrical protection class:      | I              | LED lifespan L80B20 [h]:       | 98000                           |
| Colour temperature [K]:           | 4000           | LED lifespan L90B10 [h]:       | 47000                           |
| Colour rendering index:           | >70            | Lateral surface (SCx) [m2]:    | 15° 0.025; 45° 0.069; 75° 0.095 |
| DIMM DALI:                        | yes            | Warranty [years]:              | 5                               |
| SDCM:                             | ≤ 5            | CE certificate:                | <a href="#">262/2023</a>        |
| Power factor:                     | 0.97           | ENEC Certificate:              | <a href="#">0404/ENEC/25</a>    |
| Version:                          | 4 modules      | Manual:                        | <a href="#">Download PDF</a>    |
| Surge protection [kV]:            | 6              | Plik LDT:                      | <a href="#">Download</a>        |

## LIGHT CURVES

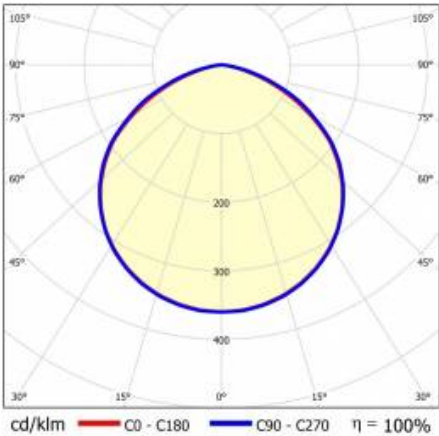


# FACTOR LED 4M 116000LM 740 120D DALI IP66 SH (932W)


DETAILED CARD

## ACCESSORIES AVAILABLE


| index  | Name                                  |
|--------|---------------------------------------|
| 684791 | Protective grid Factor LED 4M RAL7016 |
| 684784 | Protective grid Factor LED 3M RAL7016 |
| 684777 | Protective grid Factor LED 2M RAL7016 |
| 684760 | Protective grid Factor LED 1M RAL7016 |



Protective grid Factor LED 4M  
RAL7016 (684791)



Protective grid Factor LED 3M  
RAL7016 (684784)



Protective grid Factor LED 2M  
RAL7016 (684777)

Card creation date: 23 May 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 262/2023



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl