



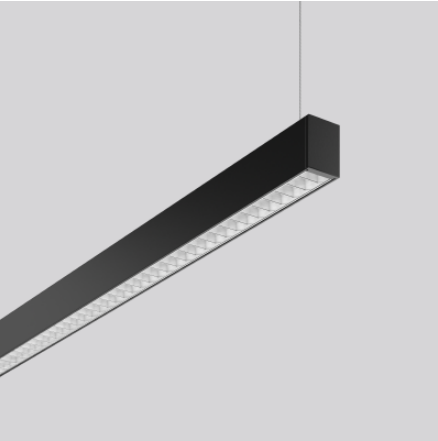

Pendant luminaires  
4051859274834  
L 1512, B 28, H 38

pendant  
deep black, matt (RAL 9005)

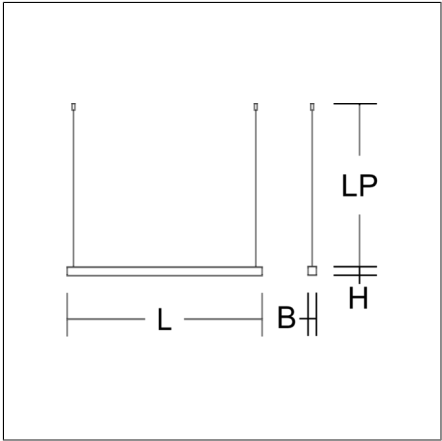

Pendant luminaire with slim design. Housing: extruded aluminium profile, powder-coated. End cap aluminium powder-coated. High polish aluminium micro grid. Perfect for office areas ( $UGR \leq 19$ ) and environments with computer screens in accordance with EN 12464-1. Direct 60%, indirect 40% light emission. Suitable for pendant. 2-point steel cable suspension, steplessly adjustable. Special lengths available on request. External driver with connecting cable.

Product specifications

|                                              |                                      |
|----------------------------------------------|--------------------------------------|
| Length L                                     | 1512 mm                              |
| Width B                                      | 28 mm                                |
| Height H                                     | 38 mm                                |
| Suspension length LP                         | 100-1500 mm                          |
| Weight                                       | 1.65 kg                              |
| Light source                                 | LED                                  |
| Colour temperature                           | #3000 K   #3000 K                    |
| Rated luminous flux                          | 2800 lm                              |
| System power                                 | 33 W                                 |
| System efficiency                            | 85 lm/W                              |
| Glare evaluation UGR (4H 8H)                 | 12,5                                 |
| Beam angle                                   | down 66°/45°<br>up 77°/102°          |
| Rated life                                   | 60000 h (L80/B10)                    |
| Colour rendering index (CRI)                 | 82                                   |
| Colour tolerance                             | 3                                    |
| Photobiological safety according to EN 62471 | Risk group 1                         |
| Driver                                       | Converter                            |
| Control                                      | on/off                               |
| Voltage                                      | 220 - 240 V / 50 Hz, 60 Hz           |
| Luminaires on B10A fuse                      | 13                                   |
| Luminaires on B16A fuse                      | 21                                   |
| Luminaires on C10A fuse                      | 22                                   |
| Luminaires on C16A fuse                      | 35                                   |
| Inrush current / Inrush current duration     | 21 A / 275 µs                        |
| CIE Flux Code / CEN Flux Code                | 90 99 100 54 100                     |
| Type of protection                           | IP 20                                |
| Protection class                             | II                                   |
| Filament test                                | 650 °C                               |
| Impact resistance                            | IK00                                 |
| Ambient temperature                          | -25 °C ... + 25 °C                   |
| Safety marks                                 | Do not cover the recessed luminaire! |
| Conformity mark                              | CE, EAC                              |