
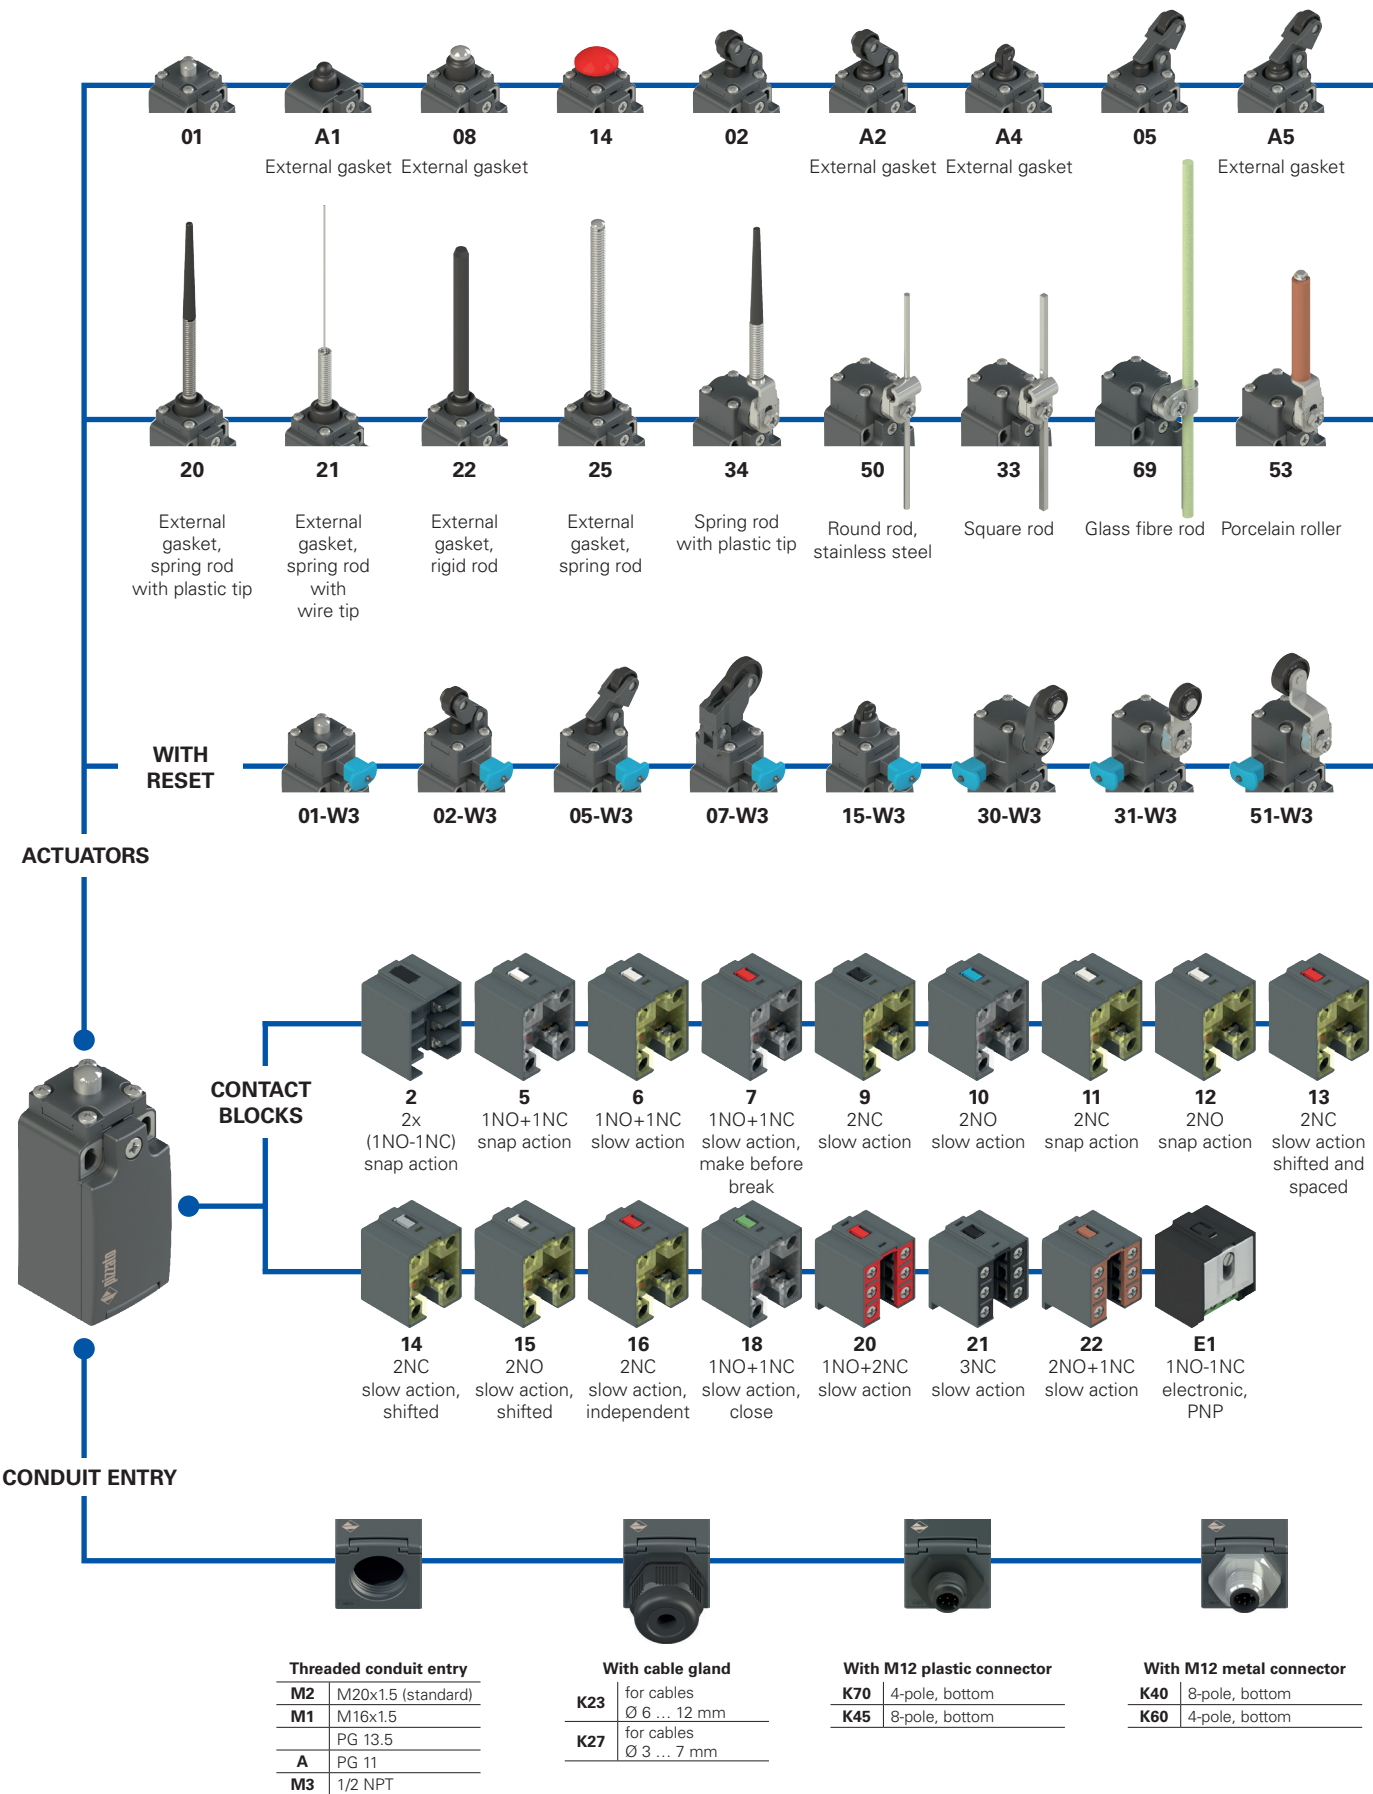


Selection diagram

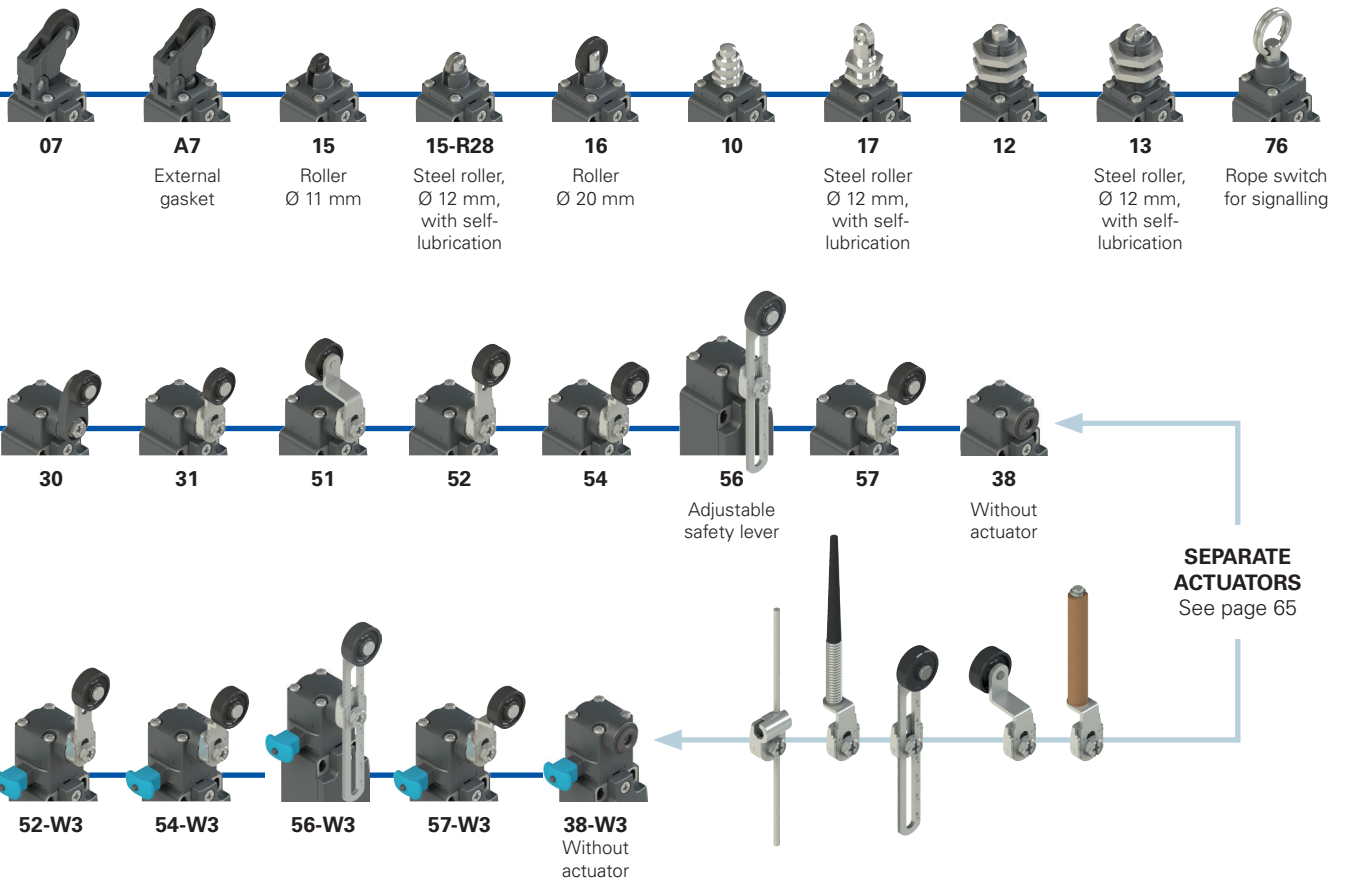

● Product options  
→ Sold separately as accessory


**Code structure**

**Attention!** The feasibility of a code number does not mean the effective availability of a product. Please contact our sales office.

article options options  
**FR 502-W3XGM2K70R23T6**

**Ambient temperature**

	-25°C ... +80°C (standard)
<b>T6</b>	-40°C ... +80°C

**Housing**

**FR** technopolymer, one conduit entry

**Contact block**

<b>5</b>	1NO+1NC, snap action
<b>6</b>	1NO+1NC, slow action
<b>7</b>	1NO+1NC, slow action, make before break
...	...

**Actuators**

<b>01</b>	short plunger
<b>02</b>	roller lever
<b>05</b>	angled lever with roller
...	...

**Reset**

	without reset (standard)
<b>W3</b>	simultaneous reset
<b>W4</b>	simultaneous reset, increased force

**External metallic parts**

	zinc-plated steel (standard)
<b>X</b>	stainless steel

**Pre-installed cable glands or connectors**

	no cable gland or connector (standard)
<b>K23</b>	cable gland for cables Ø 6 ... 12 mm
<b>K70</b>	M12 plastic connector, 4-pole

For the complete list of possible combinations please contact our technical department.

**Threaded conduit entry**

<b>M2</b>	M20x1.5 (standard)
<b>M1</b>	M16x1.5
	PG 13.5
<b>A</b>	PG 11
<b>M3</b>	1/2 NPT

**Contact type**

	silver contacts (standard)
<b>G</b>	silver contacts, 1 µm gold coating
<b>G1</b>	silver contacts, 2.5 µm gold coating (not for contact block 2, 20, 21, 22)

**Rollers**

	standard roller
<b>R28</b>	Steel, with self-lubrication, Ø 12 mm (for actuators A4, 15) 316L stainless steel, Ø 12 mm
<b>R44</b>	(for actuators A4, 13, 15, 17) Steel, with self-lubrication, Ø 14 mm
<b>R23</b>	(for actuators A2, 02, A5, 05, 30, 31, 51, 52, 54, 55, 56, 57) 316L stainless steel, Ø 14 mm
<b>R43</b>	(for actuators A2, 02, A5, 05, 30, 31, 51, 52, 54, 55, 56, 57) Steel, with self-lubrication, Ø 20 mm
<b>R24</b>	(for actuators 30, 31, 51, 52, 54, 55, 56, 57) 316L stainless steel, Ø 20 mm
<b>R41</b>	(for actuators 30, 31, 51, 52, 54, 55, 56, 57) Steel, with self-lubrication, Ø 16 mm
<b>R36</b>	(for actuators 30, 31, 51, 52, 54, 55, 56, 57) technopolymer, Ø 35 mm
<b>R25</b>	(for actuators 30, 31, 51, 52, 54, 55, 56, 57) rubber, Ø 40 mm
<b>R5</b>	(for actuators 30, 31, 51, 52, 54, 55, 56, 57) rubber, Ø 50 mm
<b>R26</b>	(for actuators 51, 52, 54, 55, 56, 57) rubber, protruding, Ø 50 mm
<b>R27</b>	(for actuators 55, 56)



### Main features

- Technopolymer housing, one conduit entry
- Hinged cover, fixed with single captive screw
- Metal plates on mounting holes of the housing
- Protection degree IP67 and up to IP69K for actuators without external gasket
- 17 contact blocks available
- 48 actuators available
- Versions with external parts in stainless steel
- Versions with M12 connector
- Versions with gold-plated silver contacts

### Quality marks:



IMQ approval:	EG610
UL approval:	E131787
CCC approval:	2021000305000101
EAC approval:	RU C-IT.YT03.B.00035/19

### Installation for safety applications:

Use only switches marked with the  $\ominus$  symbol beside the product code. Always connect the safety circuit to the **NC contacts** (normally closed contacts: 11-12, 21-22 or 31-32) as required by **EN ISO 14119, paragraph 5.4** for specific interlock applications and **EN ISO 13849-2 tables D3** (well-tried components) and **D.8** (fault exclusions) for safety applications in general. Actuate the switch **at least up to the positive opening travel** shown in the travel diagrams on page 232. Actuate the switch **at least with the positive opening force**, reported in brackets below each article, next to the actuating force value.

**⚠ If not expressly indicated in this chapter, for correct installation and utilization of all articles see the instructions given on pages 227 to 242.**

## Technical data

### Housing

Housing made of glass fibre reinforced technopolymer, self-extinguishing, shock-proof and with double insulation:  $\square$

One threaded conduit entry:	M20x1.5 (standard)
Protection degree:	IP67 acc. to EN 60529 (with cable gland of equal or higher protection degree)
Protection degree with actuators 01, 02, 05, 07, 10, 12, 13, 14, 15, 15-R28, 16, 17, 30, 31, 33, 34, 38, 50, 51, 52, 53, 54, 56, 57, 69, 76:	IP69K acc. to ISO 20653 (with cable gland of equal or higher protection degree)

### General data

Ambient temperature:	-25°C ... +80°C (standard) -40°C ... +80°C (T6 option)
Max. actuation frequency:	3600 operating cycles/hour
Mechanical endurance:	20 million operating cycles
Mounting position:	any
Safety parameter $B_{10D}$ :	40,000,000 for NC contacts
Mechanical interlock, not coded:	type 1 acc. to EN ISO 14119
Tightening torques for installation:	see page 231
Wire cross-sections and wire stripping lengths:	see page 249

### In compliance with standards:

IEC 60947-5-1, EN 60947-5-1, EN 60947-1, EN 50047, IEC 60204-1, EN 60204-1, EN ISO 14119, EN ISO 12100, IEC 60529, EN 60529, EN IEC 63000, UL 508, CSA C22.2 No. 14.

### Approvals:

IEC 60947-5-1, UL 508, CSA C22.2 No. 14, GB/T14048.5.

### Compliance with the requirements of:

Low Voltage Directive 2014/35/EU, EMC Directive 2014/30/EU, RoHS Directive 2011/65/EU.

### Positive contact opening in conformity with standards:

IEC 60947-5-1, EN 60947-5-1.

### Electrical data

### Utilization category

without connector	Thermal current ( $I_{th}$ ):	10 A	Alternating current: AC15 (50±60 Hz)			
	Rated insulation voltage (U):	500 Vac 600 Vdc 400 Vac 500 Vdc (contact blocks 2, 11, 12, 20, 21, 22)	Ue (V)	250	400	500
	Rated impulse withstand voltage ( $U_{imp}$ ):	6 kV 4 kV (contact blocks 20, 21, 22)	Ie (A)	6	4	1
	Conditional short circuit current: Protection against short circuits: Pollution degree:	1000 A acc. to EN 60947-5-1 type aM fuse 10 A 500 V 3	Direct current: DC13	Ue (V)	24	125

Ie (A)	3	0.55	0.3
--------	---	------	-----

with M12 connector, 4-pole	Thermal current ( $I_{th}$ ):	4 A	Alternating current: AC15 (50±60 Hz)			
	Rated insulation voltage (U):	250 Vac 300 Vdc	Ue (V)	24	120	250
	Protection against short circuits: Pollution degree:	type gG fuse 4 A 500 V 3	Ie (A)	4	4	4
			Direct current: DC13	Ue (V)	24	125

Ie (A)	3	0.55	0.3
--------	---	------	-----

with M12 connector, 8-pole	Thermal current ( $I_{th}$ ):	2 A	Alternating current: AC15 (50±60 Hz)			
	Rated insulation voltage (U):	30 Vac 36 Vdc	Ue (V)	24		
	Protection against short circuits: Pollution degree:	type gG fuse 2 A 500 V 3	Ie (A)	2		
			Direct current: DC13	Ue (V)	24	

Ie (A)	2		
--------	---	--	--



### Features approved by IMQ

Rated insulation voltage (Ui): 500 Vac  
 400 Vac (for contact blocks 2, 11, 12, 20, 21, 22, 28, 29, 30, 37, 33, 34)

Conventional free air thermal current (Ith): 10 A

Protection against short circuits: type aM fuse 10 A 500 V

Rated impulse withstand voltage (U<sub>imp</sub>): 6 kV  
 4 kV (for contact blocks 20, 21, 22, 28, 29, 30, 33, 34)

Protection degree of the housing: IP67

MV terminals (screw terminals)

Pollution degree: 3

Utilization category: AC15

Operating voltage (U<sub>e</sub>): 400 Vac (50 Hz)

Operating current (I<sub>e</sub>): 3 A

Forms of the contact element: Za, Za+Za, X+X, Zb, Y+Y, Y+Y+X, Y+Y+Y, Y+X+X, Y, X.

Positive opening of contacts on contact blocks 5, 6, 7, 8, 9, 11, 13, 14, 16, 17, 18, 19, 20, 21, 22, 28, 29, 30, 33, 34, 37, 38, 39, 66.

In compliance with standards: EN 60947-1, EN 60947-5-1, fundamental requirements of the Low Voltage Directive 2014/35/EU.

Please contact our technical department for the list of approved products.

### Features approved by UL

Electrical Ratings: Q300 pilot duty (69 VA, 125-250 V dc)  
 A600 pilot duty (720 VA, 120-600 V ac)

Environmental Ratings: Types 1, 4X


For all contact blocks except 2 and 3 use 60 or 75°C copper (Cu) conductors, rigid or flexible, wire size 12, 14 AWG. Tightening torque for terminal screws of 7.1 lb in (0.8 Nm).

For contact blocks 2 and 3 use 60 or 75°C copper (Cu) conductors, rigid or flexible, wire size 14 AWG. Tightening torque for terminal screws of 12 lb in (1.4 Nm).


The hub is to be connected to the conduit before the hub is connected to the enclosure.

Please contact our technical department for the list of approved products.

### Wiring diagram for M12 connectors

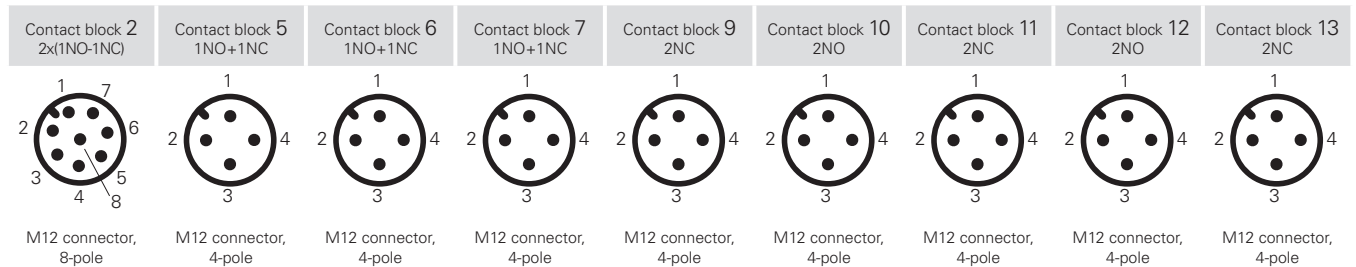


Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.
NO	3-4	NC	1-2	NC	1-2	NC	1-2	NO	1-2	NC	1-2	NO	1-2
NC	5-6	NO	3-4	NO	3-4	NO	3-4	NC	3-4	NC	3-4	NO	3-4
NC	7-8												
NO	1-2											NC (1°)	1-2
												NC (2°)	3-4

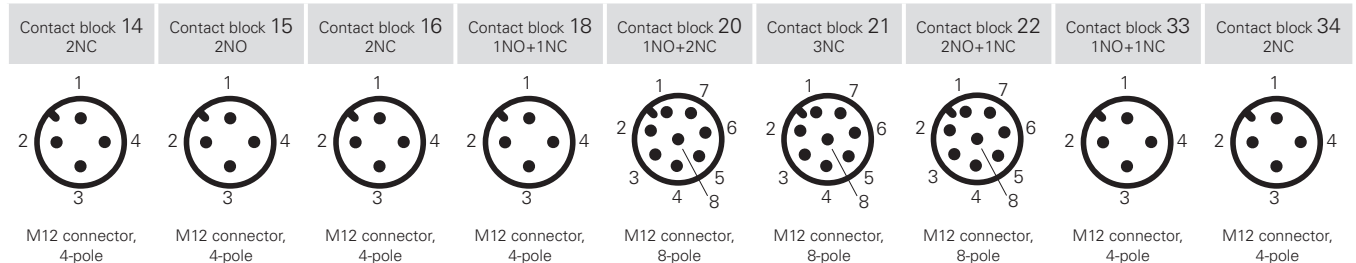

Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.	Contacts	Pin no.
NC (1°)	1-2	NO (1°)	1-2	NC, lever to the right	1-2	NC	1-2	NC	3-4	NC	3-4	NC	3-4
NC (2°)	3-4	NO (2°)	3-4	NC, lever to the left	3-4	NO	3-4	NC	5-6	NO	5-6	NO	3-4
								NO	7-8	NC	7-8	NO	7-8

Contact block E1  
PNP



M12 connector, 4-pole

Contacts	Pin no.
+	1
-	3
NC	2
NO	4

# FR series position switches

- R** = snap action  
**L** = slow action  
**LO** = slow action, make before break  
**LS** = slow action, shifted  
**LV** = slow action, shifted and spaced  
**LI** = slow action, independent  
**LA** = slow action, close  
**⊗** = electronic, PNP

Contact block

			External gasket		With steel roller with self-lubrication or 316L stainless steel on request		External gasket		With steel roller with self-lubrication or 316L stainless steel on request
2	<b>R</b>	FR 201-M2	2x(1NO-1NC)	/	FR 202-M2	2x(1NO-1NC)	FR 2A2-M2	2x(1NO-1NC)	
5	<b>R</b>	FR 501-M2	⊕ 1NO+1NC	FR 5A1-M2	⊕ 1NO+1NC	FR 502-M2	⊕ 1NO+1NC	FR 5A2-M2	⊕ 1NO+1NC
6	<b>L</b>	FR 601-M2	⊕ 1NO+1NC	FR 6A1-M2	⊕ 1NO+1NC	FR 602-M2	⊕ 1NO+1NC	FR 6A2-M2	⊕ 1NO+1NC
7	<b>LO</b>	FR 701-M2	⊕ 1NO+1NC	FR 7A1-M2	⊕ 1NO+1NC	FR 702-M2	⊕ 1NO+1NC	FR 7A2-M2	⊕ 1NO+1NC
9	<b>L</b>	FR 901-M2	⊕ 2NC	FR 9A1-M2	⊕ 2NC	FR 902-M2	⊕ 2NC	FR 9A2-M2	⊕ 2NC
10	<b>L</b>	FR 1001-M2	2NO	FR 10A1-M2	2NO	FR 1002-M2	2NO	FR 10A2-M2	2NO
11	<b>R</b>	FR 1101-M2	⊕ 2NC	FR 11A1-M2	⊕ 2NC	FR 1102-M2	⊕ 2NC	FR 11A2-M2	⊕ 2NC
12	<b>R</b>	FR 1201-M2	2NO	FR 12A1-M2	2NO	FR 1202-M2	2NO	FR 12A2-M2	2NO
13	<b>LV</b>	FR 1301-M2	⊕ 2NC	FR 13A1-M2	⊕ 2NC	FR 1302-M2	⊕ 2NC	FR 13A2-M2	⊕ 2NC
14	<b>LS</b>	FR 1401-M2	⊕ 2NC	FR 14A1-M2	⊕ 2NC	FR 1402-M2	⊕ 2NC	FR 14A2-M2	⊕ 2NC
15	<b>LS</b>	FR 1501-M2	2NO	FR 15A1-M2	2NO	FR 1502-M2	2NO	FR 15A2-M2	2NO
18	<b>LA</b>	FR 1801-M2	⊕ 1NO+1NC	FR 18A1-M2	⊕ 1NO+1NC	FR 1802-M2	⊕ 1NO+1NC	FR 18A2-M2	⊕ 1NO+1NC
20	<b>L</b>	FR 2001-M2	⊕ 1NO+2NC	FR 20A1-M2	⊕ 1NO+2NC	FR 2002-M2	⊕ 1NO+2NC	FR 20A2-M2	⊕ 1NO+2NC
21	<b>L</b>	FR 2101-M2	⊕ 3NC	FR 21A1-M2	⊕ 3NC	FR 2102-M2	⊕ 3NC	FR 21A2-M2	⊕ 3NC
22	<b>L</b>	FR 2201-M2	⊕ 2NO+1NC	FR 22A1-M2	⊕ 2NO+1NC	FR 2202-M2	⊕ 2NO+1NC	FR 22A2-M2	⊕ 2NO+1NC
E1	<b>⊗</b>	FR E101-M2	1NO-1NC	FR E1A1-M2	1NO-1NC	FR E102-M2	1NO-1NC	FR E1A2-M2	1NO-1NC
Max. speed	page 231 - type 4			page 231 - type 4			page 231 - type 3		
Actuating force	8 N (25 N ⊕)			6 N (25 N ⊕)			6 N (25 N ⊕)		
Travel diagrams	page 232 - group 1			page 232 - group 1			page 232 - group 2		

- R** = snap action  
**L** = slow action  
**LO** = slow action, make before break  
**LS** = slow action, shifted  
**LV** = slow action, shifted and spaced  
**LI** = slow action, independent  
**LA** = slow action, close  
**⊗** = electronic, PNP

Contact block

		External gasket		With steel roller with self-lubrication or 316L stainless steel on request		External gasket		With steel roller with self-lubrication or 316L stainless steel on request	
2	<b>R</b>	FR 2A4-M2	2x(1NO-1NC)	FR 205-M2	2x(1NO-1NC)	FR 2A5-M2	2x(1NO-1NC)	FR 207-M2	2x(1NO-1NC)
5	<b>R</b>	FR 5A4-M2	⊕ 1NO+1NC	FR 505-M2	⊕ 1NO+1NC	FR 5A5-M2	⊕ 1NO+1NC	FR 507-M2	⊕ 1NO+1NC
6	<b>L</b>	FR 6A4-M2	⊕ 1NO+1NC	FR 605-M2	⊕ 1NO+1NC	FR 6A5-M2	⊕ 1NO+1NC	FR 607-M2	⊕ 1NO+1NC
7	<b>LO</b>	FR 7A4-M2	⊕ 1NO+1NC	FR 705-M2	⊕ 1NO+1NC	FR 7A5-M2	⊕ 1NO+1NC	FR 707-M2	⊕ 1NO+1NC
9	<b>L</b>	FR 9A4-M2	⊕ 2NC	FR 905-M2	⊕ 2NC	FR 9A5-M2	⊕ 2NC	FR 907-M2	⊕ 2NC
10	<b>L</b>	FR 10A4-M2	2NO	FR 1005-M2	2NO	FR 10A5-M2	2NO	FR 1007-M2	2NO
11	<b>R</b>	FR 11A4-M2	⊕ 2NC	FR 1105-M2	⊕ 2NC	FR 11A5-M2	⊕ 2NC	FR 1107-M2	⊕ 2NC
12	<b>R</b>	FR 12A4-M2	2NO	FR 1205-M2	2NO	FR 12A5-M2	2NO	FR 1207-M2	2NO
13	<b>LV</b>	FR 13A4-M2	⊕ 2NC	FR 1305-M2	⊕ 2NC	FR 13A5-M2	⊕ 2NC	FR 1307-M2	⊕ 2NC
14	<b>LS</b>	FR 14A4-M2	⊕ 2NC	FR 1405-M2	⊕ 2NC	FR 14A5-M2	⊕ 2NC	FR 1407-M2	⊕ 2NC
15	<b>LS</b>	FR 15A4-M2	2NO	FR 1505-M2	2NO	FR 15A5-M2	2NO	FR 1507-M2	2NO
18	<b>LA</b>	FR 18A4-M2	⊕ 1NO+1NC	FR 1805-M2	⊕ 1NO+1NC	FR 18A5-M2	⊕ 1NO+1NC	FR 1807-M2	⊕ 1NO+1NC
20	<b>L</b>	FR 20A4-M2	⊕ 1NO+2NC	FR 2005-M2	⊕ 1NO+2NC	FR 20A5-M2	⊕ 1NO+2NC	FR 2007-M2	⊕ 1NO+2NC
21	<b>L</b>	FR 21A4-M2	⊕ 3NC	FR 2105-M2	⊕ 3NC	FR 21A5-M2	⊕ 3NC	FR 2107-M2	⊕ 3NC
22	<b>L</b>	FR 22A4-M2	⊕ 2NO+1NC	FR 2205-M2	⊕ 2NO+1NC	FR 22A5-M2	⊕ 2NO+1NC	FR 2207-M2	⊕ 2NO+1NC
E1	<b>⊗</b>	FR E1A4-M2	1NO-1NC	FR E105-M2	1NO-1NC	FR E1A5-M2	1NO-1NC	FR E107-M2	1NO-1NC
Max. speed	page 231 - type 5			page 231 - type 3			page 231 - type 3		
Actuating force	6 N (25 N ⊕)			6 N (25 N ⊕)			4.3 N (25 N ⊕)		
Travel diagrams	page 232 - group 1			page 232 - group 2			page 232 - group 3		

All values in the drawings are in mm

Accessories See page 207

→ The 2D and 3D files are available at [www.pizzato.com](http://www.pizzato.com)





Contact type	External gasket		External gasket		Secured only by means of threaded head in vertical position																																																																																																																																																																
<ul style="list-style-type: none"> <li><b>R</b> = snap action</li> <li><b>L</b> = slow action</li> <li><b>LO</b> = slow action, make before break</li> <li><b>LS</b> = slow action, shifted</li> <li><b>LV</b> = slow action, shifted and spaced</li> <li><b>LI</b> = slow action, independent</li> <li><b>LA</b> = slow action, close</li> <li> = electronic, PNP</li> </ul>																																																																																																																																																																					
<ul style="list-style-type: none"> <li><b>LS</b> = slow action, shifted</li> <li><b>LV</b> = slow action, shifted and spaced</li> <li><b>LI</b> = slow action, independent</li> <li><b>LA</b> = slow action, close</li> <li> = electronic, PNP</li> </ul>																																																																																																																																																																					
<table border="1"> <thead> <tr> <th>2</th> <th><b>R</b></th> <th>FR 2A7-M2</th> <th>2x(1NO-1NC)</th> <th>FR 208-M2</th> <th>2x(1NO-1NC)</th> <th>FR 210-M2</th> <th>2x(1NO-1NC)</th> <th>FR 212-M2</th> <th>2x(1NO-1NC)</th> </tr> </thead> <tbody> <tr> <td>5</td> <td><b>R</b></td> <td>FR 5A7-M2</td> <td>⊕ 1NO+1NC</td> <td>FR 508-M2</td> <td>⊕ 1NO+1NC</td> <td>FR 510-M2</td> <td>⊕ 1NO+1NC</td> <td>FR 512-M2</td> <td>⊕ 1NO+1NC</td> </tr> <tr> <td>6</td> <td><b>L</b></td> <td>FR 6A7-M2</td> <td>⊕ 1NO+1NC</td> <td>FR 608-M2</td> <td>⊕ 1NO+1NC</td> <td>FR 610-M2</td> <td>⊕ 1NO+1NC</td> <td>FR 612-M2</td> <td>⊕ 1NO+1NC</td> </tr> <tr> <td>7</td> <td><b>LO</b></td> <td>FR 7A7-M2</td> <td>⊕ 1NO+1NC</td> <td>FR 708-M2</td> <td>⊕ 1NO+1NC</td> <td>FR 710-M2</td> <td>⊕ 1NO+1NC</td> <td>FR 712-M2</td> <td>⊕ 1NO+1NC</td> </tr> <tr> <td>9</td> <td><b>L</b></td> <td>FR 9A7-M2</td> <td>⊕ 2NC</td> <td>FR 908-M2</td> <td>⊕ 2NC</td> <td>FR 910-M2</td> <td>⊕ 2NC</td> <td>FR 912-M2</td> <td>⊕ 2NC</td> </tr> <tr> <td>10</td> <td><b>L</b></td> <td>FR 10A7-M2</td> <td>2NO</td> <td>FR 1008-M2</td> <td>2NO</td> <td>FR 1010-M2</td> <td>2NO</td> <td>FR 1012-M2</td> <td>2NO</td> </tr> <tr> <td>11</td> <td><b>R</b></td> <td>FR 11A7-M2</td> <td>⊕ 2NC</td> <td>FR 1108-M2</td> <td>⊕ 2NC</td> <td>FR 1110-M2</td> <td>⊕ 2NC</td> <td>FR 1112-M2</td> <td>⊕ 2NC</td> </tr> <tr> <td>12</td> <td><b>R</b></td> <td>FR 12A7-M2</td> <td>2NO</td> <td>FR 1208-M2</td> <td>2NO</td> <td>FR 1210-M2</td> <td>2NO</td> <td>FR 1212-M2</td> <td>2NO</td> </tr> <tr> <td>13</td> <td><b>LV</b></td> <td>FR 13A7-M2</td> <td>⊕ 2NC</td> <td>FR 1308-M2</td> <td>⊕ 2NC</td> <td>FR 1310-M2</td> <td>⊕ 2NC</td> <td>FR 1312-M2</td> <td>⊕ 2NC</td> </tr> <tr> <td>14</td> <td><b>LS</b></td> <td>FR 14A7-M2</td> <td>⊕ 2NC</td> <td>FR 1408-M2</td> <td>⊕ 2NC</td> <td>FR 1410-M2</td> <td>⊕ 2NC</td> <td>FR 1412-M2</td> <td>⊕ 2NC</td> </tr> <tr> <td>15</td> <td><b>LS</b></td> <td>FR 15A7-M2</td> <td>2NO</td> <td>FR 1508-M2</td> <td>2NO</td> <td>FR 1510-M2</td> <td>2NO</td> <td>FR 1512-M2</td> <td>2NO</td> </tr> <tr> <td>18</td> <td><b>LA</b></td> <td>FR 18A7-M2</td> <td>⊕ 1NO+1NC</td> <td>FR 1808-M2</td> <td>⊕ 1NO+1NC</td> <td>FR 1810-M2</td> <td>⊕ 1NO+1NC</td> <td>FR 1812-M2</td> <td>⊕ 1NO+1NC</td> </tr> <tr> <td>20</td> <td><b>L</b></td> <td>FR 20A7-M2</td> <td>⊕ 1NO+2NC</td> <td>FR 2008-M2</td> <td>⊕ 1NO+2NC</td> <td>FR 2010-M2</td> <td>⊕ 1NO+2NC</td> <td>FR 2012-M2</td> <td>⊕ 1NO+2NC</td> </tr> <tr> <td>21</td> <td><b>L</b></td> <td>FR 21A7-M2</td> <td>⊕ 3NC</td> <td>FR 2108-M2</td> <td>⊕ 3NC</td> <td>FR 2110-M2</td> <td>⊕ 3NC</td> <td>FR 2112-M2</td> <td>⊕ 3NC</td> </tr> <tr> <td>22</td> <td><b>L</b></td> <td>FR 22A7-M2</td> <td>⊕ 2NO+1NC</td> <td>FR 2208-M2</td> <td>⊕ 2NO+1NC</td> <td>FR 2210-M2</td> <td>⊕ 2NO+1NC</td> <td>FR 2212-M2</td> <td>⊕ 2NO+1NC</td> </tr> <tr> <td>E1</td> <td></td> <td>FR E1A7-M2</td> <td>1NO-1NC</td> <td>FR E108-M2</td> <td>1NO-1NC</td> <td>FR E110-M2</td> <td>1NO-1NC</td> <td>FR E112-M2</td> <td>1NO-1NC</td> </tr> </tbody> </table>	2	<b>R</b>	FR 2A7-M2	2x(1NO-1NC)	FR 208-M2	2x(1NO-1NC)	FR 210-M2	2x(1NO-1NC)	FR 212-M2	2x(1NO-1NC)	5	<b>R</b>	FR 5A7-M2	⊕ 1NO+1NC	FR 508-M2	⊕ 1NO+1NC	FR 510-M2	⊕ 1NO+1NC	FR 512-M2	⊕ 1NO+1NC	6	<b>L</b>	FR 6A7-M2	⊕ 1NO+1NC	FR 608-M2	⊕ 1NO+1NC	FR 610-M2	⊕ 1NO+1NC	FR 612-M2	⊕ 1NO+1NC	7	<b>LO</b>	FR 7A7-M2	⊕ 1NO+1NC	FR 708-M2	⊕ 1NO+1NC	FR 710-M2	⊕ 1NO+1NC	FR 712-M2	⊕ 1NO+1NC	9	<b>L</b>	FR 9A7-M2	⊕ 2NC	FR 908-M2	⊕ 2NC	FR 910-M2	⊕ 2NC	FR 912-M2	⊕ 2NC	10	<b>L</b>	FR 10A7-M2	2NO	FR 1008-M2	2NO	FR 1010-M2	2NO	FR 1012-M2	2NO	11	<b>R</b>	FR 11A7-M2	⊕ 2NC	FR 1108-M2	⊕ 2NC	FR 1110-M2	⊕ 2NC	FR 1112-M2	⊕ 2NC	12	<b>R</b>	FR 12A7-M2	2NO	FR 1208-M2	2NO	FR 1210-M2	2NO	FR 1212-M2	2NO	13	<b>LV</b>	FR 13A7-M2	⊕ 2NC	FR 1308-M2	⊕ 2NC	FR 1310-M2	⊕ 2NC	FR 1312-M2	⊕ 2NC	14	<b>LS</b>	FR 14A7-M2	⊕ 2NC	FR 1408-M2	⊕ 2NC	FR 1410-M2	⊕ 2NC	FR 1412-M2	⊕ 2NC	15	<b>LS</b>	FR 15A7-M2	2NO	FR 1508-M2	2NO	FR 1510-M2	2NO	FR 1512-M2	2NO	18	<b>LA</b>	FR 18A7-M2	⊕ 1NO+1NC	FR 1808-M2	⊕ 1NO+1NC	FR 1810-M2	⊕ 1NO+1NC	FR 1812-M2	⊕ 1NO+1NC	20	<b>L</b>	FR 20A7-M2	⊕ 1NO+2NC	FR 2008-M2	⊕ 1NO+2NC	FR 2010-M2	⊕ 1NO+2NC	FR 2012-M2	⊕ 1NO+2NC	21	<b>L</b>	FR 21A7-M2	⊕ 3NC	FR 2108-M2	⊕ 3NC	FR 2110-M2	⊕ 3NC	FR 2112-M2	⊕ 3NC	22	<b>L</b>	FR 22A7-M2	⊕ 2NO+1NC	FR 2208-M2	⊕ 2NO+1NC	FR 2210-M2	⊕ 2NO+1NC	FR 2212-M2	⊕ 2NO+1NC	E1		FR E1A7-M2	1NO-1NC	FR E108-M2	1NO-1NC	FR E110-M2	1NO-1NC	FR E112-M2	1NO-1NC	<p>Max. speed</p> <p>Actuating force</p> <p>Travel diagrams</p>	<p>page 231 - type 3</p> <p>3 N (25 N ⊕)</p> <p>page 232 - group 3</p>	<p>page 231 - type 4</p> <p>8 N (25 N ⊕)</p> <p>page 232 - group 1</p>	<p>page 231 - type 4</p> <p>8 N (25 N ⊕)</p> <p>page 232 - group 1</p>	<p>page 231 - type 4</p> <p>8 N (25 N ⊕)</p> <p>page 232 - group 1</p>
2	<b>R</b>	FR 2A7-M2	2x(1NO-1NC)	FR 208-M2	2x(1NO-1NC)	FR 210-M2	2x(1NO-1NC)	FR 212-M2	2x(1NO-1NC)																																																																																																																																																												
5	<b>R</b>	FR 5A7-M2	⊕ 1NO+1NC	FR 508-M2	⊕ 1NO+1NC	FR 510-M2	⊕ 1NO+1NC	FR 512-M2	⊕ 1NO+1NC																																																																																																																																																												
6	<b>L</b>	FR 6A7-M2	⊕ 1NO+1NC	FR 608-M2	⊕ 1NO+1NC	FR 610-M2	⊕ 1NO+1NC	FR 612-M2	⊕ 1NO+1NC																																																																																																																																																												
7	<b>LO</b>	FR 7A7-M2	⊕ 1NO+1NC	FR 708-M2	⊕ 1NO+1NC	FR 710-M2	⊕ 1NO+1NC	FR 712-M2	⊕ 1NO+1NC																																																																																																																																																												
9	<b>L</b>	FR 9A7-M2	⊕ 2NC	FR 908-M2	⊕ 2NC	FR 910-M2	⊕ 2NC	FR 912-M2	⊕ 2NC																																																																																																																																																												
10	<b>L</b>	FR 10A7-M2	2NO	FR 1008-M2	2NO	FR 1010-M2	2NO	FR 1012-M2	2NO																																																																																																																																																												
11	<b>R</b>	FR 11A7-M2	⊕ 2NC	FR 1108-M2	⊕ 2NC	FR 1110-M2	⊕ 2NC	FR 1112-M2	⊕ 2NC																																																																																																																																																												
12	<b>R</b>	FR 12A7-M2	2NO	FR 1208-M2	2NO	FR 1210-M2	2NO	FR 1212-M2	2NO																																																																																																																																																												
13	<b>LV</b>	FR 13A7-M2	⊕ 2NC	FR 1308-M2	⊕ 2NC	FR 1310-M2	⊕ 2NC	FR 1312-M2	⊕ 2NC																																																																																																																																																												
14	<b>LS</b>	FR 14A7-M2	⊕ 2NC	FR 1408-M2	⊕ 2NC	FR 1410-M2	⊕ 2NC	FR 1412-M2	⊕ 2NC																																																																																																																																																												
15	<b>LS</b>	FR 15A7-M2	2NO	FR 1508-M2	2NO	FR 1510-M2	2NO	FR 1512-M2	2NO																																																																																																																																																												
18	<b>LA</b>	FR 18A7-M2	⊕ 1NO+1NC	FR 1808-M2	⊕ 1NO+1NC	FR 1810-M2	⊕ 1NO+1NC	FR 1812-M2	⊕ 1NO+1NC																																																																																																																																																												
20	<b>L</b>	FR 20A7-M2	⊕ 1NO+2NC	FR 2008-M2	⊕ 1NO+2NC	FR 2010-M2	⊕ 1NO+2NC	FR 2012-M2	⊕ 1NO+2NC																																																																																																																																																												
21	<b>L</b>	FR 21A7-M2	⊕ 3NC	FR 2108-M2	⊕ 3NC	FR 2110-M2	⊕ 3NC	FR 2112-M2	⊕ 3NC																																																																																																																																																												
22	<b>L</b>	FR 22A7-M2	⊕ 2NO+1NC	FR 2208-M2	⊕ 2NO+1NC	FR 2210-M2	⊕ 2NO+1NC	FR 2212-M2	⊕ 2NO+1NC																																																																																																																																																												
E1		FR E1A7-M2	1NO-1NC	FR E108-M2	1NO-1NC	FR E110-M2	1NO-1NC	FR E112-M2	1NO-1NC																																																																																																																																																												

Contact type	Roller, Ø 11 mm, technopolymer		Steel roller, Ø 12 mm, with self-lubrication																																																																																																																																																																		
<ul style="list-style-type: none"> <li><b>R</b> = snap action</li> <li><b>L</b> = slow action</li> <li><b>LO</b> = slow action, make before break</li> <li><b>LS</b> = slow action, shifted</li> <li><b>LV</b> = slow action, shifted and spaced</li> <li><b>LI</b> = slow action, independent</li> <li><b>LA</b> = slow action, close</li> <li> = electronic, PNP</li> </ul>																																																																																																																																																																					
<ul style="list-style-type: none"> <li><b>LS</b> = slow action, shifted</li> <li><b>LV</b> = slow action, shifted and spaced</li> <li><b>LI</b> = slow action, independent</li> <li><b>LA</b> = slow action, close</li> <li> = electronic, PNP</li> </ul>																																																																																																																																																																					
<table border="1"> <thead> <tr> <th>2</th> <th><b>R</b></th> <th>FR 213-M2</th> <th>2x(1NO-1NC)</th> <th>FR 214-M2</th> <th>2x(1NO-1NC)</th> <th>FR 215-M2</th> <th>2x(1NO-1NC)</th> <th>FR 215-M2R28</th> <th>2x(1NO-1NC)</th> </tr> </thead> <tbody> <tr> <td>5</td> <td><b>R</b></td> <td>FR 513-M2</td> <td>⊕ 1NO+1NC</td> <td>FR 514-M2</td> <td>⊕ 1NO+1NC</td> <td>FR 515-M2</td> <td>⊕ 1NO+1NC</td> <td>FR 515-M2R28</td> <td>⊕ 1NO+1NC</td> </tr> <tr> <td>6</td> <td><b>L</b></td> <td>FR 613-M2</td> <td>⊕ 1NO+1NC</td> <td>FR 614-M2</td> <td>⊕ 1NO+1NC</td> <td>FR 615-M2</td> <td>⊕ 1NO+1NC</td> <td>FR 615-M2R28</td> <td>⊕ 1NO+1NC</td> </tr> <tr> <td>7</td> <td><b>LO</b></td> <td>FR 713-M2</td> <td>⊕ 1NO+1NC</td> <td>FR 714-M2</td> <td>⊕ 1NO+1NC</td> <td>FR 715-M2</td> <td>⊕ 1NO+1NC</td> <td>FR 715-M2R28</td> <td>⊕ 1NO+1NC</td> </tr> <tr> <td>9</td> <td><b>L</b></td> <td>FR 913-M2</td> <td>⊕ 2NC</td> <td>FR 914-M2</td> <td>⊕ 2NC</td> <td>FR 915-M2</td> <td>⊕ 2NC</td> <td>FR 915-M2R28</td> <td>⊕ 2NC</td> </tr> <tr> <td>10</td> <td><b>L</b></td> <td>FR 1013-M2</td> <td>2NO</td> <td>FR 1014-M2</td> <td>2NO</td> <td>FR 1015-M2</td> <td>2NO</td> <td>FR 1015-M2R28</td> <td>2NO</td> </tr> <tr> <td>11</td> <td><b>R</b></td> <td>FR 1113-M2</td> <td>⊕ 2NC</td> <td>FR 1114-M2</td> <td>⊕ 2NC</td> <td>FR 1115-M2</td> <td>⊕ 2NC</td> <td>FR 1115-M2R28</td> <td>⊕ 2NC</td> </tr> <tr> <td>12</td> <td><b>R</b></td> <td>FR 1213-M2</td> <td>2NO</td> <td>FR 1214-M2</td> <td>2NO</td> <td>FR 1215-M2</td> <td>2NO</td> <td>FR 1215-M2R28</td> <td>2NO</td> </tr> <tr> <td>13</td> <td><b>LV</b></td> <td>FR 1313-M2</td> <td>⊕ 2NC</td> <td>FR 1314-M2</td> <td>⊕ 2NC</td> <td>FR 1315-M2</td> <td>⊕ 2NC</td> <td>FR 1315-M2R28</td> <td>⊕ 2NC</td> </tr> <tr> <td>14</td> <td><b>LS</b></td> <td>FR 1413-M2</td> <td>⊕ 2NC</td> <td>FR 1414-M2</td> <td>⊕ 2NC</td> <td>FR 1415-M2</td> <td>⊕ 2NC</td> <td>FR 1415-M2R28</td> <td>⊕ 2NC</td> </tr> <tr> <td>15</td> <td><b>LS</b></td> <td>FR 1513-M2</td> <td>2NO</td> <td>FR 1514-M2</td> <td>2NO</td> <td>FR 1515-M2</td> <td>2NO</td> <td>FR 1515-M2R28</td> <td>2NO</td> </tr> <tr> <td>18</td> <td><b>LA</b></td> <td>FR 1813-M2</td> <td>⊕ 1NO+1NC</td> <td>FR 1814-M2</td> <td>⊕ 1NO+1NC</td> <td>FR 1815-M2</td> <td>⊕ 1NO+1NC</td> <td>FR 1815-M2R28</td> <td>⊕ 1NO+1NC</td> </tr> <tr> <td>20</td> <td><b>L</b></td> <td>FR 2013-M2</td> <td>⊕ 1NO+2NC</td> <td>FR 2014-M2</td> <td>⊕ 1NO+2NC</td> <td>FR 2015-M2</td> <td>⊕ 1NO+2NC</td> <td>FR 2015-M2R28</td> <td>⊕ 1NO+2NC</td> </tr> <tr> <td>21</td> <td><b>L</b></td> <td>FR 2113-M2</td> <td>⊕ 3NC</td> <td>FR 2114-M2</td> <td>⊕ 3NC</td> <td>FR 2115-M2</td> <td>⊕ 3NC</td> <td>FR 2115-M2R28</td> <td>⊕ 3NC</td> </tr> <tr> <td>22</td> <td><b>L</b></td> <td>FR 2213-M2</td> <td>⊕ 2NO+1NC</td> <td>FR 2214-M2</td> <td>⊕ 2NO+1NC</td> <td>FR 2215-M2</td> <td>⊕ 2NO+1NC</td> <td>FR 2215-M2R28</td> <td>⊕ 2NO+1NC</td> </tr> <tr> <td>E1</td> <td></td> <td>FR E113-M2</td> <td>1NO-1NC</td> <td>FR E114-M2</td> <td>1NO-1NC</td> <td>FR E115-M2</td> <td>1NO-1NC</td> <td>FR E115-M2R28</td> <td>1NO-1NC</td> </tr> </tbody> </table>	2	<b>R</b>	FR 213-M2	2x(1NO-1NC)	FR 214-M2	2x(1NO-1NC)	FR 215-M2	2x(1NO-1NC)	FR 215-M2R28	2x(1NO-1NC)	5	<b>R</b>	FR 513-M2	⊕ 1NO+1NC	FR 514-M2	⊕ 1NO+1NC	FR 515-M2	⊕ 1NO+1NC	FR 515-M2R28	⊕ 1NO+1NC	6	<b>L</b>	FR 613-M2	⊕ 1NO+1NC	FR 614-M2	⊕ 1NO+1NC	FR 615-M2	⊕ 1NO+1NC	FR 615-M2R28	⊕ 1NO+1NC	7	<b>LO</b>	FR 713-M2	⊕ 1NO+1NC	FR 714-M2	⊕ 1NO+1NC	FR 715-M2	⊕ 1NO+1NC	FR 715-M2R28	⊕ 1NO+1NC	9	<b>L</b>	FR 913-M2	⊕ 2NC	FR 914-M2	⊕ 2NC	FR 915-M2	⊕ 2NC	FR 915-M2R28	⊕ 2NC	10	<b>L</b>	FR 1013-M2	2NO	FR 1014-M2	2NO	FR 1015-M2	2NO	FR 1015-M2R28	2NO	11	<b>R</b>	FR 1113-M2	⊕ 2NC	FR 1114-M2	⊕ 2NC	FR 1115-M2	⊕ 2NC	FR 1115-M2R28	⊕ 2NC	12	<b>R</b>	FR 1213-M2	2NO	FR 1214-M2	2NO	FR 1215-M2	2NO	FR 1215-M2R28	2NO	13	<b>LV</b>	FR 1313-M2	⊕ 2NC	FR 1314-M2	⊕ 2NC	FR 1315-M2	⊕ 2NC	FR 1315-M2R28	⊕ 2NC	14	<b>LS</b>	FR 1413-M2	⊕ 2NC	FR 1414-M2	⊕ 2NC	FR 1415-M2	⊕ 2NC	FR 1415-M2R28	⊕ 2NC	15	<b>LS</b>	FR 1513-M2	2NO	FR 1514-M2	2NO	FR 1515-M2	2NO	FR 1515-M2R28	2NO	18	<b>LA</b>	FR 1813-M2	⊕ 1NO+1NC	FR 1814-M2	⊕ 1NO+1NC	FR 1815-M2	⊕ 1NO+1NC	FR 1815-M2R28	⊕ 1NO+1NC	20	<b>L</b>	FR 2013-M2	⊕ 1NO+2NC	FR 2014-M2	⊕ 1NO+2NC	FR 2015-M2	⊕ 1NO+2NC	FR 2015-M2R28	⊕ 1NO+2NC	21	<b>L</b>	FR 2113-M2	⊕ 3NC	FR 2114-M2	⊕ 3NC	FR 2115-M2	⊕ 3NC	FR 2115-M2R28	⊕ 3NC	22	<b>L</b>	FR 2213-M2	⊕ 2NO+1NC	FR 2214-M2	⊕ 2NO+1NC	FR 2215-M2	⊕ 2NO+1NC	FR 2215-M2R28	⊕ 2NO+1NC	E1		FR E113-M2	1NO-1NC	FR E114-M2	1NO-1NC	FR E115-M2	1NO-1NC	FR E115-M2R28	1NO-1NC	<p>Max. speed</p> <p>Actuating force</p> <p>Travel diagrams</p>	<p>page 231 - type 2</p> <p>8 N (25 N ⊕)</p> <p>page 232 - group 1</p>	<p>page 231 - type 4</p> <p>8 N (25 N ⊕)</p> <p>page 232 - group 1</p>	<p>page 231 - type 2</p> <p>8 N (25 N ⊕)</p> <p>page 232 - group 1</p>	<p>page 231 - type 2</p> <p>8 N (25 N ⊕)</p> <p>page 232 - group 1</p>
2	<b>R</b>	FR 213-M2	2x(1NO-1NC)	FR 214-M2	2x(1NO-1NC)	FR 215-M2	2x(1NO-1NC)	FR 215-M2R28	2x(1NO-1NC)																																																																																																																																																												
5	<b>R</b>	FR 513-M2	⊕ 1NO+1NC	FR 514-M2	⊕ 1NO+1NC	FR 515-M2	⊕ 1NO+1NC	FR 515-M2R28	⊕ 1NO+1NC																																																																																																																																																												
6	<b>L</b>	FR 613-M2	⊕ 1NO+1NC	FR 614-M2	⊕ 1NO+1NC	FR 615-M2	⊕ 1NO+1NC	FR 615-M2R28	⊕ 1NO+1NC																																																																																																																																																												
7	<b>LO</b>	FR 713-M2	⊕ 1NO+1NC	FR 714-M2	⊕ 1NO+1NC	FR 715-M2	⊕ 1NO+1NC	FR 715-M2R28	⊕ 1NO+1NC																																																																																																																																																												
9	<b>L</b>	FR 913-M2	⊕ 2NC	FR 914-M2	⊕ 2NC	FR 915-M2	⊕ 2NC	FR 915-M2R28	⊕ 2NC																																																																																																																																																												
10	<b>L</b>	FR 1013-M2	2NO	FR 1014-M2	2NO	FR 1015-M2	2NO	FR 1015-M2R28	2NO																																																																																																																																																												
11	<b>R</b>	FR 1113-M2	⊕ 2NC	FR 1114-M2	⊕ 2NC	FR 1115-M2	⊕ 2NC	FR 1115-M2R28	⊕ 2NC																																																																																																																																																												
12	<b>R</b>	FR 1213-M2	2NO	FR 1214-M2	2NO	FR 1215-M2	2NO	FR 1215-M2R28	2NO																																																																																																																																																												
13	<b>LV</b>	FR 1313-M2	⊕ 2NC	FR 1314-M2	⊕ 2NC	FR 1315-M2	⊕ 2NC	FR 1315-M2R28	⊕ 2NC																																																																																																																																																												
14	<b>LS</b>	FR 1413-M2	⊕ 2NC	FR 1414-M2	⊕ 2NC	FR 1415-M2	⊕ 2NC	FR 1415-M2R28	⊕ 2NC																																																																																																																																																												
15	<b>LS</b>	FR 1513-M2	2NO	FR 1514-M2	2NO	FR 1515-M2	2NO	FR 1515-M2R28	2NO																																																																																																																																																												
18	<b>LA</b>	FR 1813-M2	⊕ 1NO+1NC	FR 1814-M2	⊕ 1NO+1NC	FR 1815-M2	⊕ 1NO+1NC	FR 1815-M2R28	⊕ 1NO+1NC																																																																																																																																																												
20	<b>L</b>	FR 2013-M2	⊕ 1NO+2NC	FR 2014-M2	⊕ 1NO+2NC	FR 2015-M2	⊕ 1NO+2NC	FR 2015-M2R28	⊕ 1NO+2NC																																																																																																																																																												
21	<b>L</b>	FR 2113-M2	⊕ 3NC	FR 2114-M2	⊕ 3NC	FR 2115-M2	⊕ 3NC	FR 2115-M2R28	⊕ 3NC																																																																																																																																																												
22	<b>L</b>	FR 2213-M2	⊕ 2NO+1NC	FR 2214-M2	⊕ 2NO+1NC	FR 2215-M2	⊕ 2NO+1NC	FR 2215-M2R28	⊕ 2NO+1NC																																																																																																																																																												
E1		FR E113-M2	1NO-1NC	FR E114-M2	1NO-1NC	FR E115-M2	1NO-1NC	FR E115-M2R28	1NO-1NC																																																																																																																																																												


All values in the drawings are in mm

Accessories See page 207


→ The 2D and 3D files are available at [www.pizzato.com](http://www.pizzato.com)

# FR series position switches


- Contact type
- R** = snap action
  - L** = slow action
  - LO** = slow action, make before break
  - LS** = slow action, shifted
  - LV** = slow action, shifted and spaced
  - LI** = slow action, independent
  - LA** = slow action, close
  - ⏏** = electronic, PNP




Secured only by means of threaded head in vertical position



External gasket  
Spring rod




External gasket  
Spring rod




Contact block

2	<b>R</b>	FR 216-M2	2x(1NO-1NC)	FR 217-M2	2x(1NO-1NC)	FR 220-M2	2x(1NO-1NC)	FR 221-M2	2x(1NO-1NC)
5	<b>R</b>	FR 516-M2	⊕ 1NO+1NC	FR 517-M2	⊕ 1NO+1NC	FR 520-M2	1NO+1NC	FR 521-M2	1NO+1NC
6	<b>L</b>	FR 616-M2	⊕ 1NO+1NC	FR 617-M2	⊕ 1NO+1NC	/	/	/	/
7	<b>LO</b>	FR 716-M2	⊕ 1NO+1NC	FR 717-M2	⊕ 1NO+1NC	/	/	/	/
9	<b>L</b>	FR 916-M2	⊕ 2NC	FR 917-M2	⊕ 2NC	/	/	/	/
10	<b>L</b>	FR 1016-M2	2NO	FR 1017-M2	2NO	FR 1020-M2	2NO	FR 1021-M2	2NO
11	<b>R</b>	FR 1116-M2	⊕ 2NC	FR 1117-M2	⊕ 2NC	/	/	/	/
12	<b>R</b>	FR 1216-M2	2NO	FR 1217-M2	2NO	FR 1220-M2	2NO	FR 1221-M2	2NO
13	<b>LV</b>	FR 1316-M2	⊕ 2NC	FR 1317-M2	⊕ 2NC	/	/	/	/
14	<b>LS</b>	FR 1416-M2	⊕ 2NC	FR 1417-M2	⊕ 2NC	/	/	/	/
15	<b>LS</b>	FR 1516-M2	2NO	FR 1517-M2	2NO	/	/	/	/
18	<b>LA</b>	FR 1816-M2	⊕ 1NO+1NC	FR 1817-M2	⊕ 1NO+1NC	FR 1820-M2	1NO+1NC	FR 1821-M2	1NO+1NC
20	<b>L</b>	FR 2016-M2	⊕ 1NO+2NC	FR 2017-M2	⊕ 1NO+2NC	FR 2020-M2	1NO+2NC	FR 2021-M2	1NO+2NC
21	<b>L</b>	FR 2116-M2	⊕ 3NC	FR 2117-M2	⊕ 3NC	FR 2120-M2	3NC	FR 2121-M2	3NC
22	<b>L</b>	FR 2216-M2	⊕ 2NO+1NC	FR 2217-M2	⊕ 2NO+1NC	FR 2220-M2	2NO+1NC	FR 2221-M2	2NO+1NC
E1	<b>⏏</b>	FR E116-M2	1NO-1NC	FR E117-M2	1NO-1NC	FR E120-M2	1NO-1NC	FR E121-M2	1NO-1NC
Max. speed		page 231 - type 2		page 231 - type 2		1 m/s		1 m/s	
Actuating force		8 N (25 N ⊕)		8 N (25 N ⊕)		0.07 Nm		0.07 Nm	
Travel diagrams		page 232 - group 1		page 232 - group 1		page 232 - group 4		page 232 - group 4	


- Contact type
- R** = snap action
  - L** = slow action
  - LO** = slow action, make before break
  - LS** = slow action, shifted
  - LV** = slow action, shifted and spaced
  - LI** = slow action, independent
  - LA** = slow action, close
  - ⏏** = electronic, PNP




External gasket  
Spring rod



With Ø 20 mm steel roller with self-lubrication or 316L stainless steel on request



Other rollers available. See page 66




Contact block

2	<b>R</b>	FR 222-M2	2x(1NO-1NC)	FR 225-M2	2x(1NO-1NC)	FR 230-M2	2x(1NO-1NC)	FR 231-M2	2x(1NO-1NC)
5	<b>R</b>	/	/	FR 525-M2	1NO+1NC	FR 530-M2	⊕ 1NO+1NC	FR 531-M2	⊕ 1NO+1NC
6	<b>L</b>	/	/	/	/	FR 630-M2	⊕ 1NO+1NC	FR 631-M2	⊕ 1NO+1NC
7	<b>LO</b>	/	/	/	/	FR 730-M2	⊕ 1NO+1NC	FR 731-M2	⊕ 1NO+1NC
9	<b>L</b>	/	/	/	/	FR 930-M2	⊕ 2NC	FR 931-M2	⊕ 2NC
10	<b>L</b>	FR 1022-M2	2NO	FR 1025-M2	2NO	FR 1030-M2	2NO	FR 1031-M2	2NO
11	<b>R</b>	/	/	/	/	FR 1130-M2	⊕ 2NC	FR 1131-M2	⊕ 2NC
12	<b>R</b>	FR 1222-M2	2NO	FR 1225-M2	2NO	FR 1230-M2	2NO	FR 1231-M2	2NO
13	<b>LV</b>	/	/	/	/	FR 1330-M2	⊕ 2NC	FR 1331-M2	⊕ 2NC
14	<b>LS</b>	/	/	/	/	FR 1430-M2	⊕ 2NC	FR 1431-M2	⊕ 2NC
15	<b>LS</b>	/	/	/	/	FR 1530-M2	2NO	FR 1531-M2	2NO
16	<b>LI</b>	/	/	/	/	FR 1630-M2	⊕ 2NC	FR 1631-M2	⊕ 2NC
18	<b>LA</b>	FR 1822-M2	⊕ 1NO+1NC	FR 1825-M2	1NO+1NC	FR 1830-M2	⊕ 1NO+1NC	FR 1831-M2	⊕ 1NO+1NC
20	<b>L</b>	FR 2022-M2	⊕ 1NO+2NC	FR 2025-M2	1NO+2NC	FR 2030-M2	⊕ 1NO+2NC	FR 2031-M2	⊕ 1NO+2NC
21	<b>L</b>	FR 2122-M2	⊕ 3NC	FR 2125-M2	3NC	FR 2130-M2	⊕ 3NC	FR 2131-M2	⊕ 3NC
22	<b>L</b>	FR 2222-M2	⊕ 2NO+1NC	FR 2225-M2	2NO+1NC	FR 2230-M2	⊕ 2NO+1NC	FR 2231-M2	⊕ 2NO+1NC
E1	<b>⏏</b>	FR E122-M2	1NO-1NC	FR E125-M2	1NO-1NC	FR E130-M2	1NO-1NC	FR E131-M2	1NO-1NC
Max. speed		1 m/s		1 m/s		page 231 - type 1		page 231 - type 1	
Actuating force		0.12 Nm (0.25 Nm ⊕)		0.12 Nm		0.06 Nm (0.25 Nm ⊕)		0.06 Nm (0.25 Nm ⊕)	
Travel diagrams		page 232 - group 4		page 232 - group 4		page 232 - group 5		page 232 - group 5	


All values in the drawings are in mm

Accessories See page 207

→ The 2D and 3D files are available at [www.pizzato.com](http://www.pizzato.com)

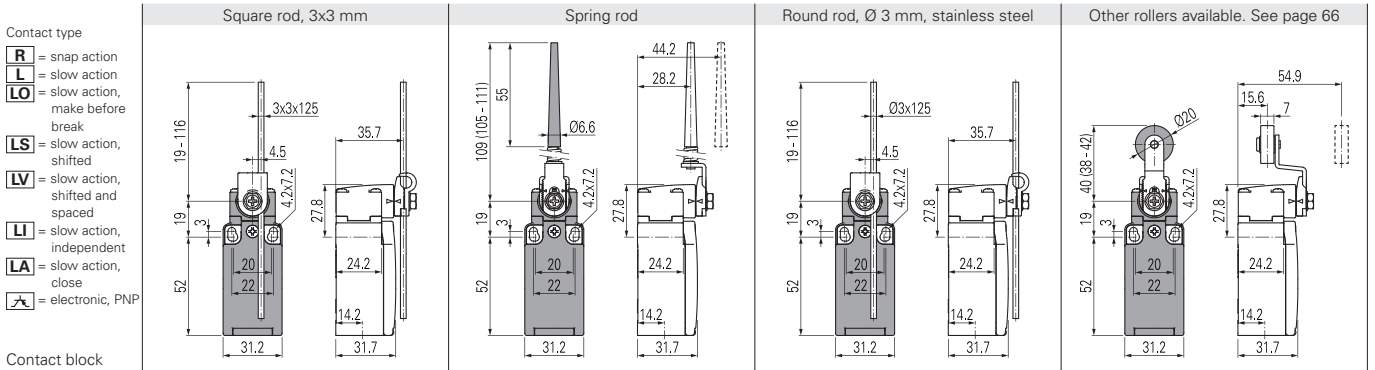

2	<b>R</b>	FR 233-M2	2x(1NO-1NC)	FR 234-M2	2x(1NO-1NC)	FR 250-M2	2x(1NO-1NC)	FR 251-M2	2x(1NO-1NC)
5	<b>R</b>	FR 533-M2	1NO+1NC	FR 534-M2	1NO+1NC	FR 550-M2	1NO+1NC	FR 551-M2	1NO+1NC ⊕
6	<b>L</b>	FR 633-M2	1NO+1NC	FR 634-M2	1NO+1NC	FR 650-M2	1NO+1NC	FR 651-M2	1NO+1NC ⊕
7	<b>LO</b>	FR 733-M2	1NO+1NC	FR 734-M2	1NO+1NC	FR 750-M2	1NO+1NC	FR 751-M2	1NO+1NC ⊕
9	<b>L</b>	FR 933-M2	2NC	FR 934-M2	2NC	FR 950-M2	2NC	FR 951-M2	2NC ⊕
10	<b>L</b>	FR 1033-M2	2NO	FR 1034-M2	2NO	FR 1050-M2	2NO	FR 1051-M2	2NO
11	<b>R</b>	FR 1133-M2	2NC	FR 1134-M2	2NC	FR 1150-M2	2NC	FR 1151-M2	2NC ⊕
12	<b>R</b>	FR 1233-M2	2NO	FR 1234-M2	2NO	FR 1250-M2	2NO	FR 1251-M2	2NO
13	<b>LV</b>	FR 1333-M2	2NC	FR 1334-M2	2NC	FR 1350-M2	2NC	FR 1351-M2	2NC ⊕
14	<b>LS</b>	FR 1433-M2	2NC	FR 1434-M2	2NC	FR 1450-M2	2NC	FR 1451-M2	2NC ⊕
15	<b>LS</b>	FR 1533-M2	2NO	FR 1534-M2	2NO	FR 1550-M2	2NO	FR 1551-M2	2NO
16	<b>LI</b>	FR 1633-M2	2NC	FR 1634-M2	2NC	FR 1650-M2	2NC	FR 1651-M2	2NC ⊕
18	<b>LA</b>	FR 1833-M2	1NO+1NC	FR 1834-M2	1NO+1NC	FR 1850-M2	1NO+1NC	FR 1851-M2	1NO+1NC ⊕
20	<b>L</b>	FR 2033-M2	1NO+2NC	FR 2034-M2	1NO+2NC	FR 2050-M2	1NO+2NC	FR 2051-M2	1NO+2NC ⊕
21	<b>L</b>	FR 2133-M2	3NC	FR 2134-M2	3NC	FR 2150-M2	3NC	FR 2151-M2	3NC ⊕
22	<b>L</b>	FR 2233-M2	2NO+1NC	FR 2234-M2	2NO+1NC	FR 2250-M2	2NO+1NC	FR 2251-M2	2NO+1NC ⊕
E1	<b>⚡</b>	FR E133-M2	1NO-1NC	FR E134-M2	1NO-1NC	FR E150-M2	1NO-1NC	FR E151-M2	1NO-1NC
Max. speed	1.5 m/s		1.5 m/s		1.5 m/s		page 231 - type 1		
Actuating force	0.06 Nm		0.06 Nm		0.06 Nm		0.06 Nm (0.25 Nm ⊕)		
Travel diagrams	page 232 - group 5		page 232 - group 5		page 232 - group 5		page 232 - group 5		

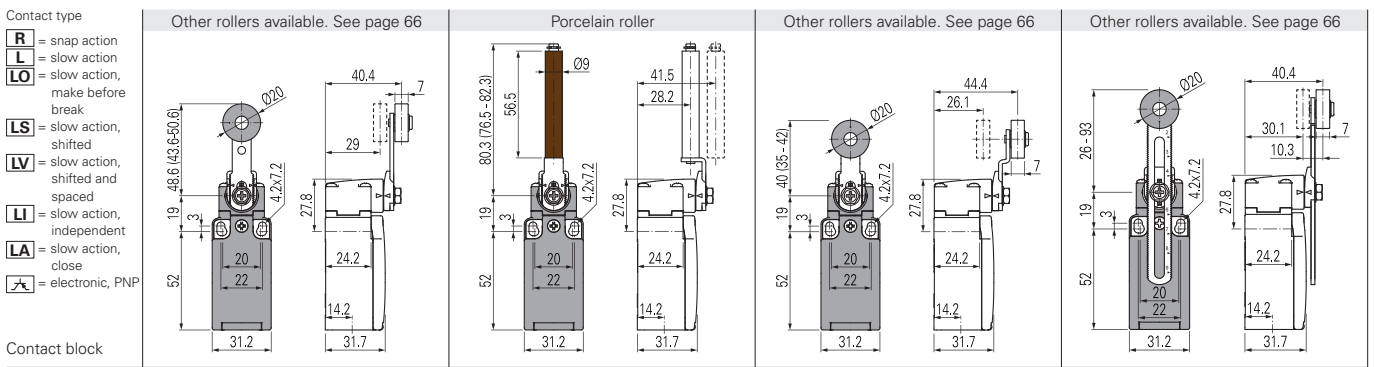

2	<b>R</b>	FR 252-M2	2x(1NO-1NC)	FR 253-E0M2	2x(1NO-1NC)	FR 254-M2	2x(1NO-1NC)	FR 256-M2	2x(1NO-1NC)
5	<b>R</b>	FR 552-M2	1NO+1NC ⊕	FR 553-E0M2V9	1NO+1NC ⊕	FR 554-M2	1NO+1NC ⊕	FR 556-M2	1NO+1NC ⊕
6	<b>L</b>	FR 652-M2	1NO+1NC ⊕	FR 653-E0M2V9	1NO+1NC ⊕	FR 654-M2	1NO+1NC ⊕	FR 656-M2	1NO+1NC ⊕
7	<b>LO</b>	FR 752-M2	1NO+1NC ⊕	FR 753-E0M2V9	1NO+1NC ⊕	FR 754-M2	1NO+1NC ⊕	FR 756-M2	1NO+1NC ⊕
9	<b>L</b>	FR 952-M2	2NC ⊕	FR 953-E0M2V9	2NC	FR 954-M2	2NC ⊕	FR 956-M2	2NC ⊕
10	<b>L</b>	FR 1052-M2	2NO	FR 1053-E0M2V9	2NO	FR 1054-M2	2NO	FR 1056-M2	2NO
11	<b>R</b>	FR 1152-M2	2NC ⊕	/	/	FR 1154-M2	2NC ⊕	FR 1156-M2	2NC ⊕
12	<b>R</b>	FR 1252-M2	2NO	FR 1253-E0M2V9	2NO	FR 1254-M2	2NO	FR 1256-M2	2NO
13	<b>LV</b>	FR 1352-M2	2NC ⊕	FR 1353-E0M2V9	2NC ⊕	FR 1354-M2	2NC ⊕	FR 1356-M2	2NC ⊕
14	<b>LS</b>	FR 1452-M2	2NC ⊕	FR 1453-E0M2V9	2NC ⊕	FR 1454-M2	2NC ⊕	FR 1456-M2	2NC ⊕
15	<b>LS</b>	FR 1552-M2	2NO	FR 1553-E0M2V9	2NO	FR 1554-M2	2NO	FR 1556-M2	2NO
16	<b>LI</b>	FR 1652-M2	2NC ⊕	/	/	FR 1654-M2	2NC ⊕	FR 1656-M2	2NC ⊕
18	<b>LA</b>	FR 1852-M2	1NO+1NC ⊕	FR 1853-E0M2V9	1NO+1NC ⊕	FR 1854-M2	1NO+1NC ⊕	FR 1856-M2	1NO+1NC ⊕
20	<b>L</b>	FR 2052-M2	1NO+2NC ⊕	FR 2053-E0M2V9	1NO+2NC ⊕	FR 2054-M2	1NO+2NC ⊕	FR 2056-M2	1NO+2NC ⊕
21	<b>L</b>	FR 2152-M2	3NC ⊕	FR 2153-E0M2V9	3NC ⊕	FR 2154-M2	3NC ⊕	FR 2156-M2	3NC ⊕
22	<b>L</b>	FR 2252-M2	2NO+1NC ⊕	FR 2253-E0M2V9	2NO+1NC ⊕	FR 2254-M2	2NO+1NC ⊕	FR 2256-M2	2NO+1NC ⊕
E1	<b>⚡</b>	FR E152-M2	1NO-1NC	FR E153-E0M2V9	1NO-1NC	FR E154-M2	1NO-1NC	FR E156-M2	1NO-1NC
Max. speed	page 231 - type 1		0.5 m/s		page 231 - type 1		page 231 - type 1		
Actuating force	0.06 Nm (0.25 Nm ⊕)		0.03 Nm (0.25 Nm ⊕)		0.06 Nm (0.25 Nm ⊕)		0.06 Nm (0.25 Nm ⊕)		
Travel diagrams	page 232 - group 5		page 232 - group 6		page 232 - group 5		page 232 - group 5		

(1) Positive opening only with actuator set to max. See page 66.

All values in the drawings are in mm

Accessories See page 207

➔ The 2D and 3D files are available at [www.pizzato.com](http://www.pizzato.com)



- Contact type
- R** = snap action
  - L** = slow action
  - LO** = slow action, make before break
  - LS** = slow action, shifted
  - LV** = slow action, shifted and spaced
  - LI** = slow action, independent
  - LA** = slow action, close
  - A** = electronic, PNP
- Contact block

		Other rollers available. See page 66	Glass fibre rod	Rope switch for signalling			
2	<b>R</b>	FR 257-M2	2x(1NO-1NC)	FR 269-M2	2x(1NO-1NC)	FR 276-M2	2x(1NO-1NC)
5	<b>R</b>	FR 557-M2	⊕ 1NO+1NC	FR 569-M2	1NO+1NC	FR 576-M2	1NO+1NC
6	<b>L</b>	FR 657-M2	⊕ 1NO+1NC	FR 669-M2	1NO+1NC	FR 676-M2	1NO+1NC
7	<b>LO</b>	FR 757-M2	⊕ 1NO+1NC	FR 769-M2	1NO+1NC	FR 776-M2	1NO+1NC
9	<b>L</b>	FR 957-M2	⊕ 2NC	FR 969-M2	2NC	FR 976-M2	2NO
10	<b>L</b>	FR 1057-M2	2NO	FR 1069-M2	2NO	FR 1076-M2	2NC
11	<b>R</b>	FR 1157-M2	⊕ 2NC	FR 1169-M2	2NC	FR 1176-M2	2NO
12	<b>R</b>	FR 1257-M2	2NO	FR 1269-M2	2NO	FR 1276-M2	2NC
13	<b>LV</b>	FR 1357-M2	⊕ 2NC	FR 1369-M2	2NC	FR 1376-M2	2NO
14	<b>LS</b>	FR 1457-M2	⊕ 2NC	FR 1469-M2	2NC	FR 1476-M2	2NO
15	<b>LS</b>	FR 1557-M2	2NO	FR 1569-M2	2NO	FR 1576-M2	2NC
16	<b>LI</b>	FR 1657-M2	⊕ 2NC	FR 1669-M2	2NC		/
18	<b>LA</b>	FR 1857-M2	⊕ 1NO+1NC	FR 1869-M2	1NO+1NC	FR 1876-M2	1NO+1NC
20	<b>L</b>	FR 2057-M2	⊕ 1NO+2NC	FR 2069-M2	1NO+2NC	FR 2076-M2	2NO+1NC
21	<b>L</b>	FR 2157-M2	⊕ 3NC	FR 2169-M2	3NC	FR 2176-M2	3NO
22	<b>L</b>	FR 2257-M2	⊕ 2NO+1NC	FR 2269-M2	2NO+1NC	FR 2276-M2	1NO+2NC
E1	<b>A</b>	FR E157-M2	1NO-1NC	FR E169-M2	1NO-1NC		/
Max. speed		page 231 - type 1		1.5 m/s	0.5 m/s		
Actuating force		0.06 Nm (0.25 Nm ⊕)		0.06 Nm	initial 20 N - final 40 N		
Travel diagrams		page 232 - group 5		page 232 - group 5	page 232 - group 7		

## FR series position switches with reset



The majority of switches can be equipped with a reset device (option W3) which enables the simultaneous actuation of actuator and contact block. The device is a module that is mounted between the body and the head of the switch that can be rotated independently from the head. The reset device has the following advantages:

- can be integrated into the majority of standard actuator heads;
- contact blocks with snap action are no more necessary because the tripping movement is executed by the reset device itself;
- can be rotated independently from the head ensuring maximum flexibility during installation;
- can be delivered with two different actuating forces: standard and increased for vibration applications;
- mechanical endurance: 1 million operating cycles.

- Contact type
- R** = snap action
  - L** = slow action

			With steel roller with self-lubrication or 316L stainless steel on request	With steel roller with self-lubrication or 316L stainless steel on request					
2	<b>R</b>	FR 201-W3M2	2x(1NO-1NC)	FR 202-W3M2	2x(1NO-1NC)	FR 205-W3M2	2x(1NO-1NC)	FR 207-W3M2	2x(1NO-1NC)
6	<b>L</b>	FR 601-W3M2	⊕ 1NO+1NC	FR 602-W3M2	⊕ 1NO+1NC	FR 605-W3M2	⊕ 1NO+1NC	FR 607-W3M2	⊕ 1NO+1NC
9	<b>L</b>	FR 901-W3M2	⊕ 2NC	FR 902-W3M2	⊕ 2NC	FR 905-W3M2	⊕ 2NC	FR 907-W3M2	⊕ 2NC
10	<b>L</b>	FR 1001-W3M2	2NO	FR 1002-W3M2	2NO	FR 1005-W3M2	2NO	FR 1007-W3M2	2NO
20	<b>L</b>	FR 2001-W3M2	⊕ 1NO+2NC	FR 2002-W3M2	⊕ 1NO+2NC	FR 2005-W3M2	⊕ 1NO+2NC	FR 2007-W3M2	⊕ 1NO+2NC
21	<b>L</b>	FR 2101-W3M2	⊕ 3NC	FR 2102-W3M2	⊕ 3NC	FR 2105-W3M2	⊕ 3NC	FR 2107-W3M2	⊕ 3NC
22	<b>L</b>	FR 2201-W3M2	⊕ 2NO+1NC	FR 2202-W3M2	⊕ 2NO+1NC	FR 2205-W3M2	⊕ 2NO+1NC	FR 2207-W3M2	⊕ 2NO+1NC
Max. speed		page 231 - type 4		page 231 - type 3		page 231 - type 3		page 231 - type 3	
Actuating force		4.5 N (25 N ⊕)		4 N (25 N ⊕)		4 N (25 N ⊕)		2.5 N (25 N ⊕)	
Travel diagrams		page 233 - group 1		page 233 - group 2		page 233 - group 2		page 233 - group 3	

All values in the drawings are in mm

Accessories See page 207

→ The 2D and 3D files are available at [www.pizzato.com](http://www.pizzato.com)



Contact type	With Ø 12 mm steel roller with self-lubrication or 316L stainless steel on request		With Ø 20 mm steel roller with self-lubrication or 316L stainless steel on request		Other rollers available. See page 66		Other rollers available. See page 66	
	<b>R</b> = snap action <b>L</b> = slow action							
Contact block								
	2 <b>R</b>	FR 215-W3M2 2x(1NO-1NC)	FR 230-W3M2 2x(1NO-1NC)	FR 231-W3M2 2x(1NO-1NC)	FR 251-W3M2 2x(1NO-1NC)			
	6 <b>L</b>	FR 615-W3M2 1NO+1NC	FR 630-W3M2 1NO+1NC	FR 631-W3M2 1NO+1NC	FR 651-W3M2 1NO+1NC			
	9 <b>L</b>	FR 915-W3M2 2NC	FR 930-W3M2 2NC	FR 931-W3M2 2NC	FR 951-W3M2 2NC			
	10 <b>L</b>	FR 1015-W3M2 2NO	FR 1030-W3M2 2NO	FR 1031-W3M2 2NO	FR 1051-W3M2 2NO			
	20 <b>L</b>	FR 2015-W3M2 1NO+2NC	FR 2030-W3M2 1NO+2NC	FR 2031-W3M2 1NO+2NC	FR 2051-W3M2 1NO+2NC			
	21 <b>L</b>	FR 2115-W3M2 3NC	FR 2130-W3M2 3NC	FR 2131-W3M2 3NC	FR 2151-W3M2 3NC			
	22 <b>L</b>	FR 2215-W3M2 2NO+1NC	FR 2230-W3M2 2NO+1NC	FR 2231-W3M2 2NO+1NC	FR 2251-W3M2 2NO+1NC			
Max. speed	page 231 - type 2		page 231 - type 1		page 231 - type 1		page 231 - type 1	
Actuating force	4.5 N (25 N ⊕)		0.07 Nm (0.25 Nm ⊕)		0.07 Nm (0.25 Nm ⊕)		0.07 Nm (0.25 Nm ⊕)	
Travel diagrams	page 233 - group 1		page 233 - group 4		page 233 - group 4		page 233 - group 4	

Contact type	Other rollers available. See page 66		Other rollers available. See page 66		Other rollers available. See page 66		Other rollers available. See page 66	
	<b>R</b> = snap action <b>L</b> = slow action							
Contact block								
	2 <b>R</b>	FR 252-W3M2 2x(1NO-1NC)	FR 254-W3M2 2x(1NO-1NC)	FR 256-W3M2 2x(1NO-1NC)	FR 257-W3M2 2x(1NO-1NC)			
	6 <b>L</b>	FR 652-W3M2 1NO+1NC	FR 654-W3M2 1NO+1NC	FR 656-W3M2 1NO+1NC	FR 657-W3M2 1NO+1NC			
	9 <b>L</b>	FR 952-W3M2 2NC	FR 954-W3M2 2NC	FR 956-W3M2 2NC	FR 957-W3M2 2NC			
	10 <b>L</b>	FR 1052-W3M2 2NO	FR 1054-W3M2 2NO	FR 1056-W3M2 2NO	FR 1057-W3M2 2NO			
	20 <b>L</b>	FR 2052-W3M2 1NO+2NC	FR 2054-W3M2 1NO+2NC	FR 2056-W3M2 1NO+2NC	FR 2057-W3M2 1NO+2NC			
	21 <b>L</b>	FR 2152-W3M2 3NC	FR 2154-W3M2 3NC	FR 2156-W3M2 3NC	FR 2157-W3M2 3NC			
	22 <b>L</b>	FR 2252-W3M2 2NO+1NC	FR 2254-W3M2 2NO+1NC	FR 2256-W3M2 2NO+1NC	FR 2257-W3M2 2NO+1NC			
Max. speed	page 231 - type 1		page 231 - type 1		page 231 - type 1		page 231 - type 1	
Actuating force	0.07 Nm (0.25 Nm ⊕)		0.07 Nm (0.25 Nm ⊕)		0.07 Nm (0.25 Nm ⊕)		0.07 Nm (0.25 Nm ⊕)	
Travel diagrams	page 233 - group 4		page 233 - group 4		page 233 - group 4		page 233 - group 4	

### Increased actuating force



The switch can be delivered with increased actuating force (option W4). Ideal for vibration applications.




Actuators	Actuating force
01, 14, 15, 16	7 N
02, 05	6 N
07	3.5 N
30 ... 57	0.08 Nm

To order the switch with reset and increased actuating force, replace the -W3 option with -W4 in the order code.


Example: FR 601-W3M2 → FR 601-W4M2

## Position switches with swivelling lever without actuator

- Contact type
- R** = snap action
  - L** = slow action
  - LO** = slow action, make before break
  - LS** = slow action, shifted
  - LV** = slow action, shifted and spaced
  - LI** = slow action, independent
  - LA** = slow action, close
  - A** = electronic, PNP



With manual reset knob



### IMPORTANT

**For safety applications:** join only switches and actuators marked with symbol next to the product code. For more information about safety applications see details on page 225.

Contact block	FR 238-M2	2x(1NO-1NC)	FR 238-W3M2	2x(1NO-1NC)
2	<b>R</b>		/	
5	<b>R</b>		/	
6	<b>L</b>		FR 638-W3M2	1NO+1NC
7	<b>LO</b>		/	
9	<b>L</b>		FR 938-W3M2	2NC
10	<b>L</b>		FR 1038-W3M2	2NO
11	<b>R</b>		/	
12	<b>R</b>		/	
13	<b>LV</b>		/	
14	<b>LS</b>		/	
15	<b>LS</b>		/	
16	<b>LI</b>		/	
18	<b>LA</b>		/	
20	<b>L</b>		FR 2038-W3M2	1NO+2NC
21	<b>L</b>		FR 2138-W3M2	3NC
22	<b>L</b>		FR 2238-W3M2	2NO+1NC
E1	<b>A</b>		/	
Actuating force	0.06 Nm (0.25 Nm		0.07 Nm (0.25 Nm	
Travel diagrams	page 232 - group 5		page 233 - group 4	

## Separate actuators

**IMPORTANT:** These separate actuators can be used only with items of the FR, FM, FX, FZ, FK, NA, NB and NF series.

Technopolymer roller Ø 18 mm	Technopolymer roller Ø 18 mm	Technopolymer roller Ø 14 mm	Technopolymer roller Ø 14 mm	Technopolymer roller Ø 20 mm	Technopolymer roller Ø 20 mm
VN A00KA	VN A00KB	VN A00KC	VN A00KD	VN A00KE	VN A00KF
Technopolymer roller Ø 20 mm	Technopolymer roller Ø 20 mm	Adjustable safety actuator with technopolymer roller	Adjustable square rod, 3x3x125 mm	Adjustable round rod Ø 3x125 mm	Adjustable glass fibre rod
VN A00KG	VN A00KH	VN A00KP	VN A00LB	VN A00LE	VN A00LH
Spring rod with plastic tip	Porcelain roller	Technopolymer roller Ø 14 mm	Technopolymer roller Ø 14 mm	Technopolymer roller Ø 20 mm	Adjustable safety lever with technopolymer roller Ø 20 mm
		With metallic parts in stainless steel			
VN A00LL	VN A00LP  (2)	VN A00KB-V38	VN A00KE-V38	VN A00KG-V38	VN A00KP-V38

All values in the drawings are in mm

Accessories See page 207

→ The 2D and 3D files are available at [www.pizzato.com](http://www.pizzato.com)

**Special separate actuators**
**IMPORTANT:** These separate actuators can be used only with items of the FR, FM, FX, FZ, FK, NA, NB and NF series.

Steel rollers, Ø 20 mm, with self-lubrication					
VN A00KB-R24 (1)	VN A00KE-R24 (1)	VN A00KF-R24 (1)	VN A00KG-R24 (1)	VN A00KH-R24 (1)	VN A00KP-R24 (1)

**Note:** To order with 316L stainless steel roller: replace R24 with R41 in the order numbers.

Technopolymer rollers, Ø 35 mm					
VN A00KB-R25 (1)	VN A00KE-R25 (1)	VN A00KF-R25 (1)	VN A00KG-R25 (1)	VN A00KH-R25 (1)	VN A00KP-R25 (1)

Rubber rollers, Ø 40 mm					
VN A00KB-R5 (1)	VN A00KE-R5 (1)	VN A00KF-R5 (1)	VN A00KG-R5 (1)	VN A00KH-R5 (1)	VN A00KP-R5 (1)

Rubber rollers, Ø 50 mm				
VN A00KE-R26 (1)	VN A00KF-R26 (1)	VN A00KG-R26 (1)	VN A00KH-R26 (1)	VN A00KP-R26 (1)

Protruding rubber rollers, Ø 50 mm
VN A00KP-R27 (1)

- (1) The actuator cannot be rotated to the inside because it will hit the switch head upon actuation.

- (2) The position switch obtained by assembling switch FR •38-M2 (e.g. FR 538-M2, FR 638-M2, ...) with actuator VN A00LP will not present the same travel diagrams and actuating forces as switch FR •53-E0M2V9 (e.g. FR 553-E0M2V9, FR 653-E0M2V9, ...)

**Note:** To check the correspondence with previous lever codes, please consult the table "Changed article codes" on page 289. Example: VF LE30 -> VN A00KA.