


MINGATA mini

612171.0031.1.Z1 | Pole luminaires



Outdoor luminaires and pole top luminaires
4051859716747
L 530, B 270, H 100

Pole mounting
anthracite metallic (DB703)

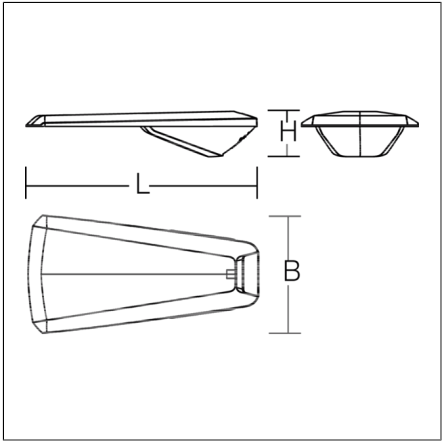

Functional pole-side and pole-top luminaire in a modern design. Housing made of corrosion-resistant die-cast aluminium, seawater resistant powder-coated. Pole-top fixing with integrated cable routing and stainless steel screws. With membrane valve as a standard to avoid condensed water. Cover clear single-pane toughened glass. Asymmetrical light distribution. Luminaires for pole top Ø 76 mm (with optional adapter sleeve, also suitable for pole top Ø 60 mm). Tool-free maintenance / replacement by Eccentric-Lock system with disconnect plug and Hybrid-Lock-System. 4 x 1.0 mm² connecting cable included, length 8 m.

Product specifications

Length L	530 mm
Width B	270 mm
Height H	100 mm
Weight	5.4 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux	2000 lm
System power	15 W
System efficiency	133 lm/W
Glare evaluation UGR (4H 8H)	32,4
Beam angle	76°/48°/76°/2°
Rated life	100000 h (L80/B50)
Colour rendering index (CRI)	70
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	DALI Zhaga
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	13
Luminaires on B16A fuse	21
Luminaires on C10A fuse	21
Luminaires on C16A fuse	35
Inrush current / Inrush current duration	21 A / 300 µs
CIE Flux Code / CEN Flux Code	41 77 98 100 100
Type of protection	IP 66
Protection class	II
Filament test	960 °C
Impact resistance	IK08
Ambient temperature	-20 °C ... + 50 °C
Conformity mark	CE

MINGATA mini

612171.0031.1.Z1 | Pole luminaires



Accessories



982562.000
Reducing adapter Ø 60 mm



982589.000
Pole bracket for 3 luminaires, uncoated



982591.000
Wall bracket, uncoated



982591.0031
Wall bracket, powder-coated



982588.000
Pole bracket for 2 luminaires, uncoated



982590.000
Pole bracket for 4 luminaires, uncoated



61199.009
Fuse box