


LUCIO 2

672527.002.07 | Stand-by luminaires for escape route illumination



Ceiling luminaires
4051859721321
D 110, H 46

Ceiling mounting
white

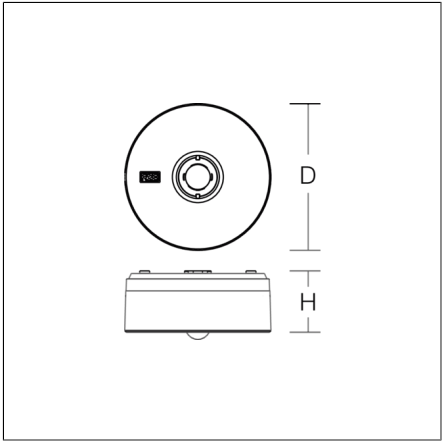

Round surface-mounted downlight. For escape route illumination. Housing: plastic (polycarbonate). Cover: polycarbonate. Plastic lenses for area lighting and escape route illumination included in scope of delivery. Suitable for Ceiling mounting. Self-contained system with automatic self-test and feedback via DALI bus, only to RZB DALI monitoring system.

Product specifications

Type of emergency lighting	Self-contained system
Monitoring	DALI-Sibe
Battery	LiFePO4
Duration	3 h, 8 h
Operating mode	non-maintained power mode
Diameter D	110 mm
Height H	46 mm
Weight	0.29 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux, emergency operation	3 h: 240 lm 8 h: 120 lm
Colour rendering index (CRI)	70
Photobiological safety according to EN 62471	Risk group 2
Driver	Electronic ballast in emergency mode only
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	30
Luminaires on B16A fuse	40
Luminaires on C10A fuse	30
Luminaires on C16A fuse	40
Type of protection	IP 20
Protection class	II
Filament test	850 °C
Impact resistance	IK06
Ambient temperature for non-maintained power mode	0 °C ... + 25 °C
Safety marks	Do not cover the recessed luminaire!
Conformity mark	CE

Accessories



982792.002
Optic lenses




982791.002
Mounting bracket for surface installation

LUCIO 2

672527.002.07 | Stand-by luminaires for escape route illumination



982790.002
Recessed ceiling housing



983086.000
Asymmetrical lens for areas to be highlighted



983172.000
Square area lens for anti-panic lighting