


LUCIO 2

672526.003 | Stand-by luminaires for escape route illumination



Recessed ceiling luminaires, Ceiling luminaires
4051859769613
D 135, H 2

Ceiling mounting, Recessed ceiling mounting
black

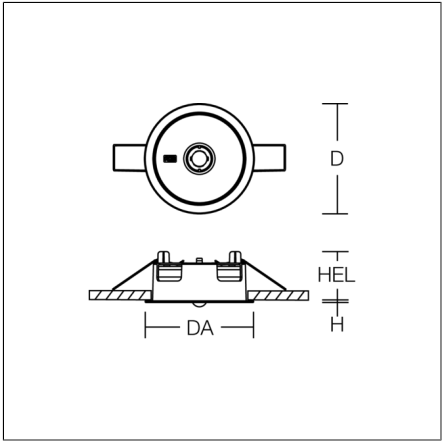

Round recessed downlight. For escape route illumination. Housing: plastic (polycarbonate). Cover: polycarbonate. Plastic lenses for area lighting and escape route illumination included in scope of delivery. Suitable for Ceiling mounting, Recessed ceiling mounting. Electronic ballast included. Self-contained system with automatic self-test.

Product specifications

Type of emergency lighting	Self-contained system
Monitoring	Autotest
Battery	LiFePO4
Duration	3 h, 8 h
Operating mode	non-maintained power mode
Diameter D	135 mm
Height H	2 mm
Cut-out diameter DA	116-120 mm
Luminaire: recess height HEL	60 mm
Ceiling thickness S	1-40 mm
Weight	0.355 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux, emergency operation	3 h: 240 lm 8 h: 120 lm
Colour rendering index (CRI)	70
Photobiological safety according to EN 62471	Risk group 2
Driver	Electronic ballast in emergency mode only
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	30
Luminaires on B16A fuse	40
Luminaires on C10A fuse	30
Luminaires on C16A fuse	40
Type of protection	IP 20
Protection class	II
Filament test	850 °C
Impact resistance	IK06
Ambient temperature for non-maintained power mode	0 °C ... + 25 °C
Safety marks	Do not cover the recessed luminaire!
Conformity mark	CE

Accessories



982791.003
Mounting bracket for surface installation



983172.000
Square area lens for anti-panic lighting

LUCIO 2

672526.003 | Stand-by luminaires for escape route illumination



982792.002
Optic lenses



983086.000
Asymmetrical lens for areas to be highlighted