



# CorePro GLASS LED candles and lusters



## CorePro LEDLusterND6.5-60W P45 E27827CLG

Featuring a classic heritage design, these filament LED candle combines the familiar shapes of classic incandescent bulbs with the benefits of long-lasting LED technology. The LED candle bulb, a very easy choice for people who are looking for a retrofit LED replacement, the LED candle provides 90% energy savings compared with conventional lamps. CorePro Glass LED bulbs provide excellent quality of light for stairway lighting. The LED candle bulb offers a lifetime of 15,000 hours to reduce maintenance costs.

#### **Product data**

General Information	
Cap-Base	E27
Nominal lifetime	15,000 hour(s)
Switching Cycle	20,000
Lighting Technology	LED
Flux measurement reference	Sphere
Light Technical	
Color Code	827 [CCT of 2700K]
Luminous Flux	806 lm
Color Designation	Warm White (WW)
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	124.00 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Photobiological safety according to EN 62471	RG1

Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	6.5 W
Lamp Current (Nom)	50 mA
Wattage Equivalent	60 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.55
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	55 °C
Controls and Dimming	
Dimmable	No


Datasheet, 2025, March 17 data subject to change

# CorePro GLASS LED candles and lusters

Mechanical and Housing	
Bulb Finish	Clear
Bulb Shape	P45
Net Weight (Piece)	0.014 kg
Approval and Application	
Energy Efficiency Class	E
Energy Consumption kWh/1000 h	7 kWh
EPREL Registration Number	1825189
CE mark	Yes
EU RoHS compliant	Yes
EyeComfort	Yes
Flickering value (PstLM) - Flickering value as	1
per EN 61000-3-3	
Stroboscopic effect visibility measure (SVM)	0.9
Application Conditions	
can it be used in closed luminaires	No


Product Data	
Order product name	CorePro LEDLusterND6.5-60W P45
	E27827CLG
Full product name	CorePro LEDLusterND6.5-60W P45
	E27827CLG
Full product code	871951434766300
Order code	929002029092
Material Nr. (12NC)	929002029092
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8719514347663
Numerator - Packs per outer box	10
EAN/UPC - Case	8719514347670


# Dimensional drawing



Product	D	С
CorePro LEDLusterND6.5-60W P45 E27827CLG	45 mm	78 mm

## Photometric data






General uniform lighting - CorePro LEDLusterND6.5-60W P45 E27827CLG

Light Distribution Diagram - CorePro LEDLusterND6.5-60W P45 E27827CLG


## CorePro GLASS LED candles and lusters


#### Photometric data

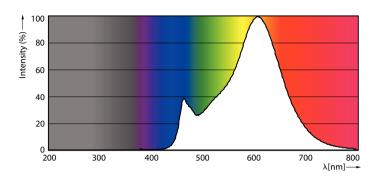

Spectral Power Distribution Colour - CorePro LEDLusterND6.5-60W P45 E27827CLG

#### Lifetime

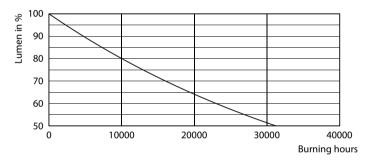



Lumen Maintenance Diagram - CorePro LEDLusterND6.5-60W P45 E27827CLG

Life Expectancy Diagram



© 2025 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.