

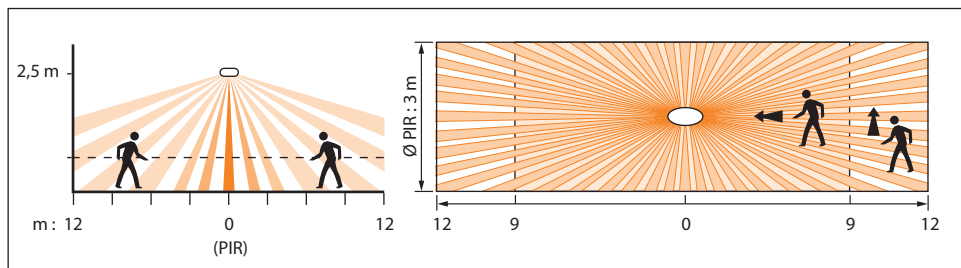





BMSA2205	
	100 - 240 V~
	50 / 60 Hz
	2 x 2,5 mm ²
	(-5) - (+45) °C
	PIR
	150 lux
	10 mn
	3 m x 24 m



230 V~	2000 W	1000 VA	10x(2x36 W)	10x(2x36 W)	500 VA	500 VA	1000 VA	1000 VA	500 VA	500 VA	I max. ≤ 2A
110 V~	1000 W	500 VA	5x(2x36 W)	5x(2x36 W)	250 VA	250 VA	500 VA	500 VA	250 VA	250 VA	
	8,5 A	4,3 A			4,3 A	2,1 A	4,3 A	4,3 A	2,1 A		

(*) Non collegare differenti tipologie di carico allo stesso prodotto
 (*) Utilizzare solamente trasformatori progettati per funzionare con interruttori elettronici

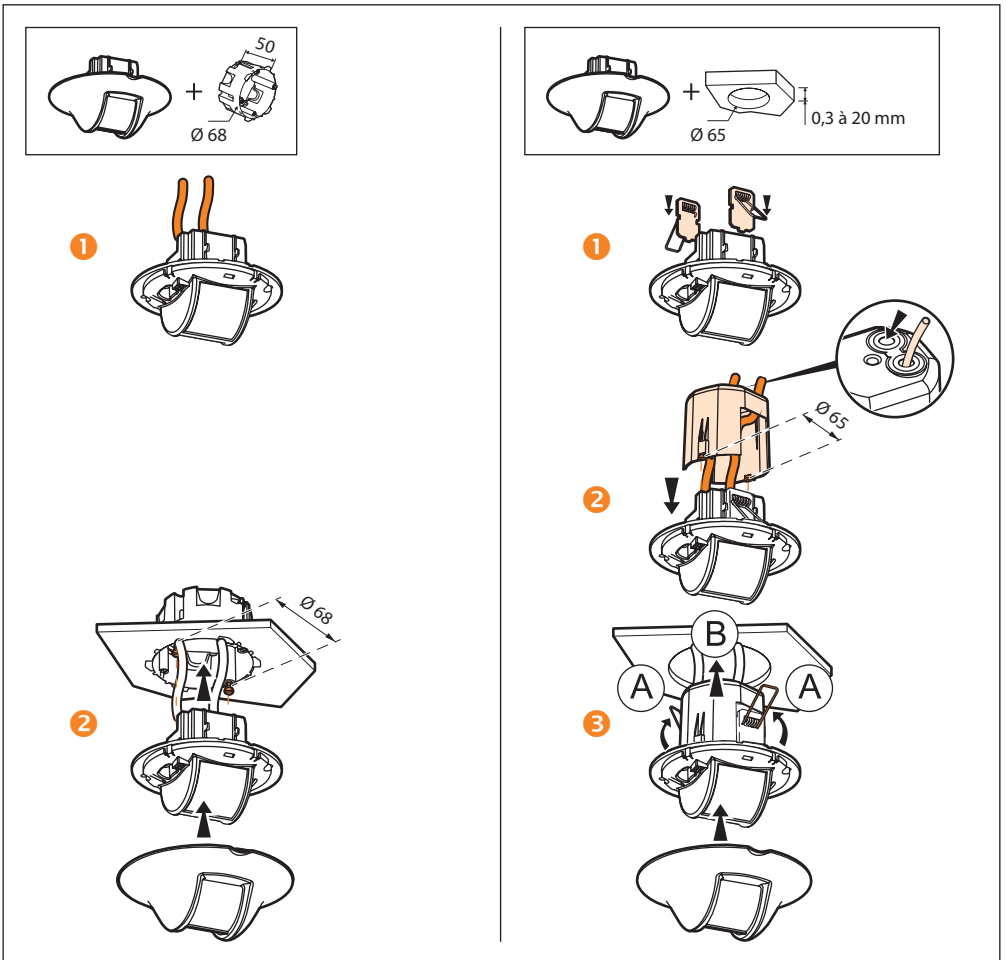

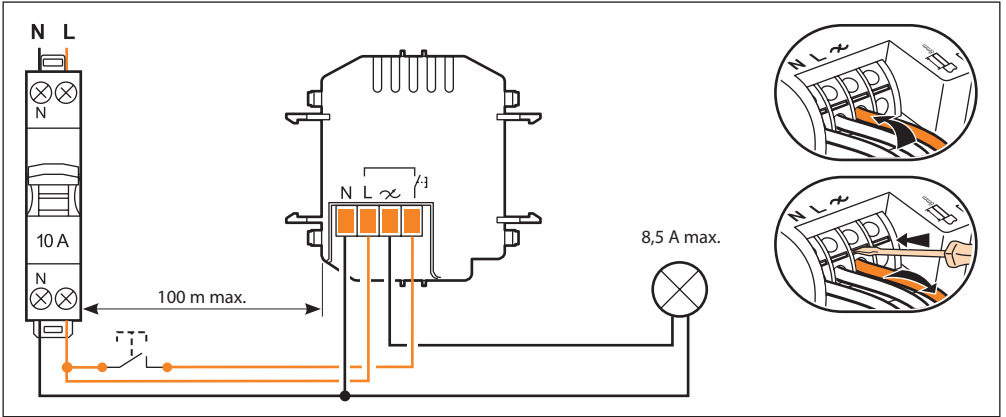

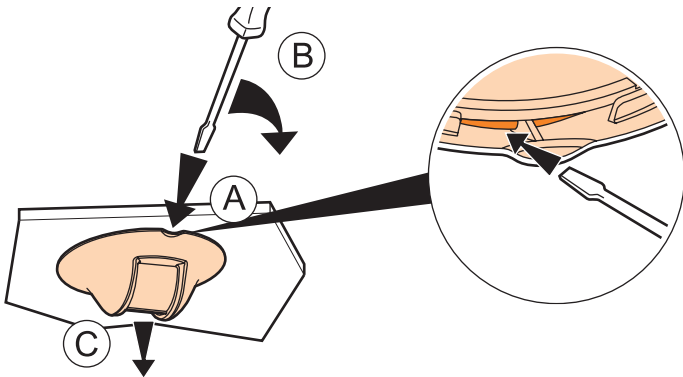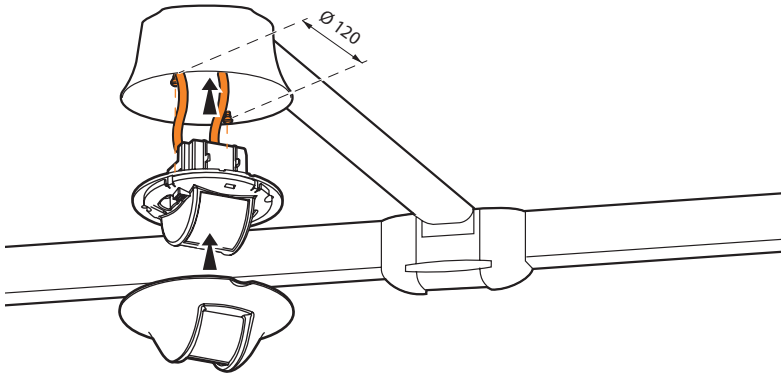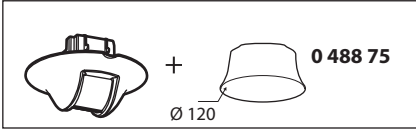

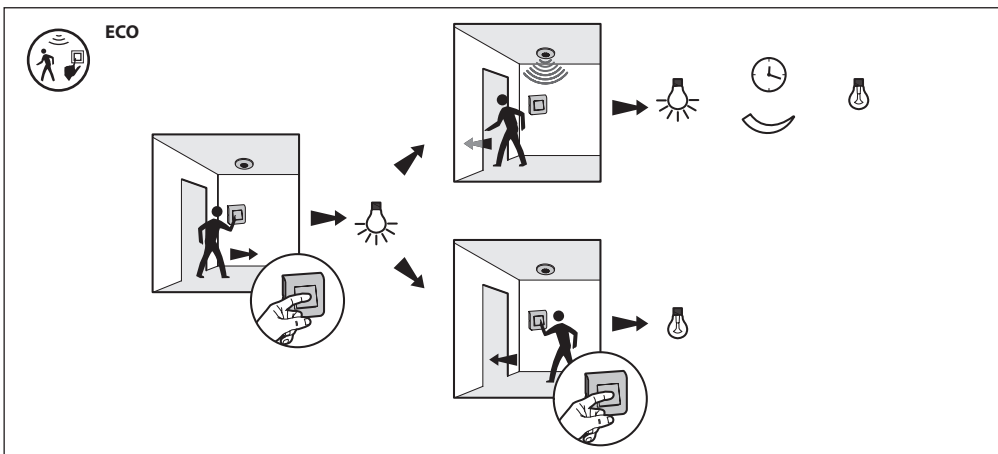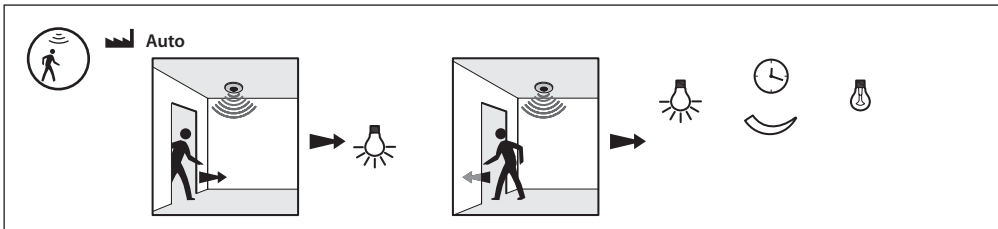

Al primo utilizzo: Scaricare l'app Legrand Close Up su Apple Store o Play Store.

Ref. 0 882 40: Gateway di configurazione

App Store Google Play

App: «Legrand Close Up»

Per maggiori informazioni sulle impostazioni, consultare la scheda tecnica del gateway di configurazione Ref. 0 882 40.

	5 - 1275 lux
	5 sec - 59 min 59 sec
	25% - 50% - 75% - 100% Bassa - Media - Alta - Massima
Modo	auto - manual

LEARN

LED

LEARN

LED IR