
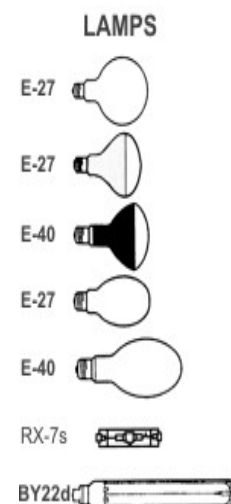
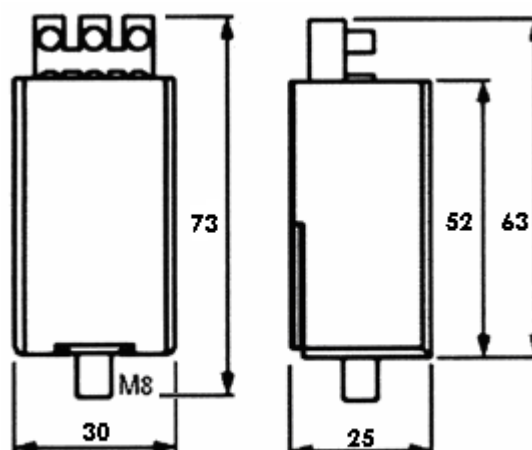


ELECTRONIC IGNITORS FOR DISCHARGED LAMPS 70-400W TYPE CD 400 4K

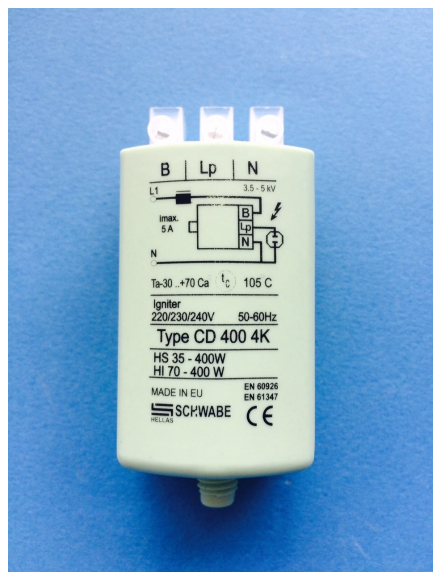

TECHNICAL DATA	IGNITOR CD400 4K	LAMPS
Approved mains voltage [V]	198...264	HST-DE 70 W Super HS 100 W HS 150 W HS 250 W HS 400 W HI 70 W HI 150 W HI 250 W HI 400 W CDM-T 35 W (PHILIPS) CDM-T 70 W (PHILIPS) CDM-T 150 W (PHILIPS)
Approved mains frequency [Hz]	50/60	
Max. continuous lamp current [A]	4.6	
Connecting terminal [mm ²]	2.5	
Response / cut out voltage [V]	≤98 / ≥170	
Ignition voltage [kV]	4,0...5,0	
Timer ignition time [s]		
Phase position [°el]	60...90/ 240...270	
Pulses per cycle	≥60	
Approved load capacity [pF]	20...100	
Internal losses at 25°C ambient temperature [W]	<3,0 (4,6A)	
Temperature rise at 25°C ambient temperature [K]	<32 (4,6A)	
Max. housing temperature [°C]	105	
Approved ambient temp. t(u) [°C]	-30...+70	
Connection Distance to the lamp [m]	2	
Screw terminals [mm ²]	1 - 2.5	
Weight [kg]	0.12	