Completely pre-assembled Signal Towers / KOMPAKT 37 K37 cable EM Pulse tone 24VAC/DC BU/GN/Y



ļ

Part No.:	699.150.75	
Series:	Kompakt 37	
MECHANI	CAL DATA	
Height		209 mm
Diameter		38 mm
Materials		PC
Dome colour		Blue Green Red Yellow
Housing colour		Black
Protection category		IP65
Connection		Cable
cross-sectional area maximum		0,34mm² / 22AWG
Cable entry		Membrane grommet
Cable entry minimum		d = 1 mm
Cable entry maximum		d = 9 mm
Cable length		2000 mm
Tension relief		Pull-out protection
Type of fix	ing	Built-in mounting
Working temperature minimum		-20°C
Working temperature maximum		+50°C
Weight with packaging		231 g
Product weight		191 g
ELECTRIC	AL DATA	
Operating voltage		24V
Operating voltage type		AC/DC
Operating voltage frequency		50Hz
Operating voltage tolerance		+/- 10%
Rated operational voltage		24 VDC
Rated operational current		160 mA
Rated inrush current		500 mA
Protection class		Protection class 2
Pollution degree		3 In the connection area: 2
OPTICAL	DATA	
Light source		LED
Light colour		Blue Green Red Yellow

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.


ļ

Completely pre-assembled Signal Towers / KOMPAKT 37 K37 cable EM Pulse tone 24VAC/DC BU/GN/Y

Optical signal image	Permanent	
Service life optical	50,000 h maximum	
ACOUSTIC DATA	•	
Volume (max) at 1m distance	85,0 dB (A)	
Acoustic signal image	Pulse tone	
Audio frequency	2900 Hz	
Acoustic service life	5,000 h minimum	
APPROVAL DATA		
Conforms with CE	Yes	
Conforms with RoHS directive	Yes	
WEEE	Yes	
Conforms with ATEX-directive	No	
Conforms with CCC	No	
Conforms with UL	cULus	
UL Type Rating	Туре 12 Туре 4Х	
Conforms with FCC	No	
Conforms with IC	No	
EAC certificate available	Yes	
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)	
Conforms with AS-I	No	
ICAO Certification	No	
Conforms with DNV	No	
Conforms with RoHS CN	No	
Conforms with VdS	No	

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Completely pre-assembled Signal Towers / KOMPAKT 37 K37 cable EM Pulse tone 24VAC/DC BU/GN/Y

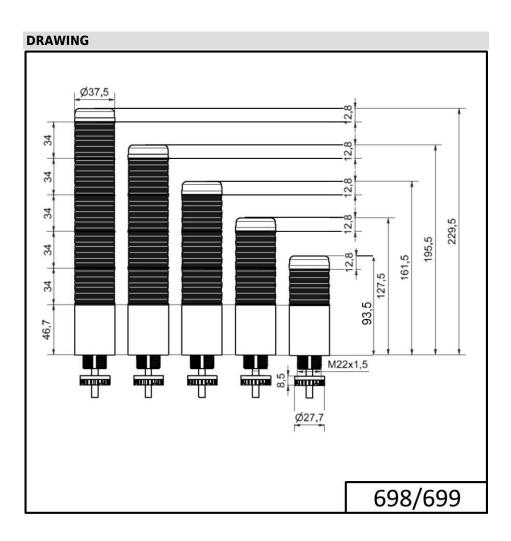

Pror additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.