




Pendant luminares
4051859986485
L 362, B 125, H 192

pendant
traffic white, matt (RAL 9016)

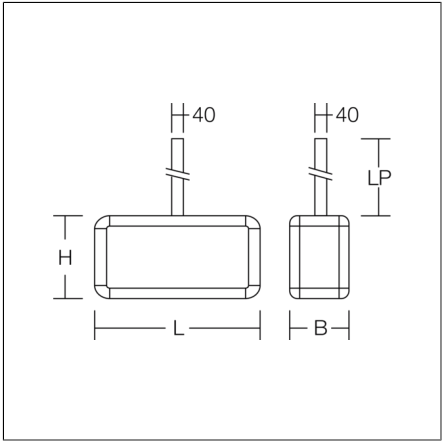

Rectangular pendant luminaire in classic design. For escape route identification. Housing: aluminium, with plastic corner connectors. Display panels: plastic, opal, with motifs on one side/on both sides. Aluminium pendant suspension. Driver integrated. Suitable for connection to central battery systems. Please indicate legend number when placing your order!

Product specifications

Type of emergency lighting	Central battery system
Monitoring	Power circuit
Battery	without
Operating mode	maintained power mode
Viewing Distance	32 m
Length L	362 mm
Width B	125 mm
Height H	192 mm
Suspension length LP	500 mm
Weight	2.98 kg
Light source	LED
Colour temperature	4000 K
System power, mains operation	4,2 W
System power, emergency operation	4,2 W
Colour rendering index (CRI)	70
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 0 Hz, 50 Hz
Luminares on B10A fuse	17
Luminares on B16A fuse	27
Luminares on C10A fuse	28
Luminares on C16A fuse	45
Inrush current / Inrush current duration	27 A / 250 µs
CIE Flux Code / CEN Flux Code	29 57 81 65 100
Type of protection	IP 44
Protection class	I
Filament test	650 °C
Impact resistance	IK03
Ambient temperature for maintained power	-10 °C ... + 40 °C
Ambient temperature for non-maintained power mode	-10 °C ... + 40 °C
Conformity mark	CE, EAC