



# Axyl Gild

# THORN

## 96701535 AXYL GILD L 1W 28L 930 UWB RD ANT

<b>LED</b> 9W AXYL_GILD_L_UWB930	IP65	IK06		
----------------------------------	------	------	---	---


### Axyl Gild

Axyl Gild, a wall mounted, architectural LED luminaire for decorative facade lighting, with Ultra wide beam distribution. Class III electrical.. DALI-2 dimmable Remote LED driver. , IP65, Impact strength: IK06. Housing: die-cast aluminium, powder coated textured anthracite. Working ambient temperature: -20°C to +50°C. Complete with 3000K LED..


Dimensions: 265 x 100 x 110 mm  
Luminaire input power: 8.7 W  
Luminaire luminous flux: 782 lm  
Luminaire efficacy: 90 lm/W  
Weight: 2.42 kg



TLG\_AXYL\_F\_GILD\_ANT.jpg

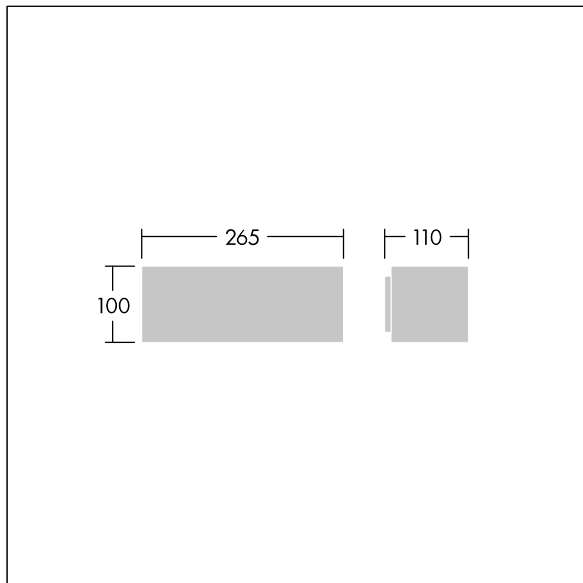

TLG\_AXYL\_M\_GILD\_L.wmf

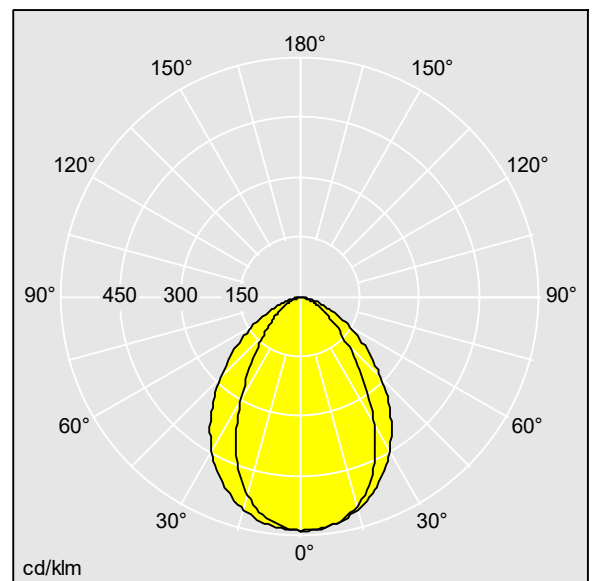

96701535.ltd

Lamp position: STD - standard  
Light Source: LED  
Luminaire luminous flux\*: 782 lm  
Luminaire efficacy\*: 90 lm/W  
Colour Rendering Index min.: 90  
Correlated colour temperature\*: 3000 Kelvin

Chromaticity tolerance (initial MacAdam): 3  
Rated useful life (B10)\*:  
L80 70000 h at 25 °C  
Ballast: 0x LED\_DRV  
Luminaire input power\*: 8.7 W Power factor = 0.86  
Dimming: Dali2Dim  
LOR: 1,00 ULOR: 0,00 DLOR: 1,00

This product contains a light source of energy efficiency class C.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting