


RING OF FIRE

311669.004.1.730 | Pendant luminaires



Pendant luminaires
4051859258315
D 495, H 55

pendant
anodised aluminium

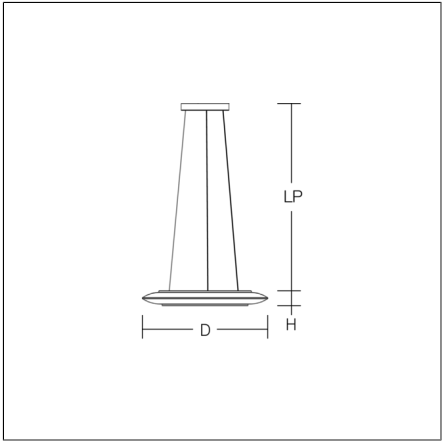

A uniquely shaped pendant luminaire with elliptical glass. Supporting ring made of anodised aluminium. Canopy aluminium anodised. Opal glass: mouth-blown, satin finish. Suitable for pendant. 3-point steel cable suspension, steplessly adjustable. Special lengths available on request. For pendant lengths of up to 2 m, power is supplied through a suspension cable. For pendant lengths of 2 m and more, power must be supplied through a separate cable. Converter integrated in the canopy. With Casambi smart+free Bluetooth® control for wireless network and operation using Android / iOS devices, free app available for download.

Product specifications

| | |
|--|----------------------------------|
| Diameter D | 495 mm |
| Height H | 55 mm |
| Suspension length LP | 500-1200 mm |
| Weight | 5.16 kg |
| Light source | LED |
| Colour temperature | 4000 K |
| Rated luminous flux | 2900 lm |
| System power | 28 W |
| System efficiency | 104 lm/W |
| Glare evaluation UGR (4H 8H) | 23 |
| Beam angle | down 115° up 119° |
| Rated life | 50000 h (L80/B50) |
| Colour rendering index (CRI) | 80 |
| Colour tolerance | 3 |
| Photobiological safety according to EN 62471 | Risk group 1 |
| Driver | Converter, dimmable |
| Control | smart+free (Bluetooth) |
| Voltage | 220 - 240 V / 0 Hz, 50 Hz, 60 Hz |
| Luminaires on B10A fuse | 12 |
| Luminaires on B16A fuse | 20 |
| Inrush current / Inrush current duration | 30 A / 200 µs |
| CIE Flux Code / CEN Flux Code | 43 72 90 56 100 |
| Type of protection | IP 20 |
| Protection class | I |
| Filament test | 960°C - 30 seconds |
| Impact resistance | IK02 |
| Ambient temperature | 25 °C |
| Conformity mark | CE, EAC |

Spareparts



05-1941.002
Replacement glass