

# Axyl Greet W

THORN


96701631 AXYL GREETW M DWN 28L 930 WB RD ANT

|                        |      |      |   |   |  |
|------------------------|------|------|---|---|--|
| LED 13W AXYL_GW_M_D930 | IP65 | IK06 |  |  |  |
|------------------------|------|------|---|---|--|


## Axyl Greet W

AXYL Greet W, a wall mounted, architectural LED luminaire for decorative facade lighting, with wide beam distribution. Class III electrical.. DALI-2 dimmable Remote LED driver. , IP65, Impact strength: IK06. Housing: die-cast aluminium, powder coated textured anthracite. Working ambient temperature: -20°C to +50°C. Complete with 3000K LED..


Dimensions: 220 x 80 x 33 mm  
Luminaire input power: 12.9 W  
Luminaire luminous flux: 535 lm  
Luminaire efficacy: 42 lm/W  
Weight: 0.87 kg

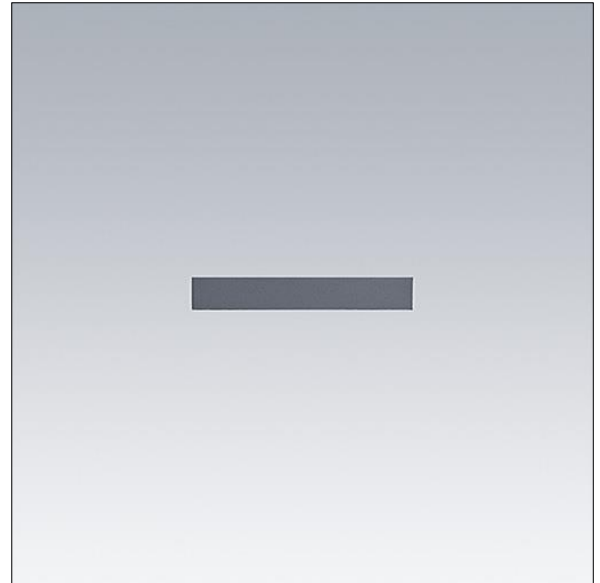

TLG\_AXYL\_F\_GREET\_W\_M\_ANT.jpg

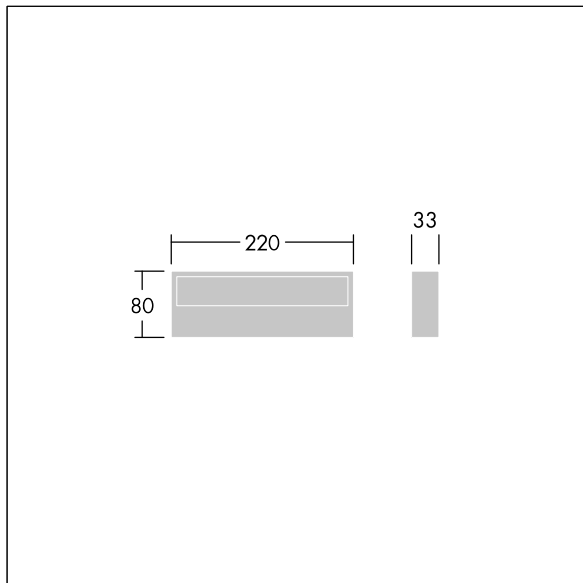

TLG\_AXYL\_M\_GREET\_W\_M.wmf

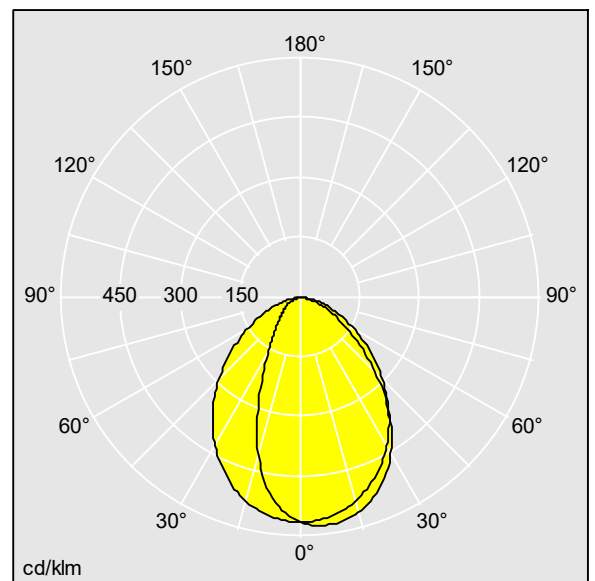

96701631.ltd

Lamp position: STD - standard  
Light Source: LED  
Luminaire luminous flux\*: 535 lm  
Luminaire efficacy\*: 42 lm/W  
Colour Rendering Index min.: 90  
Correlated colour temperature\*: 3000 Kelvin

Chromaticity tolerance (initial MacAdam): 3  
Rated useful life (B10)\*:  
L80 70000 h at 25 °C  
Ballast: 0x LED\_DRV  
Luminaire input power\*: 12.9 W Power factor = 0.79  
Dimming: Dali2Dim  
LOR: 1,00 ULOR: 0,00 DLOR: 1,00

This product contains a light source of energy efficiency class C.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting