




Recessed ceiling luminaires
4051859036364
L 420, B 55, H 202

Recessed ceiling mounting
silver, matt (approx. RAL 9006)

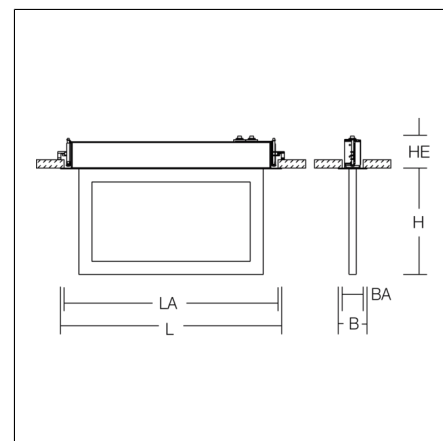

Luminaire for escape route identification. Housing: anodised aluminium, silver. Display panel: patented MicroLens technology and legend on both sides. Driver integrated. Suitable for connection to central battery systems. With AC Control monitoring module for LUXIFAIR central battery units. Please indicate legend number when placing your order!

Product specifications

Type of emergency lighting	Central battery system
Monitoring	Luxifair AC-Control
Battery	without
Operating mode	maintained power mode
Viewing Distance	30 m
Length L	420 mm
Width B	55 mm
Height H	202 mm
Cut-out length LA	400 mm
Cut-out width BA	40 mm
Installation space height HE	90 mm
Luminaire: recess height HEL	60 mm
Ceiling thickness S	5-35 mm
Weight	2.02 kg
Light source	LED
Colour temperature	5700 K
System power, mains operation	7,1 W
System power, emergency operation	7,1 W
Colour rendering index (CRI)	80
Colour tolerance	6
Photobiological safety according to EN 62471	Risk group 0
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 0 Hz, 50 - 60 Hz
Luminaires on B10A fuse	188
Luminaires on B16A fuse	301
Luminaires on C10A fuse	188
Luminaires on C16A fuse	301
Inrush current / Inrush current duration	12.2 A
Type of protection	IP 40 on room side IP 20
Protection class	I
Filament test	650°C - 30 seconds
Impact resistance	IK03
Ambient temperature for maintained power	0 °C ... + 25 °C
Ambient temperature for non-maintained power mode	5 °C ... + 40 °C
Conformity mark	CE