



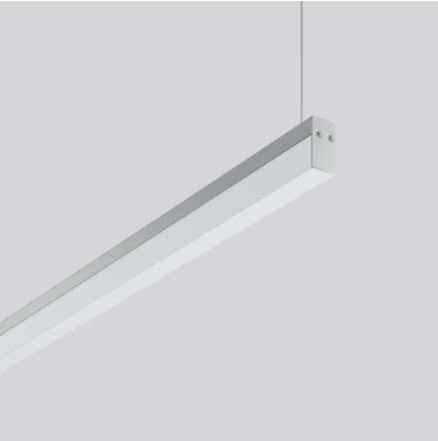

Pendant luminaires
4051859234814
L 1208, B 21, H 36

pendant mounting through suspended ceiling
anodised aluminium

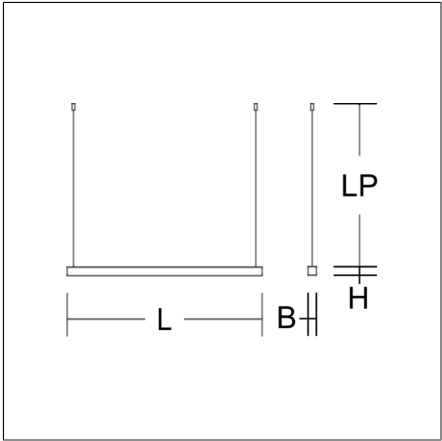

Minimalist pendant luminaire with light emission on three sides. Housing: extruded aluminium profile, anodised or powder-coated. End cap anodised aluminium or powder-coated. Diffuser made of non-yellowing plastic (PMMA), opal. Suitable for pendant mounting through suspended ceiling. 2-point steel cable suspension, steplessly adjustable. Special lengths available on request. External driver with connecting cable.

Product specifications

Length L	1208 mm
Width B	21 mm
Height H	36 mm
Suspension length LP	100-1500 mm
Weight	0.91 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux	2050 lm
System power	20 W
System efficiency	103 lm/W
Glare evaluation UGR (4H 8H)	25,4
Beam angle	down 180°/115° up 180°/180°
Rated life	60000 h (L80/B10)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	DALI
Voltage	220 - 240 V / 0 Hz, 50 - 60 Hz
Luminaires on B10A fuse	13
Luminaires on B16A fuse	21
Luminaires on C10A fuse	22
Luminaires on C16A fuse	36
Inrush current / Inrush current duration	41 A / 150 µs
CIE Flux Code / CEN Flux Code	33 62 84 72 100
Type of protection	IP 20
Protection class	II
Filament test	650°C - 30 seconds
Impact resistance	IK00
Ambient temperature	25 °C
Test marks	ENEC, VDE
Conformity mark	CE, EAC