


Signal Pro Emergency Downlight




- LiFePO4 Lithium battery provides enhanced product lifetime
- Supplied with open area and escape route interchangeable lenses
- High specification optic design and performance allows increased spacing providing reduced cost
- DALI emergency as standard
- 70mm to 120mm cut-out
- If not connected to DALI network Self-test mode operates automatically

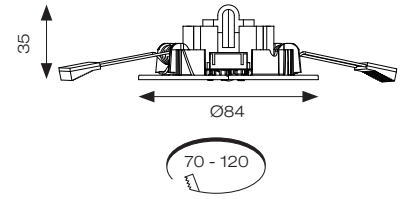

ASPRLED/LI/3M/DA
Open Area Lens




ASPRLED/LI/3M/DA
Escape Route Lens



Escape route 2 metres wide (1 Lux minimum) *				

Mounting Height (M)	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial
2.5	-	-	6	14
4	-	-	5.5	16
6	-	-	-	-

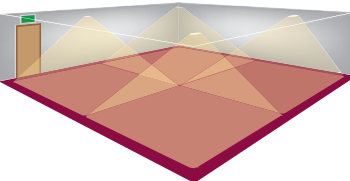

Open (Anti-Panic) area (0.5 Lux Minimum)**				

Mounting Height (M)	Transverse to Wall	Transverse to Transverse	Axial to Wall	Axial to Axial
2.5	4	8	4	8
4	4.7	9	4.7	9
6	4.9	9.5	4.9	9.5

INPUT	HERTZ	TEMP	LIFETIME (HRS)	BEAM ANGLE	CLASS	IP
220-240V	50Hz	5°C to 40°C	L80 36,000	Open area - 144° Escape route - 143°x120°	2	IP20

CODE	DESCRIPTION	WATTAGE	CCT	EMERGENCY MODE	TRADE
ASPRLED/LI/3M/DA	Non-Maintained	2.5W	6000K	Open area - 209lm Escape route - 201lm	£110.00

CODE (ACCESSORIES)	DESCRIPTION	TRADE
ASBP/19	6.4V 1500mAh LiFePO4 Lithium Replacement Battery	£22.65