

#### Completely pre-assembled Signal Towers / KOMPAKT 37

# K37cl sr plug EM Pulse tone 12VAC/DC GN/



| rt No.: | 699.420.74 | $C \in$ |   | c(UL)us          |  |
|---------|------------|---------|---|------------------|--|
| Series: | Kompakt 37 |         | 7 | c <b>QL</b> ) us |  |

| MECHANICAL DATA             |                     |  |  |
|-----------------------------|---------------------|--|--|
| Height                      | 141 mm              |  |  |
| Diameter                    | 38 mm               |  |  |
| Materials                   | PC                  |  |  |
| Dome colour                 | Clear               |  |  |
| Housing colour              | Black               |  |  |
| Protection category         | IP65                |  |  |
| Connection                  | M12 plug 5-pole     |  |  |
| Cable entry                 | Membrane grommet    |  |  |
| Cable entry minimum         | d = 1 mm            |  |  |
| Cable entry maximum         | d = 9 mm            |  |  |
| Cable length                | 150 mm              |  |  |
| Tension relief              | Pull-out protection |  |  |
| Type of fixing              | Built-in mounting   |  |  |
| Working temperature minimum | -20°C               |  |  |
| Working temperature maximum | +50°C               |  |  |
| Weight with packaging       | 63 g                |  |  |
| Product weight              | 63 g                |  |  |

| ELECTRICAL DATA             |                                |  |  |
|-----------------------------|--------------------------------|--|--|
| Operating voltage           | 12V                            |  |  |
| Operating voltage type      | AC/DC                          |  |  |
| Operating voltage frequency | 50Hz                           |  |  |
| Operating voltage tolerance | +/- 10%                        |  |  |
| Rated operational voltage   | 12 VDC                         |  |  |
| Rated operational current   | 195 mA                         |  |  |
| Rated inrush current        | 500 mA                         |  |  |
| Protection class            | Protection class 2             |  |  |
| Pollution degree            | 3<br>In the connection area: 2 |  |  |

| OPTICAL DATA         |                  |  |  |
|----------------------|------------------|--|--|
| Light source         | LED              |  |  |
| Light colour         | Green<br>Red     |  |  |
| Optical signal image | Permanent        |  |  |
| Service life optical | 50,000 h maximum |  |  |

| ACOUSTIC DATA               |             |  |  |  |
|-----------------------------|-------------|--|--|--|
| Volume (max) at 1m distance | 80,0 dB (A) |  |  |  |
| Acoustic signal image       | Pulse tone  |  |  |  |

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



#### Completely pre-assembled Signal Towers / KOMPAKT 37

## K37cl sr plug EM Pulse tone 12VAC/DC GN/


| 2900 Hz               |  |  |
|-----------------------|--|--|
| 5,000 h minimum       |  |  |
|                       |  |  |
| Yes                   |  |  |
| Yes                   |  |  |
| Yes                   |  |  |
| No                    |  |  |
| No                    |  |  |
| cULus                 |  |  |
| Type 12<br>Type 4X    |  |  |
| No                    |  |  |
| No                    |  |  |
| Yes                   |  |  |
| Yes (WERMA (UK) Ltd.) |  |  |
| No                    |  |  |
|                       |  |  |

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / KOMPAKT 37

### K37cl sr plug EM Pulse tone 12VAC/DC GN/

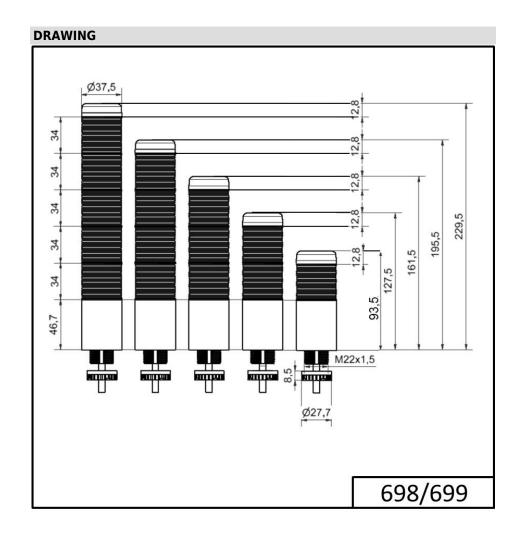

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.