

# LINEA 3 LED 1680MM 3600LM DALI LS2 7P 840 60D (25W)

DETAILED CARD



## TECHNICAL PARAMETERS

|                                    |           |
|------------------------------------|-----------|
| Ingress protection:                | IP40      |
| Impact resistance:                 | IK06      |
| Rated power of the luminaire [W]*: | 25        |
| Luminous flux [lm]*:               | 3600      |
| Colour temperature [K]:            | 4000      |
| SDCM:                              | ≤ 3       |
| Energy efficiency class:           | C         |
| Material of the body:              | aluminium |
| Colour of the body:                | grey      |
| Optics material:                   | PMMA      |

## CHARACTERISTICS

LINEA 3 LED is a system of suspended and surface-mounted NEXT-GEN lighting lines, which is a new generation of lamps dedicated to LED technology. An innovative connection system and through wiring allow quick connection of luminaires into a lighting line. The construction used allows for easy installation and connection of the power supply. The body, made from scratch, made of aluminum profile, provides the luminaire with strength and solidity, and the narrow side profile allows installation in hard-to-reach places. LEDs from reputable manufacturers integrated with redesigned brand new LED modules have an impact on very high luminous efficacy. This guarantees that the required lighting level is achieved and that significant energy savings are achieved. The optical system is made of UV-resistant PMMA. Thanks to the use of linear lenses it is possible to adapt to different lighting requirements - 3 distribution angles: 90, 60, 45.

## APPLICATION

Particularly well suited for indoor use. Dedicated as the primary light source for commercial facilities, manufacturing plants, and warehouses. It is appropriate for new applications as well as replacing conventional T8 & T5 fittings on energy-saving LED solutions.


# LINEA 3 LED 1680MM 3600LM DALI LS2 7P 840 60D (25W)

DETAILED CARD

## TECHNICAL PARAMETERS TABLE

|                                   |            |                            |                                                                             |
|-----------------------------------|------------|----------------------------|-----------------------------------------------------------------------------|
| Rated power of the luminaire [W]: | 25         | Through wiring:            | 7x2,5                                                                       |
| Index:                            | 974090     | Dimensions (H/W/T/S) [mm]: | 1680/47/52                                                                  |
| Colour temperature [K]:           | 4000       | Material of the body:      | aluminium                                                                   |
| Light source:                     | LED module | Colour of the body:        | grey                                                                        |
| Luminous flux [lm]:               | 3600       | Impact resistance:         | IK06                                                                        |
| Nominal power [W]:                | 24         | Ingress protection:        | IP40                                                                        |
| Supply voltage [V]:               | 220 - 240  | Glow wire test [°C]:       | 650                                                                         |
| Frequency [Hz]:                   | 50 - 60    | Mounting version:          | surface, suspended                                                          |
| Luminous efficacy [lm/W]:         | 144        | Net weight [kg]:           | 2.310                                                                       |
| Energy efficiency class:          | C          | Warranty [years]:          | 5                                                                           |
| Electrical protection class:      | I          | Category type:             | systems                                                                     |
| Colour rendering index:           | >80        | Category of application:   | industrial                                                                  |
| SDCM:                             | ≤ 3        | AC voltage range [V]:      | 198 - 264                                                                   |
| Optics:                           | 60         | DC voltage range [V]:      | 176 - 280                                                                   |
| LED lifespan L70B50 [h]:          | 117000     | Photobiological safety:    | Risk Group 1 (no photobiological hazard under normal behavioral limitation) |
| LED lifespan L80B20 [h]:          | 74000      | Warranty [years]:          | 5                                                                           |
| DIMM DALI:                        | yes        | CE certificate:            | <a href="#">169/2023</a>                                                    |
| LED lifespan L90B10 [h]:          | 36000      | Manual:                    | <a href="#">Download PDF</a>                                                |
| Optics material:                  | PMMA       | Plik LDT:                  | <a href="#">Download</a>                                                    |

## LIGHT CURVES

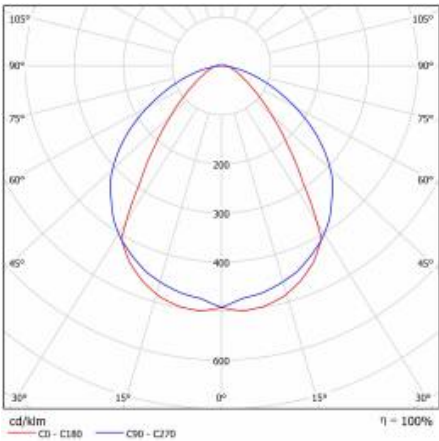

# LINEA 3 LED 1680MM 3600LM DALI LS2 7P 840 60D (25W)

---

DETAILED CARD

## TECHNICAL DETAILS

---



LINEA 3 LED

# LINEA 3 LED 1680MM 3600LM DALI LS2 7P 840 60D (25W)

DETAILED CARD

## ACCESSORIES AVAILABLE

| index  | Name                              |
|--------|-----------------------------------|
| 974601 | Linea 3 LED 1680mm - moduł LS2 5P |
| 974618 | Linea 3 LED 1680mm - moduł LS2 7P |
| 974625 | Linea 3 LED 3340mm - moduł LS2 5P |
| 974632 | Linea 3 LED 3340mm - moduł LS2 7P |
| 974649 | Linea 3 LED - closing set         |

Card creation date: 08 January 2025  
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 169/2023



Lena Lighting S.A.  
ul. Kórnicka 52, 63-000 Środa Wielkopolska  
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl