




Pendant luminaires  
4051859986003  
L 362, B 125, H 192

Suspension cable/chain  
anodised aluminium

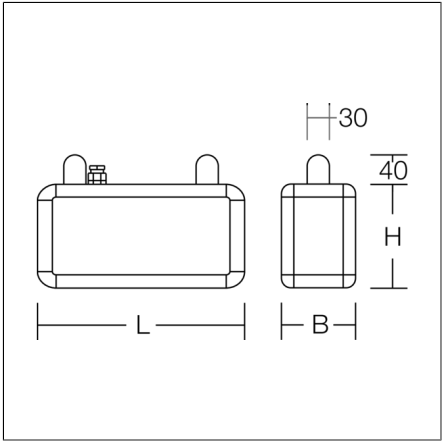

Rectangular pendant luminaire in classic design. For escape route identification. Housing: aluminium, with plastic corner connectors. Display panels: plastic, opal, with motifs on one side/on both sides. Pendant luminaires (suspension provided on site) ready for connection to two suspension cables or chains. Electronic ballast included. Self-contained system with automatic self-test. Please indicate legend number when placing your order!

Product specifications

|                                                   |                            |
|---------------------------------------------------|----------------------------|
| Typ of emergency lighting                         | Self-contained system      |
| Monitoring                                        | Autotest                   |
| Battery                                           | LiFePO4                    |
| Duration                                          | 1 h, 3 h, 8 h              |
| Operating mode                                    | maintained power mode      |
| Viewing Distance                                  | 32 m                       |
| Length L                                          | 362 mm                     |
| Width B                                           | 125 mm                     |
| Height H                                          | 192 mm                     |
| Weight                                            | 2.22 kg                    |
| Light source                                      | LED                        |
| Colour temperature                                | 4000 K                     |
| System power, mains operation                     | 4,6 W   undefined W        |
| Photobiological safety according to EN 62471      | Risk group 1               |
| Driver                                            | Converter                  |
| Control                                           | on/off                     |
| Voltage                                           | 220 - 240 V / 50 Hz, 60 Hz |
| CIE Flux Code / CEN Flux Code                     | 29 57 81 65 100            |
| Type of protection                                | IP 44                      |
| Protection class                                  | I                          |
| Filament test                                     | 650 °C                     |
| Impact resistance                                 | IK03                       |
| Ambient temperature for maintained power          | 0 °C ... + 25 °C           |
| Ambient temperature for non-maintained power mode | 5 °C ... + 40 °C           |
| Conformity mark                                   | CE                         |