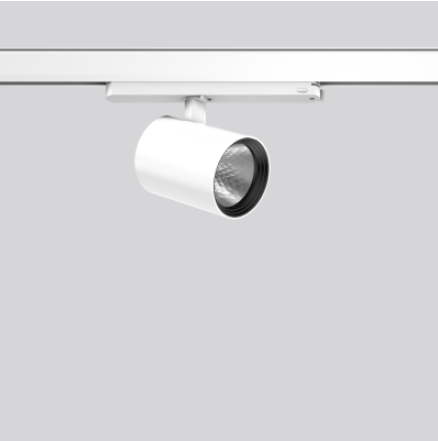


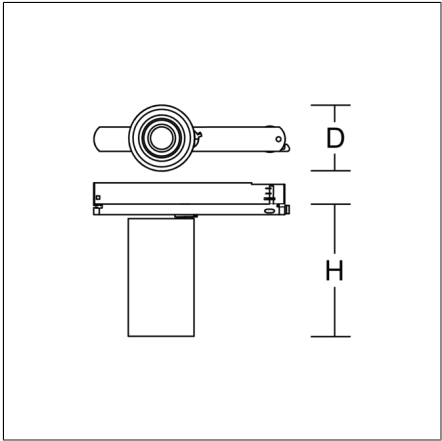
DEECOS S mini track-in

742250.002.2.730 | Surface mounted projector



Surface mounted projectors
4051859811398
D 87, H 135

Track on ceiling, Wall track
traffic white, matt (RAL 9016)



LED surface-mounted projector in modern design with no visible cooling ribs. Housing: die-cast aluminium, powder-coated. Rotation range: 356°. Swivel range: 90°. Black plastic ring and recessed LED to prevent glare from the side. Optical assembly with reflector made of MIRO-Silver with 98% total light reflection for outstanding efficiency - can be changed without tools. Best colour rendering index Ra>90. With multi adaptor for 3-circuit tracks 230 V. Suitable for Track on ceiling, Wall track. Track-in driver integrated into the adaptor. High quality converter without flickering and stroboscopic effect. With Casambi smart+free Bluetooth® control for wireless network and operation using Android / iOS devices, free app available for download. The following accessories can be mounted without use of tools: interchangeable lenses, decorative glasses, honeycomb louvre, clear and frosted diffusers, white interchangeable plastic ring.

Product specifications






Diameter D	87 mm
Height H	135 mm
Weight	0.62 kg
Light source	LED
Colour temperature	2700 K
Rated luminous flux	2400 lm
System power	20 W
System efficiency	120 lm/W
Glare evaluation UGR (4H 8H)	13,8
Beam angle	18°
Rated life	50000 h (L90/B10)
Colour rendering index (CRI)	92
Colour tolerance	2
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	smart+free (Bluetooth)
Voltage	220 - 240 V / 50 - 60 Hz
Luminaire on B10A fuse	17
Luminaire on B16A fuse	27
Luminaire on C10A fuse	28
Luminaire on C16A fuse	44
Inrush current / Inrush current duration	18 A / 2 µs
CIE Flux Code / CEN Flux Code	100 100 100 100 100
Type of protection	IP 20
Protection class	II
Filament test	650°C - 30 seconds
Impact resistance	IK06
Ambient temperature	25 °C
Conformity mark	CE, EAC

DEECOS S mini track-in

742250.002.2.730 | Surface mounted projector



Accessories

	982370.000 Diffuser, transparent		982370.010 Diffuser, satinated
	982371.003 Anti-glare honeycomb louvre		982369.003 Spot lens
	982369.013 Medium lens		982369.023 Flood lens
	982421.002 White plastic ring for lens.		982368.003 Reflector spot
	982368.013 Reflector medium		982368.023 Reflector flood
	982369.033 Wide flood lens		982369.043 Oval corridor lens
	982419.002 White plastic ring for reflector.		982368.033 Reflector wide flood
	982647.002 Decorative glass opal matt		982648.002 Decorative glass opal matt