


ALU-SUPERIOR

51052.004 | Ceiling and wall luminaires



Ceiling and wall luminaires
4051859133742
D 245, H 125

Ceiling mounting, Wall (surface)
silver, matt (approx. RAL 9006)

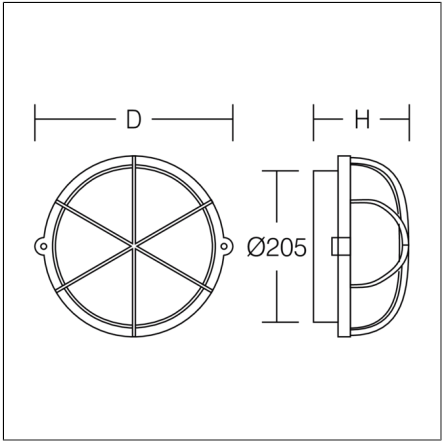

Robust ceiling and wall luminaire for outdoor use. Base and protective guard: die-cast aluminium, powder-coated. With membrane valve to avoid condensation. Diffuser: plastic (polycarbonate), opal. Stainless steel mounting bracket with compensation for drill hole deviations. Mains connection 2 x 3 x 1.5 mm². Replaceable LED module.

Product specifications

Diameter D	245 mm
Height H	125 mm
Weight	1.61 kg
Light source	1 x QA60 (clear) max. 57 W, E27
Rated luminous flux	450 lm
System power	57 W
System efficiency	8 lm/W
Glare evaluation UGR (4H 8H)	17
Beam angle	down 134° up 180°
Driver	Not necessary
Control	on/off
Voltage	230 V / 50 Hz
CIE Flux Code / CEN Flux Code	38 66 87 88 49
Type of protection	IP 65
Protection class	I
Filament test	850 °C
Impact resistance	IK08
Ambient temperature	0 °C ... + 25 °C
Conformity mark	CE, EAC

Spareparts



08-1837.002
Replacement diffuser