


# RONDOS mini

911621.004.3 | Recessed projectors



Recessed projectors  
4051859846482  
D 143, H 3

Recessed ceiling mounting  
silver

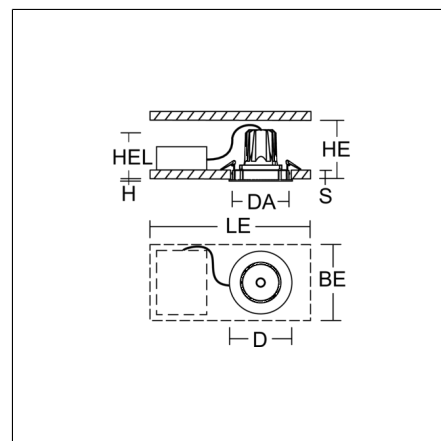

LED recessed projector in a modern design with no visible cooling ribs. Housing: die-cast aluminium, powder-coated. Rotation range: 356°; swivel range:  $\pm 35^\circ$ . Black plastic ring and recessed LED to prevent glare from the side. Optical assembly with reflector made of MIRO-Silver with 98% total light reflection for outstanding efficiency - can be changed without tools. Best colour rendering index  $R_a > 90$ . Suitable for Recessed ceiling mounting. Installation without tools thanks to spring fastening system. Including separate LED converter with connecting cable 600 mm. High quality converter without flickering and stroboscopic effect. Through-wiring box (5 pole) available as accessory. The following accessories can be mounted without use of tools: interchangeable lenses, decorative glasses, honeycomb louvre, clear and frosted diffusers, white interchangeable plastic ring.

# RONDOS mini


## 911621.004.3 | Recessed projectors



### Product specifications

Diameter D	143 mm
Height H	3 mm
Cut-out diameter DA	133 mm
Luminaire: recess height HEL	120 mm
Ceiling thickness S	1-20 mm
Installation space length LE	550 mm
Installation space width BE	350 mm
Installation space height HE	170 mm
Weight	0.76 kg
Light source	LED
Colour temperature	3500 K
Rated luminous flux	2650 lm
System power	20 W
System efficiency	133 lm/W
Glare evaluation UGR (4H 8H)	20,8
Beam angle	60°
Rated life	50000 h (L90/B10)
Colour rendering index (CRI)	92
Colour tolerance	2
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	21
Luminaires on B16A fuse	34
Luminaires on C10A fuse	35
Luminaires on C16A fuse	57
Inrush current / Inrush current duration	9.92 A / 230 µs
CIE Flux Code / CEN Flux Code	95 99 100 100 100
Type of protection	IP 20
Protection class	II
Filament test	650 °C
Impact resistance	IK06
Ambient temperature	-20 °C ... + 25 °C
Safety marks	Do not cover the recessed luminaire!
Conformity mark	CE, EAC


### Accessories




982370.000  
Diffuser, transparent




982370.010  
Diffuser, satinated




982371.003  
Anti-glare honeycomb louvre



982369.003  
Spot lens



982369.013  
Medium lens



982369.023  
Flood lens



982421.002  
White plastic ring for lens.




982368.003  
Reflector spot

# RONDOS mini

## 911621.004.3 | Recessed projectors



982368.013  
Reflector medium



982369.033  
Wide flood lens




982419.002  
White plastic ring for reflector.



982703.002  
Through-wiring box



982368.023  
Reflector flood



982369.043  
Oval corridor lens



982368.033  
Reflector wide flood