


Axyl Gild

THORN

96700435 AXYL GILD S 2W 1L 830 WWB HF ANT

LED 6W AXYL_GILD_S_WWB830	IP65	IK06		CE
---------------------------	------	------	-----------------------------------------------------------------------------------	----


Axyl Gild

Axyl Gild, a wall mounted, architectural LED luminaire for decorative facade lighting, 2 window with wide beam up and down distribution. Class II electrical.. Fixed output LED driver. , IP65, Impact strength: IK06. Housing: die-cast aluminium, powder coated textured anthracite. Working ambient temperature: -20°C to +45°C. Complete with 3000K LED..


Dimensions: 120 x 120 x 140 mm
 Luminaire input power: 5.5 W
 Luminaire luminous flux: 76 lm
 Luminaire efficacy: 14 lm/W
 Weight: 1.62 kg



TLG_AXYL_F_GILD_ANT.jpg

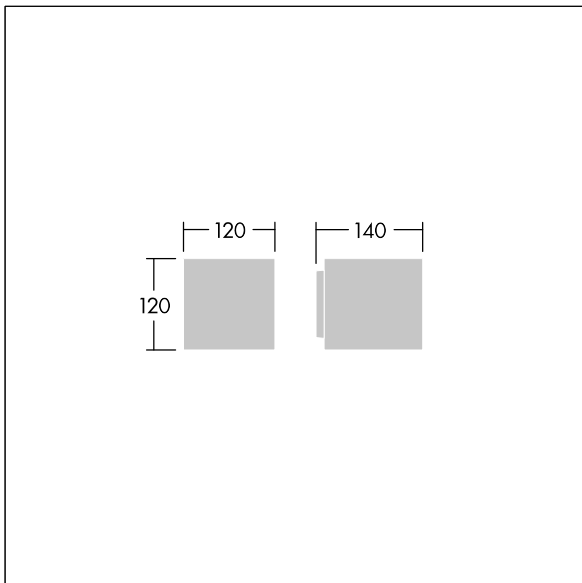

TLG_AXYL_M_GILD_S.wmf

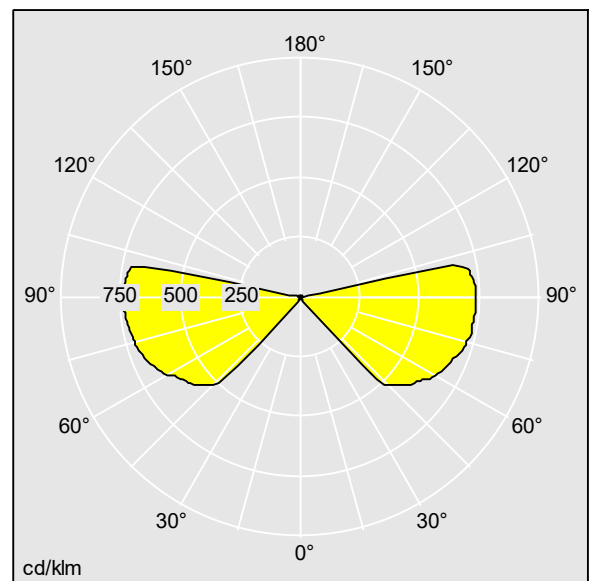

96700435.ltd

Lamp position: STD - standard
 Light Source: LED
 Luminaire luminous flux*: 76 lm
 Luminaire efficacy*: 14 lm/W
 Colour Rendering Index min.: 80
 Correlated colour temperature*: 3000 Kelvin

Chromaticity tolerance (initial MacAdam): 3
 Rated useful life (B10)*:
 L80 70000 h at 25 °C
 Ballast: 1x LED_DRV
 Luminaire input power*: 5.5 W Power factor = 0.58
 Dimming: FIX
 LOR: 1,00 ULOR: 0,25 DLOR: 0,75

This product contains a light source of energy efficiency class F.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
 © Thorn Lighting