


# SIGNCUBE IP54

672338.004.04 | Luminaires for escape route identification



Ceiling luminaires  
4051859371892  
L 351, B 351, H 236

Ceiling mounting  
anodised aluminium

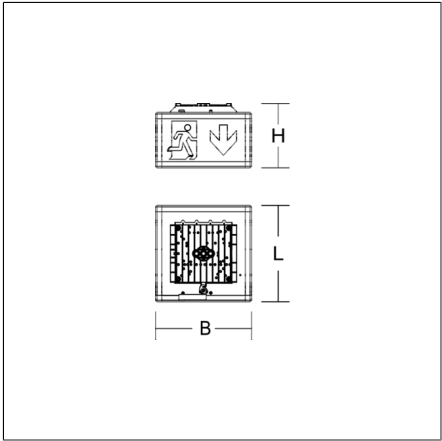

Luminaire for escape route identification. Base: plastic. Frame profile: aluminium anodised. Display panels: plastic, opal, with motifs on three sides. Light emission: downwards. Easy installation by folding mechanism. Electronic ballast included. Self-contained system with automatic self-test and feedback to the RZB monitoring system MULTIDIGIT.

### Product specifications

Type of emergency lighting	Self-contained system
Monitoring	MultiDigit
Battery	LiFePO4
Duration	3 h
Operating mode	maintained power mode
Viewing Distance	30 m
Length L	351 mm
Width B	351 mm
Height H	236 mm
Weight	3.4 kg
Light source	LED
Colour temperature	6500 K
System power, mains operation	10 W
Rated life	50000 h
Colour rendering index (CRI)	70
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 - 60 Hz
Inrush current / Inrush current duration	7 A / 350 µs
Type of protection	IP 54
Protection class	I
Filament test	650°C - 30 seconds
Impact resistance	IK04
Ambient temperature for maintained power	5 °C ... + 35 °C
Ambient temperature for non-maintained power mode	5 °C ... + 35 °C
Conformity mark	CE