

# Product End of Life Instructions

**ATV340 7.5kW 3PH 400V**

**ATV340 – 0.75kW - 1.1kW - 1.5kW - 2.2kW - 3kW - 4kW - 5.5kW - 7.5kW 3PH 400V**



**Schneider**  
Electric

## Potential disassembly risks




**ELECTRIC SHOCK,  
EXPLOSION,  
OR ARC FLASH.**

To service, remove all power.  
- Wait 15 minutes  
- Verify no voltage is present.

**Failure to comply  
will result in death  
or serious injury**

## End of Life Instructions

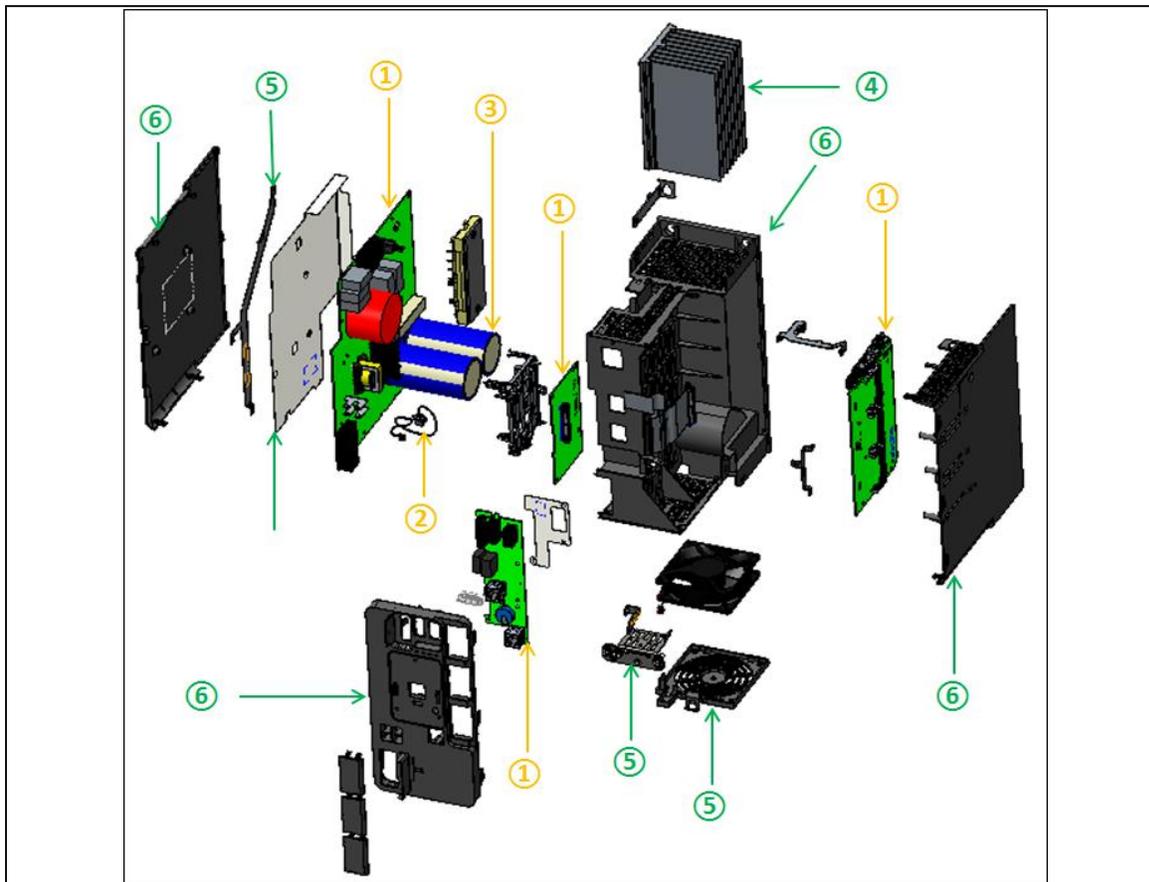

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted	①	Electronic Board (Power) > 10cm <sup>2</sup>	1174,2	PCBA
To be depolluted	②	Cable (high current)	19,3	
To be depolluted	③	Electrolyte capacitors which size: height > 25 mm, diameter > 25 mm or proportionately similar volume	394,4	Electrolyte capacitors
To be dismantled	④	Aluminium	531,8	Heatsink
To be dismantled	⑤	Steel	49	
To be dismantled	⑥	PC FR	688,7	Housing and cover



## Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	Schneider Electric
Product function	The main function of ATV340 is the speed control and torque of a three phase motors (Asynchronous and Permanent Magnet motors) in energy management for machines application.
Product reference	ATV340U75N4
Additional similar product references	ATV340U75N4 ATV340U55N4 ATV340U40N4 ATV340U30N4 ATV340U22N4 ATV340U15N4 ATV340U07N4 ATV340U75N4E ATV340U55N4E ATV340U40N4E ATV340U30N4E
Total representative product mass	2991.1 g
Representative product dimensions	270mm x 110mm x 234mm
Accessories	No
Date of information release	09/2016



## Additional information

Legal information	This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.	
In case of special transportation: transportation method	2991.1 g	
Recyclability potential	<b>50%</b>	Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

*Schneider Electric Industries SAS*

*Customer Care Center*

*[www.schneider-electric.com/contact](http://www.schneider-electric.com/contact)*

*35, rue Joseph Monier*

*CS 30323*

*F- 92506 Rueil Malmaison Cedex*

*RCS Nanterre 954 503 439*

*Capital social 896 313 776 €*

[www.schneider-electric.com](http://www.schneider-electric.com)

ENVEOLI1609005

Published by Schneider Electric

© 2016 - Schneider Electric – All rights reserved

09/2016