


Wall luminaires  
4051859700692  
L 100, B 154, H 131

Wall (surface)  
anthracite metallic (DB703)

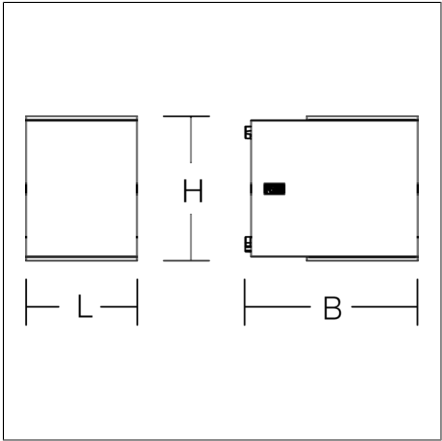

Wallsclaping: elegant and innovative wall luminaire for accent lighting. Housing made of corrosion-resistant die-cast aluminium, seawater resistant powder-coated. With membrane valve as a standard to avoid condensed water. Cover made of ceramic-coated toughened glass with bayonet lock. Light emission upwards and downwards, wide flood/wide flood. Fixing on the wall outside the sealed volume, drill hole deviations can be compensated. Screwless luminaire fixing via RZB Gravalock® System.

Product specifications

Length L	100 mm
Width B	154 mm
Height H	131 mm
Weight	1.77 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux	220 lm
System power	6.2 W
System efficiency	35 lm/W
Glare evaluation UGR (4H 8H)	11,7
Beam angle	down 47°/46° up 47°/46°
Rated life	50000 h (L70)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 2
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	39
Luminaires on B16A fuse	63
Luminaires on C10A fuse	39
Luminaires on C16A fuse	63
Inrush current / Inrush current duration	30 A / 30 µs
CIE Flux Code / CEN Flux Code	87 97 99 50 100
Type of protection	IP 65
Protection class	I
Filament test	960 °C
Impact resistance	IK07
Ambient temperature	-20 °C ... + 40 °C
Conformity mark	CE, EAC

## Accessories



982769.003  
Safety glass. Blanking cover.



982769.023  
Safety glass. Centre: satin finish d64 mm.



982769.043  
Safety glass. Centre: transparent 45x45 mm.



982769.013  
Safety glass. Centre: transparent d64 mm.



982769.033  
Safety glass. Centre: transparent with pressed glass lens Superspot.

## Spareparts



982769.043  
Safety glass. Centre: transparent 45x45 mm.