


Branch socket

P 71 GVD 2xM25

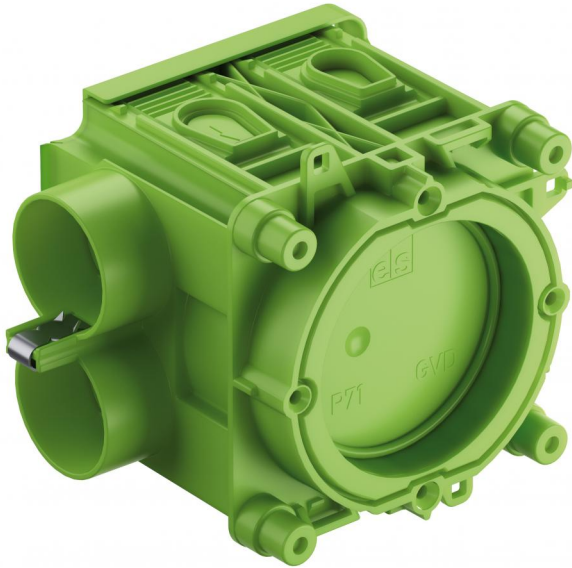

P 71 GVD 2xM25

Branch socket

Productnumber: 98406601

Dimensions: 71 x 71 x 67,5 mm

Branch socket, with protection class IP30, Rated insulation voltage: 400V AC, certified according to VDE (DIN EN 60670-1/-22 (VDE 0606-1/-22)), Halogen free

magnet installation, conduit adapter and additional conduit adapter with Easy-Cut-Membran, Sealing area M16 - M25, support spar compatible



Technical Data

electrical characteristics

Rated insulation voltage AC:	400 V
Protection class:	II
Type of protection:	IP30
Suitable for:	Concrete construction
UL Type Rating:	not specified

Colours

Base unit colour:	green
Cover colour:	green

Dimensions

Width:	71 mm
Length:	71 mm
Height:	67.5 mm
Diameter:	60 mm

Material characteristics

Industry quality:	no
Halogen free:	yes
Flammability class according with UL94:	HB
Glow-wire flammability according to EN 60695-2-11:	650 °C

mechanical properties

Type of fastening:	magnet installation
--------------------	---------------------

Material

Base unit material:	Polypropylene
Cover material:	Polypropylene

Certificates

Test mark:	VDE (DIN EN 60670-1/-22 (VDE 0606-1/-22))
------------	---

Accessories

[98401601 - RA 16 - Conduit adapter](#)

[98402001 - RA 20 - Conduit adapter](#)

[98402501 - RA 25 - Conduit adapter](#)

Cable gland

Integrierte Rohreinführung:

2 x M25

EasyCut-Membrane:

4 x bis M25