


GSUN 5

652533.002 | Stand-by luminaires for escape route illumination



Ceiling and wall luminaires
4051859723370
L 336, B 56, H 75

Ceiling mounting, Suspension cable/chain,
Wall (surface)
white

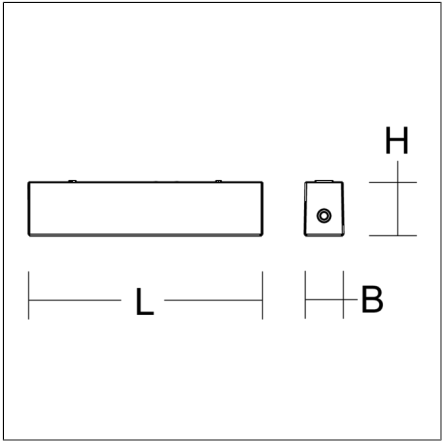

Rectangular surface-mounted luminaire in classic design. For escape route illumination. Housing: shockproof plastic (polycarbonate). Lens, plastic, for ideal light distribution on escape route. Suitable for Ceiling mounting, Suspension cable/chain, Wall (surface). Large cable entry space. Suitable for through-wiring. Electronic ballast included. Self-contained system with automatic self-test. Suspension set as accessory.

Product specifications

Type of emergency lighting	Self-contained system
Monitoring	Autotest
Battery	NiMh
Duration	1 h, 3 h, 8 h
Operating mode	non-maintained power mode
Length L	336 mm
Width B	56 mm
Height H	75 mm
Weight	1.2 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux, mains operation	660 lm
System power, mains operation	6,8 W
Rated luminous flux, emergency operation	1 h: 660 lm 3 h: 530 lm 8 h: 200 lm
System efficiency	97 lm/W
Glare evaluation UGR (4H 8H)	27,6
Beam angle	130°/100°
Colour rendering index (CRI)	80
Photobiological safety according to EN 62471	Risk group 1
Driver	Electronic ballast
Control	on/off
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	30
Luminaires on B16A fuse	40
Luminaires on C10A fuse	30
Luminaires on C16A fuse	40
CIE Flux Code / CEN Flux Code	42 77 96 100 100
Type of protection	IP 54
Protection class	II
Filament test	850°C - 30 seconds
Impact resistance	IK06
Ambient temperature for maintained power	0 °C ... + 40 °C
Ambient temperature for non-maintained power mode	5 °C ... + 40 °C
Safety marks	D-mark
Conformity mark	CE

GSUN 5

652533.002 | Stand-by luminaires for escape route illumination



Accessories



982763.000
Suspension cable set