



# MASTER GLASS LED candles and lusters

## MAS LEDLusterDT3.4-40W E14 927 P45CL G

Featuring a classic heritage design, Classic filament LED Lamps combine the familiar shapes of incandescent candles and lusters with the benefits of the long-lasting LED technology. It is an idea product to provide customers with cozy atmosphere. The MASTER LED candles and lusters can be dimmed for different lumen level and also for the different color temperature. MASTER Glass Led Bulbs deliver significant energy savings, offering even 30% more compared to normal LED and provides excellent quality of light. By offering a lifetime of 25,000 hours it reduces maintenance costs.

### Product data


General Information		Photobiological safety according to EN 62471 RGO	
Cap-Base	E14		
Nominal lifetime	25,000 hour(s)	Operating and Electrical	
Switching Cycle	20,000	Line Frequency	50 to 60 Hz
Lighting Technology	LED	Input Frequency	50 to 60 Hz
Flux measurement reference	Sphere	Power Consumption	3.4 W
Light Technical		Lamp Current (Nom)	24 mA
Color Code	922-927 [CCT of 2200K-2700K]	Wattage Equivalent	40 W
Luminous Flux	470 lm	Starting Time (Nom)	0.5 s
Color Designation	Warm Glow(WG)	Warm-up time to 60% light	0.5 s
Correlated Color Temperature (Nom)	2200 2700 K	Power Factor (Fraction)	0.6
Luminous Efficacy (rated) (Nom)	138 lm/W	Voltage (Nom)	220-240 V
Color Consistency	<6	Temperature	
Color rendering index (CRI)	90	T-Case Maximum (Nom)	70 °C
LLMF At End Of Nominal Lifetime (Nom)	70 %		

# MASTER GLASS LED candles and lusters

Controls and Dimming	
Dimmable	Only with specific dimmers
Mechanical and Housing	
Bulb Finish	Clear
Bulb Material	Glass
Bulb Shape	P45
Net Weight (Piece)	0.014 kg
Approval and Application	
Energy Efficiency Class	D
Energy Consumption kWh/1000 h	4 kWh
EPREL Registration Number	1109144
CE mark	Yes
EU RoHS compliant	Yes
EyeComfort	Yes
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	0.9
Stroboscopic effect visibility measure (SVM)	0.4


Ambient temperature range	-20 °C to 45 °C
Application Conditions	
can it be used in closed luminaires	No
Product Data	
Order product name	MAS LEDLusterDT3.4-40W E14 927 P45CL G
Full product name	MAS LEDLusterDT3.4-40W E14 927 P45CL G
Full product code	871951444951000
Order code	929003013182
Material Nr. (12NC)	929003013182
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8719514449510
Numerator - Packs per outer box	10
EAN/UPC - Case	8719514449527

## Dimensional drawing




Product	D	C
MAS LEDLusterDT3.4-40W E14 927 P45CL G	45 mm	80 mm

## Photometric data

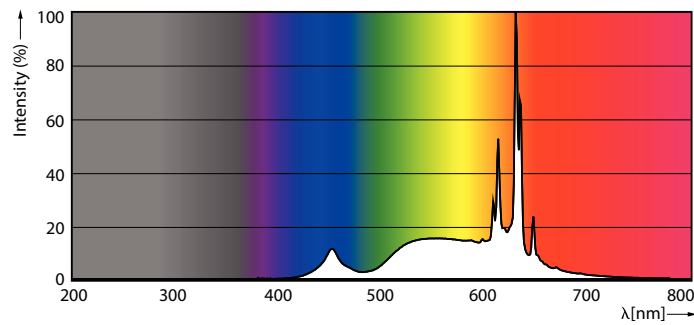


Spectral Power Distribution Colour - MAS LEDLusterDT3.4-40W E14 927 P45CL G



Light Distribution Diagram - MAS LEDLusterDT3.4-40W E14 927 P45CL G

# MASTER GLASS LED candles and lusters

## Photometric data




General uniform lighting - MAS LEDLusterDT3.4-40W E14 927 P45CL G

General uniform lighting - MAS LEDLusterDT3.4-40W E14 927 P45CL G

## Lifetime



Life Expectancy Diagram

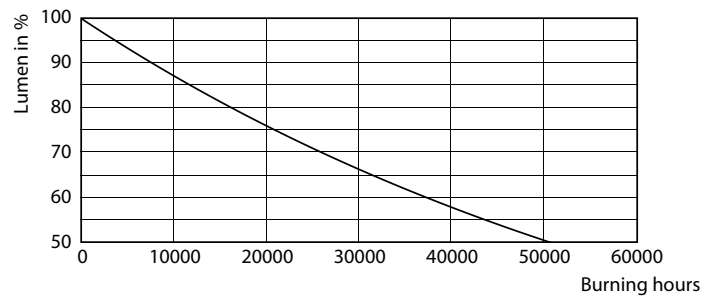

Lumen Maintenance Diagram - MAS LEDLusterDT3.4-40W E14 927 P45CL G

