



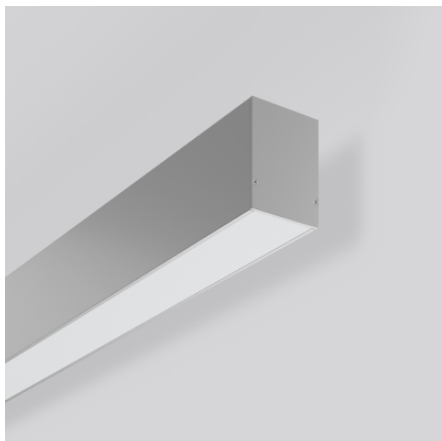

Wall luminaires
4068754009447
L 1127, B 67, H 75

Wall (surface)
silver, matt (approx. RAL 9006)

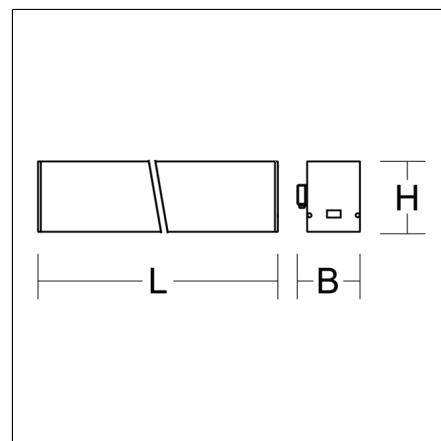

Linear wall luminaires. Housing: extruded aluminium profile, powder-coated. End cap aluminium powder-coated. Diffuser made of non-yellowing plastic (PMMA), opal. Direct 50%, indirect 50% light emission. Suitable for Wall (surface). LED unit with integrated converter interchangeable and removable. Suitable for through-wiring. With sensors or as a safety luminaire on request.

Product specifications

Length L	1127 mm
Width B	67 mm
Height H	75 mm
Weight	3.32 kg
Light source	LED
Colour temperature	#3000 K #3000 K
Rated luminous flux	2600 lm
System power	20 W
System efficiency	130 lm/W
Glare evaluation UGR (4H 8H)	19,3
Beam angle	down 107°/108° up 108°/107°
Rated life	70000 h (L80/B10)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	DALI
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	10
Luminaires on B16A fuse	17
Luminaires on C10A fuse	18
Luminaires on C16A fuse	29
Inrush current / Inrush current duration	49 A / 140 µs
CIE Flux Code / CEN Flux Code	48 80 96 50 100
Type of protection	IP 20
Protection class	I
Filament test	650 °C
Impact resistance	IK03
Ambient temperature	5 °C ... + 35 °C
Conformity mark	CE