


BEAMLINE SLIM

742171.004.1.76 | Surface mounted projector



Surface mounted projectors
4051859744962
L 285, B 35, H 80

Track on ceiling, Wall track
silver

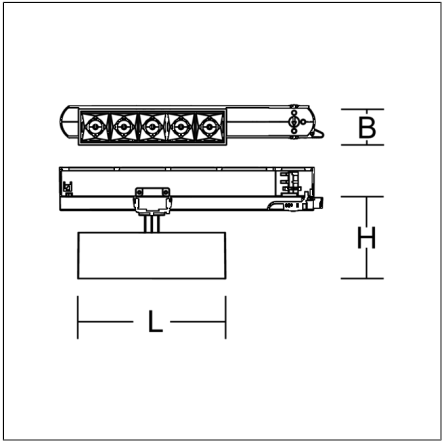

Linear surface mounted projector for aesthetically sophisticated lighting. Housing: metal, powder-coated. Perfect heat management with an aluminium heat sink. Rotation range: 356°. Swivel range: 90°. LED light unit with MRS technology: Mini-Reflector-System made of metallised thermoplastic with prismatic black glare-suppressing frame for pleasant glare-free light (UGR < 10). Medium beam light distribution.. With adapter for RZB 3-circuit DALI tracks. Suitable for Track on ceiling, Wall track. Converter integrated in the adapter.

Product specifications

| | |
|--|--------------------------|
| Length L | 285 mm |
| Width B | 35 mm |
| Height H | 80 mm |
| Weight | 0.565 kg |
| Light source | LED |
| Colour temperature | 3000 K |
| Rated luminous flux | 2050 lm |
| System power | 25 W |
| System efficiency | 82 lm/W |
| Glare evaluation UGR (4H 8H) | 5,4 |
| Beam angle | 28° |
| Rated life | 50000 h (L80/B10) |
| Colour rendering index (CRI) | 90 |
| Colour tolerance | 3 |
| Photobiological safety according to EN 62471 | Risk group 1 |
| Driver | Converter, dimmable |
| Control | DALI |
| Voltage | 220 - 240 V / 50 - 60 Hz |
| Luminaires on B16A fuse | 27 |
| Luminaires on C16A fuse | 44 |
| Inrush current / Inrush current duration | 18 A / 2 µs |
| CIE Flux Code / CEN Flux Code | 100 100 100 100 100 |
| Type of protection | IP 20 |
| Protection class | II |
| Impact resistance | IK06 |
| Ambient temperature | 25 °C |
| Conformity mark | CE, EAC |