



Unica System +

Flexibility in office and at home

www.se.com

Life Is On

Schneider
Electric







General content

- 3 [Desk unit XS](#)
- 4 [Cable Management](#)
- 5 [Floor sockets](#)
- 6 [Floor boxes](#)
- 9 [Modular units](#)
- 14 [Desk unit M](#)
- 15 [Desk unit L](#)
- 16 [Poles](#)
- 19 [Posts](#)
- 22 [Switch to smart design](#)
- 24 [Sockets with screw terminals](#)
- 27 [Simply efficient install](#)
- 29 [Unica System+](#)
- 30 [Inserts](#)

Wiring devices

Unica System+ Desk unit XS Range

Desk Unit XS

Type	Colour	Material	Dimensions A/B/C (mm)	Qty per package	Ref. No.	
Desk Unit XS						
Desk Unit to be flush mounted into a Ø 60 mm diameter hole in the desk. Available in different combinations of power, USB, or power and USB. Prewired unit with 2 meters cable and plug for direct connection to power. Comes with a locking ring for safe mounting in the desk. Easy and ergonomic access at arm length.						
	Desk Unit XS with DE std socket outlet	White	PC	Ø 84/63	1	INS44000
		Anthracite	PC	Ø 84/63	1	INS44001
	Desk Unit XS with DE std socket outlet and USB type A	White	PC	Ø 84/63	1	INS44004
		Anthracite	PC	Ø 84/63	1	INS44005
	Desk Unit XS with USB type A and USB type C	White	PC	Ø 84/63	1	INS44008
		Anthracite	PC	Ø 84/63	1	INS44009
Transparent lid						
Transparent lid as accessory for Desk Unit XS equipped with power socket outlet and/or USB socket outlet. Serves as socket outlet protection against dust and liquids. The desk Unit XS and transparent lid reaches protection degree IP42. Visibility and intuitive use due to transparency.						
	Transparent lid	Transparent	Transparent PC	Ø 84/7	1	INS44031
Desk Unit XS						
Desk Unit XS for wireless charging to be flush mounted into a Ø 60 mm diameter hole in the desk. Unit with 2 meter cable and USB type A for direct connection to socket USB 3.0 or power charger. The wireless charger has protection degree IP44 and is Qi certified. Input USB DC 5 V/2 A. Comes with a locking ring for safe mounting in the desk. Easy and ergonomic access at arm length.						
	Desk Unit XS for wireless charging	Anthracite	PC	Ø 84/63	1	INS44010
Holesaw						
Holesaw to drill a Ø 60 mm diameter hole in the desk. Suitable to prepare for mounting of Desk Unit XS and cable grommet.						
	Holesaw Ø 60 mm diameter	Black	Metal	Ø 60/114	1	INS44030

Cable Management

Type	Colour	Material	Dimensions A/B/C (mm)	Qty per package	Ref. No.
Floor cable					
A cable guiding feeder on the floor. A flexible solution, solid to be stepped on, stretchable-prolongable (700-1000 mm), easy to enter and exit cables along the feeder, providing full cable protection. Feeders can be jointed if longer lengths needed. Additional mounting accessory with screws for under desk fixation.					
Floor cable feeder	Black	Plastic	24/90/700	1	INS61200
	Silver	Plastic	24/90/700	1	INS61201
Mounting accessory for Floor cable feeder	Black	Plastic	15/55/25	1	INS61202
Self-closing cable wrap					
A self-closing cable wrapable sleeve, to arrange cables on or under the table in an organized manner. Easy to put cables inside, and to exit cables along the sleeve. No extra tools needed.					
Self-closing cable wrap Small (Ø 15 mm)	Black	Synthetic fibre	Ø 15/2000	1	INS61203
Self-closing cable wrap Medium (Ø 30 mm)	Black	Synthetic fibre	Ø 30/2000	1	INS61205
Self-closing cable wrap Large (Ø 40 mm)	Black	Synthetic fibre	Ø 40/2000	1	INS61207
Self-closing cable wrap Large (Ø 40 mm)	White	Synthetic fibre	Ø 40/2000	1	INS61208
Cable clamp					
Cable clamps, fixed with adhesive tape, for routing small bundles of cables on or under desk. A simple way to arrange cables on desk or hide them under desk.					
Cable clamp	White	Plastic	19/85/18	5	INS61209
Cable grommet					
Grommets mounted in Ø 60 mm or Ø 80 mm diameter holes in the desk. For routing cables through the desk and help make the installation easy. Cover with adjustable swivel opening.					
Cable grommet Ø 80 mm	White	Plastic	Ø 94/25	2	INS61211
	Black	Plastic	Ø 94/25	2	INS61212
Cable grommet Ø 60 mm	White	Plastic	Ø 71/24	2	INS61214
	Black	Plastic	Ø 71/24	2	INS61215
Grommets mounted in Ø 60 mm or Ø 80 mm diameter holes in the desk. For routing cables through the desk and help make the installation easy. Cover with brush opening.					
Cable grommet Ø 80 mm	Anodized	Alu	Ø 89/15	1	INS61210
Cable grommet Ø 60 mm	Anodized	Alu	Ø 67/15	1	INS61213

P148204

P148203

P148303

P148333

P148321

P148316

P148322

Floor sockets

Type	Colour	Material	Dimensions A/B/C (mm)	Qty per package	Ref. No.
Floor socket XS					
Floor socket to be flush mounted into concrete or raised access floors. Pre-equipped with a power socket outlet. Available in square or rounded shape, to suit different floor material. Protection degree IP44. The lid is openable 180°.					
Floor socket XS with DE std socket outlet - square	Grey	Metal	45/90/90	1	INS52100
Floor socket XS with DE std socket outlet - round	Grey	Metal	45/90/90	1	INS52101
Screeded floor box XS					
Screeded floor box for flush mounting cast-in, including sealed cover. With rigid combi-stubs and adjustable high threaded screw ring, adjustable 0-15 mm. Stubs provided with locking tabs of stainless steel. Intended for use in concrete floors.					
Screeded floor box XS	Grey	PE-HD	136/58/71	5	IMT36142A
Raised access floor box XS					
Raised access floor box for flush mounting in technical/raised access floors. Airtight. Intended for use in combination with floor socket XS.					
Raised access floor box XS	White	PP/TPE	71/47/71	5	IMT35032A

INS52100.eps

INS52101.eps

IMT36142A.eps

IMT35032A.eps

Floor boxes Metal and Pop-up floor sockets S

Type	Colour	Material	Dimensions A/B/C (mm)	Qty per package	Art.nr.
Innstøpningsbokser for gulvbokser					
Unica system metal floor boxes for casting into concrete floors with minimum thickness 100 mm to allow installation of Unica System+ floor boxes. The internal frame is 25 mm adjustable in height and allows the floor box to be rotated ~2.5 degrees for perfect adjustment of multiple floor boxes in a row. Contains projections for adapters for conduits with ø 20 - 50 mm, placed on all 4 sides. Taped up to keep out cement water.					



Unica System+ floor box M	Grey	Metal	100x228x228	1	INS52001
---------------------------	------	-------	-------------	---	----------



Unica System+ floor box L	Grey	Metal	100x304x228	1	INS52002
---------------------------	------	-------	-------------	---	----------



Unica System+ floor box XL	Grey	Metal	100x376x252	1	INS52003
----------------------------	------	-------	-------------	---	----------

Square floor socket S

Floor socket for installation in concrete or raised floors. Pre-fitted with a schuko socket and blind plate or RJ45 cat6 UTP. Connection to the power socket is via a terminal block. Protection level IP44. The lid is sprung, with soft opening. Supplied with recessed metal box.



Floor socket S with Schuko/blind plate - square IP44	Silver Metallic	Aluminium alloy	120x120x67	1	INS52171
--	-----------------	-----------------	------------	---	----------



Floor socket S with Schuko/RJ45 UTP - square IP44	Silver Metallic	Aluminium alloy	120x120x67	1	INS52172
---	-----------------	-----------------	------------	---	----------

Round floor socket S

Floor socket for installation in concrete or raised floors. Pre-fitted with a schuko socket and blind plate or RJ45 cat6 UTP. Connection to the power socket is via a terminal block. Supplied with recessed metal box.



Floor socket S with Schuko/blind plate - round IP20	Silver Metallic	Aluminium alloy	149x149x68	1	INS52174
---	-----------------	-----------------	------------	---	----------



Floor socket S with Schuko/RJ45 UTP - round IP20	Silver Metallic	Aluminium alloy	149x149x68	1	INS52175
--	-----------------	-----------------	------------	---	----------

Small square floor socket S

Floor socket for installation in concrete or raised floors. Pre-fitted with a schuko socket and blind plate or RJ45 cat6 UTP. The lid can be opened 180° degrees. Installation box not included.



Floor socket S with Schuko/blind plate - square IP44	Silver Metallic	Zinc alloy	90x90x47	1	INS52177
--	-----------------	------------	----------	---	----------



Floor socket S with Schuko/RJ45 UTP - square IP44	Silver Metallic	Zinc alloy	90x90x47	1	INS52178
---	-----------------	------------	----------	---	----------

Floor boxes

Type	Colour	Material	Dimensions A/B/C (mm)	Qty per package	Ref. No.
------	--------	----------	-----------------------	-----------------	----------

Floor boxes Plastic

Complete floor box, including casing, mounting frames with backbox for wiring devices type Unica, quick fixations and lid with cable exits. Also including strain relief devices (and partition wall for Floor box L). The lid to be quick-mounted onto casing. It can be fitted with floor material up to 6 mm thickness. The mounting frames are snapped into the casing. The height of the mounting frame is adjustable in three positions. Protection degree IP20. The Floor box is suitable for 45 x 45 mm single/45 x 90 mm double Unica outlets (45 x 45 mm equal 1 mod = one module).



Floor box M - 4 mod	Grey	Plastic	70/200/200	1	INS52120
---------------------	------	---------	------------	---	----------



Floor box L - 6 mod	Grey	Plastic	70/200/275	1	INS52122
---------------------	------	---------	------------	---	----------



Floor box L - 8 mod	Grey	Plastic	70/200/275	1	INS52124
---------------------	------	---------	------------	---	----------



Floor box XL - 12 mod	Grey	Plastic	70/224/345	1	INS52126
-----------------------	------	---------	------------	---	----------

Floor boxes Metal


Complete floor box, including casing, mounting frames with backbox for wiring devices type Unica, quick fixations and lid with cable exits. Also including strain relief devices (and partition wall for Floor box L). The lid to be quick-mounted onto casing. It can be fitted with floor material up to 15 mm thickness. The mounting frames are snapped into the casing. The height of the mounting frame is adjustable in three positions. Protection degree IP20. The Floor box is suitable for 45 x 45 mm single/45 x 90 mm double Unica outlets (45 x 45 mm equal 1mod=one module).



Floor box M - 4 mod	Grey	Metal	82/200/200	1	INS52121
---------------------	------	-------	------------	---	----------



Floor box L - 6 mod	Grey	Metal	82/200/275	1	INS52123
---------------------	------	-------	------------	---	----------



Floor box L - 8 mod	Grey	Metal	82/200/275	1	INS52125
---------------------	------	-------	------------	---	----------



Floor box XL - 12 mod	Grey	Metal	82/224/345	1	INS52127
-----------------------	------	-------	------------	---	----------

Accessories

Type	Colour	Material	Dimensions A/B/C (mm)	Qty per package	Ref. No.
Mounting frames for Unica outlets					
Mounting frame for floor boxes, including strain relief devices. The 2 mod frame is suitable for Floor box M and L. The 4 mod frame, including partition wall, is suitable for floor box L. The 3 mod frame is suitable for floor box XL. All mounting frames include a locking function to secure mounting in the floor box.					
Floor box mounting frame - 2 mod	White	PC	45/65/150	5	INS52150
Floor box mounting frame - 4 mod	White	PC	45/65/230	5	INS52151
Floor box mounting frame - 3 mod	White	PC	45/65/180	5	INS52152
Mounting frame backbox					
Backbox to be combined with the mounting frame in order to fulfill IP20. The 2 mod backbox is suitable for Floor box M and L. The 4 mod backbox is suitable for floor box L. The 3 mod backbox is suitable for floor box XL.					
Floor box mounting frame backbox - 2 mod	Green	PC	23/65/125	10	INS52153
Floor box mounting frame backbox - 4 mod	Green	PC	23/65/205	10	INS52154
Floor box mounting frame backbox - 3 mod	Green	PC	23/65/157	10	INS52155
Lid infill, linoleum					
Lid infill to be used in the lid of floor boxes. Provided with self-adhesive tape underneath. If the lid infill is to be used in a metal floor box, a 9 mm thick extra spacer material is required.					
Lid infill linoleum for floor box M	Anthracite	Linoleum	6/124/165	1	INS52156
Lid infill linoleum for floor box L	Anthracite	Linoleum	6/124/242	1	INS52158
Lid infill linoleum for floor box XL	Anthracite	Linoleum	6/147/314	1	INS52160
Lid infill, stainless steel					
Lid infill to be used in the lid of floor boxes. Provided with a protective film on the upper surface and a soft rubber layer with self-adhesive tape underneath. If the lid infill is to be used in a metal floor box, a 9 mm thick extra spacer material is required.					
Lid infill stainless steel for floor box M	-	Stainless steel	6/124/165	1	INS52157
Lid infill stainless steel for floor box L	-	Stainless steel	6/124/242	1	INS52159
Lid infill stainless steel for floor box XL	-	Stainless steel	6/147/314	1	INS52161
Floor box Cable exit					
Cable exit to be used in the floor boxes lid. Comes in rubber material. Slided onto the lid. Can be used to replace existing cable exit.					
Floor box M-L cable exit	Anthracite	Rubber	10/32/95	2	INS52162
Floor box XL cable exit	Anthracite	Rubber	10/32/125	2	INS52163

Modular units

Type	Colour	Material	Dimensions A/B/C (mm)	Qty per package	Ref. No.
Modular unit USB A/A					
Modular unit for pole, post or desk mounting. To be snap-fixed on pole or post, by means of end piece kit or intermediate piece kit. To be clamp-fixed on the desk, by means of end piece clamp kit. To be screw-fixed on desk, by means of on desk end piece and intermediate piece. Comes with two USB type A socket outlets. Prewired unit with quick connection (Mini-Wieland) to power at each end. Multiple Modular Units can be quick connected to each other, utilizing one and the same power circuit. Rating: 5 V / 2.1 A.					
Mod unit USB A/A	White	Aluminium	64/64/128	1	INS44200
Mod unit USB A/A	Anthracite	Aluminium	64/64/128	1	INS44201
Mod unit USB A/A	White/Grey	Aluminium/fabric	64/64/128	1	INS44202
Mod unit USB A/A	Anthracite/Grey	Aluminium/fabric	64/64/128	1	INS44203
Modular unit USB A/C					
Modular unit for pole, post or desk mounting. To be snap-fixed on pole or post, by means of end piece kit or intermediate piece kit. To be clamp-fixed on the desk, by means of end piece clamp kit. To be screw-fixed on desk, by means of on desk end piece and intermediate piece. Comes with USB type A and type C socket outlets. Prewired unit with quick connection (Mini-Wieland) to power at each end. Multiple Modular Units can be quick connected to each other, utilizing one and the same power circuit. Rating: 5 V / 2.4 A.					
Mod unit USB A/C	White	Aluminium	64/64/128	1	INS44204
Mod unit USB A/C	Anthracite	Aluminium	64/64/128	1	INS44205
Mod unit USB A/C	White/Grey	Aluminium/fabric	64/64/128	1	INS44206
Mod unit USB A/C	Anthracite/Grey	Aluminium/fabric	64/64/128	1	INS44207
Modular Unit for Media sockets (45 x 90)					
Modular unit for pole, post or desk mounting. To be snap-fixed on pole or post, by means of end piece kit or intermediate piece kit. To be clamp-fixed on the desk, by means of end piece clamp kit. To be screw-fixed on desk, by means of on desk end piece and intermediate piece. Provision for Unica Media sockets, i.e. data sockets or multimedia sockets (45 x 90 mm). Prewired unit with quick connection (Mini-Wieland) to power at each end. Multiple Modular Units can be quick connected to each other, utilizing one and the same power circuit.					
Mod unit VDI empty (45 x 90)	White	Aluminium	64/64/196	1	INS44208
Mod unit VDI empty (45 x 90)	Anthracite	Aluminium	64/64/196	1	INS44209
Mod unit VDI empty (45 x 90)	White/Grey	Aluminium/fabric	64/64/196	1	INS44210
Mod unit VDI empty (45 x 90)	Anthracite/Grey	Aluminium/fabric	64/64/196	1	INS44211
Modular Unit for Media sockets (45 x 45)					
Modular unit for pole, post or desk mounting. To be snap-fixed on pole or post, by means of end piece kit or intermediate piece kit. To be clamp-fixed on the desk, by means of end piece clamp kit. To be screw-fixed on desk, by means of on desk end piece and intermediate piece. Provision for Unica Media sockets, i.e. data sockets or multimedia sockets (45 x 45 mm). Prewired unit with quick connection (Mini-Wieland) to power at each end. Multiple Modular Units can be quick connected to each other, utilizing one and the same power circuit.					
Mod unit VDI empty (45 x 45)	White	Aluminium	64/64/151	1	INS44212
Mod unit VDI empty (45 x 45)	Anthracite	Aluminium	64/64/151	1	INS44213
Mod unit VDI empty (45 x 45)	White/Grey	Aluminium/fabric	64/64/151	1	INS44214
Mod unit VDI empty (45 x 45)	Anthracite/Grey	Aluminium/fabric	64/64/151	1	INS44215
Modular unit circuit breaker					
Modular unit for pole, post or desk mounting. To be snap-fixed on pole or post, by means of end piece kit or intermediate piece kit. To be clamp-fixed on the desk, by means of end piece clamp kit. To be screw-fixed on desk, by means of on desk end piece and intermediate piece. Equipped with a 2-Pole Residual current breaker with overcurrent protection (RCBO - Ref.no. A9D17216). Prewired unit with quick connection (Mini-Wieland) to power at each end. Multiple Modular Units can be quick connected to each other, utilizing one and the same power circuit. Rating: 16 A / 250 V.					
Mod unit - breaker	White	Aluminium	97/64/196	1	INS44216
Mod unit - breaker	Anthracite	Aluminium	97/64/196	1	INS44217
Mod unit - breaker	White/Grey	Aluminium/fabric	97/64/196	1	INS44218
Mod unit - breaker	Anthracite/Grey	Aluminium/fabric	97/64/196	1	INS44219

Modular units (continued)

Type	Colour	Material	Dimensions A/B/C (mm)	Qty per package	Ref. No.
Modular unit 2 x Power outlets (side-earthed) and USB A/C					
Modular unit for pole, post or desk mounting. To be snap-fixed on pole or post, by means of end piece kit or intermediate piece kit. To be clamp-fixed on the desk, by means of end piece clamp kit. To be screw-fixed on desk, by means of on desk end piece and intermediate piece. Comes with 2 x power socket outlets, side-earthed, and USB type A and type C socket outlets. Prewired unit with quick connection (Mini-Wieland) to power at each end. Multiple Modular Units can be quick connected to each other, utilizing one and the same power circuit. Rating: 16 A / 250 V, USB 5 V / 2.4 A.					
Mod unit - 2 x DE SO + USB A/C	White	Aluminium	64/64/218	1	INS44220
Mod unit - 2 x DE SO + USB A/C	Anthracite	Aluminium	64/64/218	1	INS44221
Mod unit - 2 x DE SO + USB A/C	White/Grey	Aluminium/fabric	64/64/218	1	INS44222
Mod unit - 2 x DE SO + USB A/C	Anthracite/Grey	Aluminium/fabric	64/64/218	1	INS44223
Modular unit 4 x Power outlets (side-earthed) and USB A/C					
Modular unit for pole, post or desk mounting. To be snap-fixed on pole or post, by means of end piece kit or intermediate piece kit. To be clamp-fixed on the desk, by means of end piece clamp kit. To be screw-fixed on desk, by means of on desk end piece and intermediate piece. Comes with 4 x power socket outlets, side-earthed, and USB type A and type C socket outlets. Prewired unit with quick connection (Mini-Wieland) to power at each end. Multiple Modular Units can be quick connected to each other, utilizing one and the same power circuit. Rating: 16 A / 250 V, USB 5 V / 2.4 A.					
Mod unit - 4 x DE SO + USB A/C	White	Aluminium	64/64/308	1	INS44232
Mod unit - 4 x DE SO + USB A/C	Anthracite	Aluminium	64/64/308	1	INS44233
Mod unit - 4 x DE SO + USB A/C	White/Grey	Aluminium/fabric	64/64/308	1	INS44234
Mod unit - 4 x DE SO + USB A/C	Anthracite/Grey	Aluminium/fabric	64/64/308	1	INS44235
Modular unit 2 x Power and 2 x Power uninterrupted outlets (side-earthed) and USB A/C					
Modular unit for pole, post or desk mounting. To be snap-fixed on pole or post, by means of end piece kit or intermediate piece kit. To be clamp-fixed on the desk, by means of end piece clamp kit. To be screw-fixed on desk, by means of on desk end piece and intermediate piece. Comes with 2 x normal power and 2 x uninterrupted power socket outlets, side-earthed, and USB type A and type C socket outlets. Prewired unit with quick connection (Mini-Wieland) to power at each end. Multiple modular units can be quick connected to each other, utilizing one and the same power circuit. Rating: 16 A / 250 V, USB 5 V / 2.4 A.					
Mod unit 2W/2R DE SO + USB A/C	White	Aluminium	64/64/308	1	INS44244
Mod unit 2W/2R DE SO + USB A/C	Anthracite	Aluminium	64/64/308	1	INS44245
Mod unit 2W/2R DE SO + USB A/C	White/Grey	Aluminium/fabric	64/64/308	1	INS44246
Mod unit 2W/2R DE SO + USB A/C	Anthracite/Grey	Aluminium/fabric	64/64/308	1	INS44247
Modular unit 4 x Power outlets (side-earthed), USB A/C and space for Media sockets					
Modular unit for pole, post or desk mounting. To be snap-fixed on pole or post, by means of end piece kit or intermediate piece kit. To be clamp-fixed on the desk, by means of end piece clamp kit. To be screw-fixed on desk, by means of on desk end piece and intermediate piece. Comes with 4 x power socket outlets, side-earthed, USB type A and type C socket outlets, and provision for Unica Media sockets. Prewired unit with quick connection (Mini-Wieland) to power at each end. Multiple modular units can be quick connected to each other, utilizing one and the same power circuit. Rating: 16 A / 250 V, USB 5 V / 2.4 A.					
Mod unit 4 x DE SO + USB A/C + VDI	White	Aluminium	64/64/421	1	INS44256
Mod unit 4 x DE SO + USB A/C + VDI	Anthracite	Aluminium	64/64/421	1	INS44257
Mod unit 4 x DE SO + USB A/C + VDI	White/Grey	Aluminium/fabric	64/64/421	1	INS44258
Mod unit 4 x DE SO + USB A/C + VDI	Anthracite/Grey	Aluminium/fabric	64/64/421	1	INS44259

Modular units (continued)

Type	Colour	Material	Dimensions A/B/C (mm)	Qty per package	Ref. No.
Modular unit 2 x Power and 2 x Power uninterrupted outlets (side-earthed), USB A/C and space for Media sockets					
Modular unit for pole, post or desk mounting. To be snap-fixed on pole or post, by means of end piece kit or intermediate piece kit. To be clamp-fixed on the desk, by means of end piece clamp kit. To be screw-fixed on desk, by means of on desk end piece and intermediate piece. Comes with 2 x power and 2 x power uninterrupted socket outlets, side-earthed, USB type A and type C socket outlets, and provision for Unica Media sockets. Prewired unit with quick connection (Mini-Wieland) to power at each end. Multiple modular units can be quick connected to each other, utilizing one and the same power circuit. Rating: 16 A / 250 V, USB 5 V / 2.4 A.					
Mod unit 2W/2R DE SO + USB A/C + VDI	White	Aluminium	64/64/421	1	INS44268
Mod unit 2W/2R DE SO + USB A/C + VDI	Anthracite	Aluminium	64/64/421	1	INS44269
Mod unit 2W/2R DE SO + USB A/C + VDI	White/Grey	Aluminium/fabric	64/64/421	1	INS44270
Mod unit 2W/2R DE SO + USB A/C + VDI	Anthracite/Grey	Aluminium/fabric	64/64/421	1	INS44271
Modular unit Wireless charger					
Modular Unit for desk mounting. To be clamp-fixed on the desk, by means of end piece clamp kit. To be screw-fixed on desk, by means of on desk end piece and intermediate piece. Comes with a wireless charger (Qi certified). Includes a LED indicator for charging. Prewired unit with quick connection (Mini-Wieland) to power at each end. Multiple Modular Units can be quick connected to each other, utilizing one and the same power circuit. Rating: 10 W.					
Mod unit - wireless charging	Anthracite/Grey	Aluminium/fabric	149/99/128	1	INS44324

Cables

Type	Colour	Material	Dimensions A/B/C (mm)	Qty per package	Ref. No.
Cables with straight quick-connector					
Cable for modular unit power connection. Comes in different lengths. One cable end equipped with a straight female quick connector (Mini-Wieland) towards modular unit, the other end equipped with an angled contour plug. Cable spec 3 x 1.5 mm ² , Ø 8.3 mm, 250 V, 16 A.					
M unit cable 3 m - 1.5 mm ² - straight	White	HF	55/38/3000	1	INS44288
M unit cable 6 m - 1.5 mm ² - straight	White	HF	55/38/6000	1	INS44289
M unit cable 10 m - 1.5 mm ² - straight	White	HF	55/38/10000	1	INS44290
Cable for modular unit power connection. Comes in different lengths. One cable end equipped with a straight female quick connector (Mini-Wieland) towards modular unit, the other end equipped with an angled contour plug. Cable spec halogen-free 3 x 2.5 mm ² , Ø 10.3 mm, 250 V, 16 A.					
M unit cable 3 m - 2.5 mm ² - straight	White	HF	55/38/3000	1	INS44291
M unit cable 6 m - 2.5 mm ² - straight	White	HF	55/38/6000	1	INS44292
M unit cable 10 m - 2.5 mm ² - straight	White	HF	55/38/10000	1	INS44293
Cables with angled quick-connector					
Cable for modular unit power connection. Comes in different lengths. One cable end equipped with an angled female quick connector (Mini-Wieland) towards modular unit, the other end equipped with an angled contour plug. Cable spec 3 x 1.5 mm ² , Ø 8.3 mm, 250 V, 16 A.					
M unit cable 3 m - 1.5 mm ² - angled	White	HF	55/38/3000	1	INS44294
M unit cable 6 m - 1.5 mm ² - angled	White	HF	55/38/6000	1	INS44295
M unit cable 10 m - 1.5 mm ² - angled	White	HF	55/38/10000	1	INS44296
Cable for modular unit power connection. Comes in different lengths. One cable end equipped with an angled female quick connector (Mini-Wieland) towards modular unit, the other end equipped with an angled contour plug. Cable spec 3 x 2.5 mm ² , Ø 10.3 mm, 250 V, 16 A.					
M unit cable 3 m - 2.5 mm ² - angled	White	HF	55/38/3000	1	INS44297
M unit cable 6 m - 2.5 mm ² - angled	White	HF	55/38/6000	1	INS44298
M unit cable 10 m - 2.5 mm ² - angled	White	HF	55/38/10000	1	INS44299



Connectors

Type	Colour	Material	Dimensions A/B/C (mm)	Qty per package	Ref. No.
Connector 3-pole					
Connector (Mini-Wieland) for modular unit power connection, with screw connection and strain relief. Comes in straight or angled outfit. For rigid and fine-stranded cables 1.5 - 2.5 mm ² (cable dia. max. 9 mm), 250 V, 16 A, unassembled.					
Male mini connector straight	White	PA	15/24/54	5	INS44303
Male mini connector angled	White	PA/PC	32/24/35	5	INS44304
Female mini connector straight	White	PA	15/24/54	5	INS44305
Female mini connector angled	White	PA/PC	32/24/35	5	INS44306



Desk unit M accessories

Type	Colour	Material	Dimensions A/B/C (mm)	Qty per package	Ref. No.
End piece for on desk fixation					
End piece for on desk mounting. Comes in two parts and including two cable grommets. Lower part to be screw-fixed on desk, and snap-fixed with modular unit. Upper, visible part to be snap-fixed onto lower part and modular unit. Cable grommets are used in case of straight cable exit, parts prepared with knock-outs.					
Mod unit desk/end piece	White	ABS	65/55/66	1	INS44282
Mod unit desk/end piece	Anthracite	ABS	65/55/66	1	INS44283



Intermediate piece for on desk fixation					
Intermediate piece for on desk mounting. Comes in two parts. Lower part to be screw-fixed on desk, and snap-fixed with modular unit. Upper, visible part to be snap-fixed onto lower part and modular unit.					
Mod unit desk/intermed piece	White	ABS	67/27/67	1	INS44280
Mod unit desk/intermed piece	Anthracite	ABS	67/27/67	1	INS44281

End piece kit for on desk clamping					
End piece for on desk clamping. Comes in two parts and including two cable grommets. Lower part to be clamped on desk, and snap-fixed with modular unit. Upper, visible part to be snap-fixed onto lower part and modular unit. Cable grommets are used in case of straight cable exit, parts prepared with knock-outs.					
Mod unit desk/end piece clamp kit	White	Metal/ABS	196/55/81	1	INS44284
Mod unit desk/end piece clamp kit	Anthracite	Metal/ABS	196/55/81	1	INS44285



Intermediate piece for on desk clamping					
Intermediate piece for on desk clamping. Comes in two parts. Lower part to be clamped on desk, and snap-fixed with modular unit. Upper, visible part to be snap-fixed onto lower part and modular unit.					
Mod unit desk/intermed piece clamp	White	Metal/ABS	196/27/81	1	INS44286
Mod unit desk/intermed piece clamp	Anthracite	Metal/ABS	196/27/81	1	INS44287



Phone holder					
Phone holder for desk unit M and L. To be snap-fixed on modular unit end piece. For placing and having a good visual of your smartphone.					
Phone holder - desk unit	Transparent	PC	113/75/81	1	INS44077




Office storage accessory					
Office storage for desk unit M and L. To be snap-fixed on modular unit end piece. For placing small office items (eraser, clips etc.) and keeping good order at your workplace.					
Office storage accessory - desk unit	Transparent	PC	24/120/120	1	INS44078



Desk unit L

Type	Colour	Material	Dimensions A/B/C (mm)	Qty per package	Ref. No.
Desk unit L					
Complete desk unit including an on-desk and under-desk connectivity part, and clamping system for fixation on the desk. No drilling in the desk needed. Comes on-desk with 2x power socket (side-earthed) and USB type A and type C socket outlets, and under-desk with 2x power socket (side-earthed) and USB type A and type C socket outlets. On-desk connectivity part for daily access/use, under-desk part for more permanent connectivity. Prewired unit with quick connection (Mini-Wieland) to power. Desk thickness max. 40 mm. Rating: 16 A / 250 V, USB 5 V / 2.4 A.					
2 x DE SO + USB A/C (on/under)	White/Grey	Aluminium/ fabric	196/81/312	1	INS44400
2 x DE SO + USB A/C (on/under)	Anthracite/ Grey	Aluminium/ fabric	196/81/312	1	INS44401



Complete desk unit including an on-desk and under-desk connectivity part, and clamping system for fixation on the desk. No drilling in the desk needed. Comes on-desk with 2x power socket (side-earthed) and USB type A and type C socket outlets, and under-desk with 2x power socket (side-earthed) and provision for 1x RJ data socket. On-desk connectivity part for daily access/use, under-desk part for more permanent connectivity. Prewired unit with quick connection (Mini-Wieland) to power. Desk thickness max. 40 mm. Rating: 16 A / 250 V, USB 5 V / 2.4 A.					
2 x DE SO + USB A/C (RJ under)	White/Grey	Aluminium/ fabric	196/81/312	1	INS44404
2 x DE SO + USB A/C (RJ under)	Anthracite/ Grey	Aluminium/ fabric	196/81/312	1	INS44405



Desk unit L accessory

Type	Colour	Material	Dimensions A/B/C (mm)	Qty per package	Ref. No.
Desk unit L accessory					
Decoration panel including sliding fixation on desk unit L. For improved finish of final desk unit L installation, if side-mounted on desk and visually exposed from backside. Comes with sliding guides for quick-mounting on desk unit L.					
Decoration panel	Grey	Fabric	10/275/365	1	INS44408



Desk unit S

Type	Colour	Material	Dimensions A/B/C (mm)	Qty per package	Ref. No.
Desk Unit S					
Desk Unit to be clamp-fixed on the desk, by means of spring design. No tools or drilling in the desk needed. Portable unit, can be easily de-clamped and re-clamped. Comes with power socket (side-earthed), and USB type A and type C socket outlets. Prewired unit with 2 meters cable and plug for direct connection to power. An elastic strap to handle cable underneath is included. Easy and ergonomic access at arms length. Desk thickness max. 45 mm. Rating: 16 A / 250 V, USB 5 V / 3.1 A.					
Desk Unit S with DE std socket outlet and USB A/C	White/Grey	PA6/fabric	140/60/110	1	INS44050



Desk Unit S with DE std socket outlet and USB A/C	Anthracite/ Grey	PA6/fabric	140/60/110	1	INS44051
---	---------------------	------------	------------	---	-----------------



Pole profile

Type	Colour	Material	Dimensions A/B/C (mm)	Qty per package	Ref. No.
Pole profile					
Pole profile including two soft cable entry compartments, as base component for Pole mounting. Two soft entry compartments enable quick cable storage inside the profile. Cable capacity in each compartment 670 mm ² . Can be used for mounting of both a single-sided or double-sided Pole. The Pole profile is compatible with the Modular Units and Pole accessories (pole foot, end pieces etc.).					
Profile - Pole - 1.9 m	White	Aluminum	1900/60/60	1	INS45000
Profile - Pole - 2.2 m	White	Aluminum	2200/60/60	1	INS45001
Profile - Pole - 1.9 m	Anthracite	Aluminum	1900/60/60	1	INS45005
Profile - Pole - 2.2 m	Anthracite	Aluminum	2200/60/60	1	INS45006



Pole accessories

Type	Colour	Material	Dimensions A/B/C (mm)	Qty per package	Ref. No.
End piece for modular unit fixation on pole					
End piece for modular unit mounting on pole profile. Comes in two parts (fixation and decoration part) including an embedded screw-fixation. Fixation part to be snap-fixed on the pole profile and tightened by means of an embedded screw after mounting of modular unit. Decoration part to be snap-fixed onto fixation part and modular unit. Fixation of modular unit on pole profile requires two end pieces.					
M unit end piece - Pole	White	PC/ABS	58/67/112	1	INS44307
M unit end piece - Pole	Anthracite	PC/ABS	58/67/112	1	INS44308



Dual end piece for modular unit fixation on pole

Dual end piece for mounting of modular units on double-sided pole. Comes in three parts (1 x fixation and 2 x decoration parts) including embedded screw-fixation. Fixation part to be snap-fixed on the pole profile, and tightened by means of embedded screws after mounting of modular unit. Decoration parts to be snap-fixed onto fixation part and modular unit. Dual end piece enables to mount double-sided modular units in parallel. Fixation of modular unit on pole profile requires two dual end pieces.

M unit end piece dual - Pole	White	PC/ABS	58/67/207	1	INS44309
M unit end piece dual - Pole	Anthracite	PC/ABS	58/67/207	1	INS44310



Intermediate piece for modular unit fixation on pole

Intermediate piece for modular unit mounting on pole profile, covering the joint between two modular units. Comes in two parts (fixation and decoration part) including an embedded screw-fixation. Fixation part to be snap-fixed on the pole profile, and tightened by means of an embedded screw after mounting of modular unit. Decoration part to be snap-fixed onto fixation part and modular unit.

M unit intermed piece - Pole	White	PC/ABS	28/67/112	1	INS44311
M unit intermed piece - Pole	Anthracite	PC/ABS	28/67/112	1	INS44312



Ceiling frame

Ceiling frame intended to lead self-closing cable wrap (Ø 40 mm) through false ceiling. To be mounted in circular hole, Ø 80 mm, by using three included clamps. Also including cable tie, to fix the self-closing wrap.

Ceiling frame - Pole	White	ABS	75/125/125	1	INS45010
----------------------	-------	-----	------------	---	----------



Pole end piece

Pole end piece for handling cable exit on pole profile top. Including screws for fixation of end piece on pole profile. To be combined with self-closing cable wrap (Ø 40 mm) of 2 m length, enabling pole action radius 1.5 m from the connection point in the ceiling.

Pole end piece	White	PC	273/66/204	1	INS45011
Pole end piece	Anthracite	PC	273/66/204	1	INS45022



Pole accessories (continued)

Type	Colour	Material	Dimensions A/B/C (mm)	Qty per package	Ref. No.
Self-closing cable wrap					
A self-closing cable wrapable sleeve, to arrange cables exiting the Pole in an organized manner. To be combined with Pole end piece. Easy to put cables inside, and to exit cables along the sleeve. No extra tools needed.					
Self-closing cable wrap Large (Ø 40 mm)	Black	Synthetic fibre	Ø 40/2000	1	INS61207
Self-closing cable wrap Large (Ø 40 mm)	White	Synthetic fibre	Ø 40/2000	1	INS61208



Pole table

Pole table for mounting on pole. Including an oak table. The oak table, Ø 600 mm, has a slot for simplified pole profile mounting at chosen height. For temporary placement of tablets, smartphones etc utilizing pole power access for charging. Mounted together with pole table support.

Table Pole	Oak brown	Oak	18/600/600	1	INS45017
------------	-----------	-----	------------	---	----------



Pole table support

Pole table support kit for mounting on pole. Including a metal fixation kit with screws for mounting on pole profile. Also including a coat hanger function. The pole table is mounted on top of the support kit and is screw fixed.

Table support kit	Chrome	Metal	125/270/270	1	INS45026
-------------------	--------	-------	-------------	---	----------



Pole foot

Round foot for pole, to be fixed to the bottom part of the pole profile by means of 4 x self-threading screws of 4mm (included). Suitable both for single- and double-sided poles.

Foot - Pole - round	White	Cast iron/ Painted	50/400/420	1	INS45018
Foot - Pole - round	Anthracite	Cast iron/ Painted	50/400/420	1	INS45019



Pre-wired poles



Type	Colour	Material	Dimensions A/B/C (mm)	Qty per package	Ref. No.
Single-sided pole					
Free-standing and movable pole, single-sided. Pre-wired, configured with 4 x power outlets, side-earthed, USB type A and type C socket outlets, with cable, and 2 x Cat 6 UTP (Actassi) with cable. Including end piece with self-closing cable wrap and mounting instruction. Length of self-closing cable wrap 2.0 m, action radius 1.5 m from the connection point in the ceiling. Earthed. Foot to be ordered separately. External cables: one unshielded 3 x 1.5 mm ² cable with side-earthed plug, 6.0 m total length, and two Cat 6 UTP (Actassi) data cables with RJ45 plugs, 10.0 m total length. Rating: 16 A / 250 V, USB 5 V / 2.4 A.					
Pole 3S - 2.15 m - 4 x DE SO + USB A/C + 2 x C6UTP	White	Aluminum	2150+2000/210/70	1	INS45100*
Pole 3S - 2.15 m - 4 x DE SO + USB A/C + 2 x C6UTP	Anthracite/ Grey	Aluminum	2150+2000/210/70	1	INS45101*
Free-standing and movable pole, single-sided. Pre-wired, configured with 4 x power outlets, side-earthed, USB type A and type C socket outlets, with cable, and 2 x Cat 6A S/FTP (Actassi) with cable. Including end piece with self-closing cable wrap and mounting instruction. Length of self-closing cable wrap 2.0 m, action radius 1.5 m from the connection point in the ceiling. Earthed. Foot to be ordered separately. External cables: one unshielded 3 x 1.5 mm ² cable with side-earthed plug, 6.0 m total length, and two Cat 6A S/FTP (Actassi) data cables with RJ45 plugs, 10.0 m total length. Rating: 16 A / 250 V, USB 5 V / 2.4 A.					
Pole 3S - 2.15 m - 4 x DE SO + USB A/C + 2 x C6ASTP	White	Aluminum	2150+2000/210/70	1	INS45102*
Pole 3S - 2.15 m - 4 x DE SO + USB A/C + 2 x C6ASTP	Anthracite/ Grey	Aluminum	2150+2000/210/70	1	INS45103*
Double-sided pole					
Free-standing and movable pole, double-sided. Pre-wired, each side configured with 4 x power outlets, side-earthed, USB type A and type C socket outlets, with cable, and 2 x Cat 6 UTP (Actassi) with cable. Including end piece with self-closing cable wrap and mounting instruction. Length of self-closing cable wrap 2.0 m, action radius 1.5 m from the connection point in the ceiling. Earthed. Foot to be ordered separately. External cables: two unshielded 3 x 1.5 mm ² cable with side-earthed plug, 6.0 m total length, and two Cat 6 UTP (Actassi) data cables with RJ45 plugs, 10.0 m total length. Rating: 16 A / 250 V, USB 5 V / 2.4 A.					
Pole 3D - 2.15 m - 4 x DE SO + USB A/C + 2 x C6UTP	White	Aluminum	2150+2000/280/70	1	INS45104*
Pole 3D - 2.15 m - 4 x DE SO + USB A/C + 2 x C6UTP	Anthracite/ Grey	Aluminum	2150+2000/280/70	1	INS45105*
Free-standing and movable pole, double-sided. Pre-wired, each side configured with 4 x power outlets, side-earthed, USB type A and type C socket outlets, with cable, and 2 x Cat 6A S/FTP (Actassi) with cable. Including end piece with self-closing cable wrap and mounting instruction. Length of self-closing cable wrap 2.0 m, action radius 1.5 m from the connection point in the ceiling. Earthed. Foot to be ordered separately. External cables: two unshielded 3 x 1.5 mm ² cable with side-earthed plug, 6.0 m total length, and two Cat 6A S/FTP (Actassi) data cables with RJ45 plugs, 10.0 m total length. Rating: 16 A / 250 V, USB 5 V / 2.4 A.					
Pole 3D - 2.15 m - 4 x DE SO + USB A/C + 2 x C6ASTP	White	Aluminum	2150+2000/280/70	1	INS45106*
Pole 3D - 2.15 m - 4 x DE SO + USB A/C + 2 x C6ASTP	Anthracite/ Grey	Aluminum	2150+2000/280/70	1	INS45107*

(*) Foot to be ordered separately.

Post profile



Type	Colour	Material	Dimensions A/B/C (mm)	Qty per package	Ref. No.
Post profile					
Post profile including two soft cable entry compartments, as base component for Post mounting. Two soft entry compartments enable quick cable storage inside the profile. Cable capacity in each compartment 670 mm ² . Can be used for mounting of both a single-sided or double-sided Post. The Post profile is compatible with the Modular Units and Post accessories (post foot, end pieces etc.).					
Profile - Post - 0.65 m	White	Aluminum	650/60/60	1	INS45002
Profile - Post - 1.0 m	White	Aluminum	1000/60/60	1	INS45003
Profile - Post - 0.65 m	Anthracite	Aluminum	650/60/60	1	INS45007
Profile - Post - 1.0 m	Anthracite	Aluminum	1000/60/60	1	INS45008

Post accessories



Type	Colour	Material	Dimensions A/B/C (mm)	Qty per package	Ref. No.
End piece for modular unit fixation on post					
End piece for modular unit mounting on post profile. Comes in two parts (fixation and decoration part) including an embedded screw-fixation. Fixation part to be snap-fixed on the post profile and tightened by means of an embedded screw after mounting of modular unit. Decoration part to be snap-fixed onto fixation part and modular unit. Fixation of modular unit on post profile requires two end pieces.					
M unit end piece - Post	White	PC/ABS	58/67/112	1	INS44307
M unit end piece - Post	Anthracite	PC/ABS	58/67/112	1	INS44308



Type	Colour	Material	Dimensions A/B/C (mm)	Qty per package	Ref. No.
Dual end piece for modular unit fixation on post					
Dual end piece for mounting of modular units on double-sided post. Comes in three parts (1 x fixation and 2 x decoration parts) including embedded screw-fixation. Fixation part to be snap-fixed on the post profile, and tightened by means of embedded screws after mounting of modular unit. Decoration parts to be snap-fixed onto fixation part and modular unit. Dual end piece enables to mount double-sided modular units in parallel. Fixation of modular unit on post profile requires two dual end pieces.					
M unit end piece dual - Post	White	PC/ABS	58/67/207	1	INS44309
M unit end piece dual - Post	Anthracite	PC/ABS	58/67/207	1	INS44310



Type	Colour	Material	Dimensions A/B/C (mm)	Qty per package	Ref. No.
Intermediate piece for modular unit fixation on post					
Intermediate piece for modular unit mounting on post profile, covering the joint between two modular units. Comes in two parts (fixation and decoration part) including an embedded screw-fixation. Fixation part to be snap-fixed on the post profile, and tightened by means of an embedded screw after mounting of modular unit. Decoration part to be snap-fixed onto fixation part and modular unit.					
M unit intermed piece - Post	White	PC/ABS	28/67/112	1	INS44311
M unit intermed piece - Post	Anthracite	PC/ABS	28/67/112	1	INS44312



Type	Colour	Material	Dimensions A/B/C (mm)	Qty per package	Ref. No.
Post end piece with handle					
Post end piece with handle. Including handle in leather, and screws. For fixation of end piece on post profile.					
Post end piece with handle	White	PC/leather	130/65/65	1	INS45012
Post end piece with handle	Anthracite	PC/leather	130/65/65	1	INS45023



Type	Colour	Material	Dimensions A/B/C (mm)	Qty per package	Ref. No.
Post end piece					
Post end piece with screws. For fixation of end piece on post profile.					
Post end piece	White	PC	24/65/65	1	INS45024



Post end piece	Anthracite	PC	24/65/65	1	INS45025
----------------	------------	----	----------	---	-----------------

Post accessories (continued)

Type	Colour	Material	Dimensions A/B/C (mm)	Qty per package	Ref. No.
Post table					
Post table for mounting on post. Including an oak table. The oak table, Ø 600 mm, to be mounted on top of the post profile. For temporary placement of tablets, smartphones etc utilizing post power access for charging. Mounted together with post table support.					
Table Post	Oak brown	Oak	18/600/600	1	INS45015



Post table for mounting on post. Including an oak table. The oak table, Ø 600 mm, to be mounted on top of the post profile. The table has a center drilled hole of Ø 60 mm, for mounting of desk unit XS. For temporary placement of tablets, smartphones etc utilizing post power access for charging. Mounted together with post table support.					
Table Post, center hole Ø 60 mm	Oak brown	Oak	18/600/600	1	INS45016

Post table support

Post table support kit for mounting on post. Including a metal fixation kit with screws for mounting on post profile. Also including a coat hanger function. The post table is mounted on top of the support kit and is screw fixed.

Table support kit	Chrome	Metal	125/270/270	1	INS45026
-------------------	--------	-------	-------------	---	----------



Post foot

Round foot for post, to be fixed to the bottom part of the post profile by means of 4 x self-threading screws of 4 mm (included). Suitable both for single- and double-sided posts.

Foot - Post - round	White	Cast iron / Painted	50/400/420	1	INS45018
Foot - Post - round	Anthracite	Cast iron / Painted	50/400/420	1	INS45019



Pre-wired posts

Single-sided post

Free-standing and movable post, single-sided. Pre-wired, configured with 4 x power outlets, side-earthed, USB type A and type C socket outlets, with cable, and 2 x Cat 6 UTP (Actassi) with cable. Including end piece and mounting instruction. Earthed. Foot included. External cables: one unshielded 3 x 1.5 mm² cable with side-earthed plug, 6.0 m total length, and two Cat 6A S/FTP (Actassi) data cables with RJ45 plugs, 10.0 m total length.

Post 3S - 0.68 m - 4 x DE SO + USB A/C + 2 x C6UTP	White	Aluminum	680/135/70	1	INS45108
--	-------	----------	------------	---	----------



Free-standing and movable post, single-sided. Pre-wired, configured with 4 x power outlets, side-earthed, USB type A and type C socket outlets, with cable, and 2 x Cat 6A S/FTP (Actassi) with cable. Including end piece and mounting instruction. Earthed. Foot included. External cables: one unshielded 3 x 1.5 mm² cable with side-earthed plug, 6.0 m total length, and two Cat 6A S/FTP (Actassi) data cables with RJ45 plugs, 10.0 m total length.

Post 3S - 0.68 m - 4 x DE SO + USB A/C + 2 x C6ASTP	White	Aluminum	680/135/70	1	INS45109
---	-------	----------	------------	---	----------



Single-sided post with table

Free-standing and movable post, single-sided. Pre-wired, configured with 2 x power outlets, side-earthed, USB type A and type C socket outlets, with cable. Table at sitting height (0.75 m) with center hole Ø 60 mm and desk unit XS with 1 x power outlet, side-earthed, USB type A socket outlet. Including end piece and mounting instruction. Earthed. Foot included. External cables: one unshielded 3 x 1.5 mm² cable with side-earthed plug, 6.0 m total length.

Post 3S - 0.75 m - 2 x DE SO + USB A/C + table DUXS	White	Aluminum	750/600/70	1	INS45110
---	-------	----------	------------	---	----------



Free-standing and movable post, single-sided. Pre-wired, configured with 2 x power outlets, side-earthed, USB type A and type C socket outlets, with cable. Table at standing height (1.1 m) with center hole Ø 60 mm and desk unit XS with 1 x power outlet, side-earthed, USB type A socket outlet. Including end piece and mounting instruction. Earthed. Foot included. External cables: one unshielded 3 x 1.5 mm² cable with side-earthed plug, 6.0 m total length.

Post 3S - 1.1 m - 2 x DE SO + USB A/C + table DUXS	White	Aluminum	1100/600/70	1	INS45111
--	-------	----------	-------------	---	----------



Switch to smart design

Extra space

A low mounting depth of 21mm provides extra space for wiring.

Easy removal

Inserts can be removed from the front and back thanks to the clearly visible notches.



Robust clipping

The improved design of the clipping system secures the insert in the fixing frame.

Clear on/off status

The large rocker clearly indicates the status of the switch in the On and Off positions. When switched off, the rocker angle is now wider for increased separation of the contacts avoiding electrical arcs, contributing to make the switch more secure, and improving electrical performance.

Quick wiring

Prominent quick release buttons are easily accessible, making wiring quick and easy.



Effortless wiring

Conical cable entries make it easier to feed the connection wires into the terminal blocks. Even thicker wires can be connected in less time thanks to the larger openings.

Simple connection

A wiring diagram is printed on the rear of the switch and push-button base to make connection options clearly visible.

Covered cable entries

Cable entries that are not needed are covered, avoiding improper installation.




Easy indicator conversion

It's easy to convert any switch to a switch with an indicator lamp. Simply remove the standard rocker and add the accessory lamp and a rocker with light window.

Convenient testing from the front

Unica switch and push-button inserts are designed to make installation easy, even for inserts that have already been installed. Checkpoints allow convenient testing of all functions and measuring from the front. Plus, there's no need to disassemble the switch – the rocker can easily be removed to access the checkpoints.

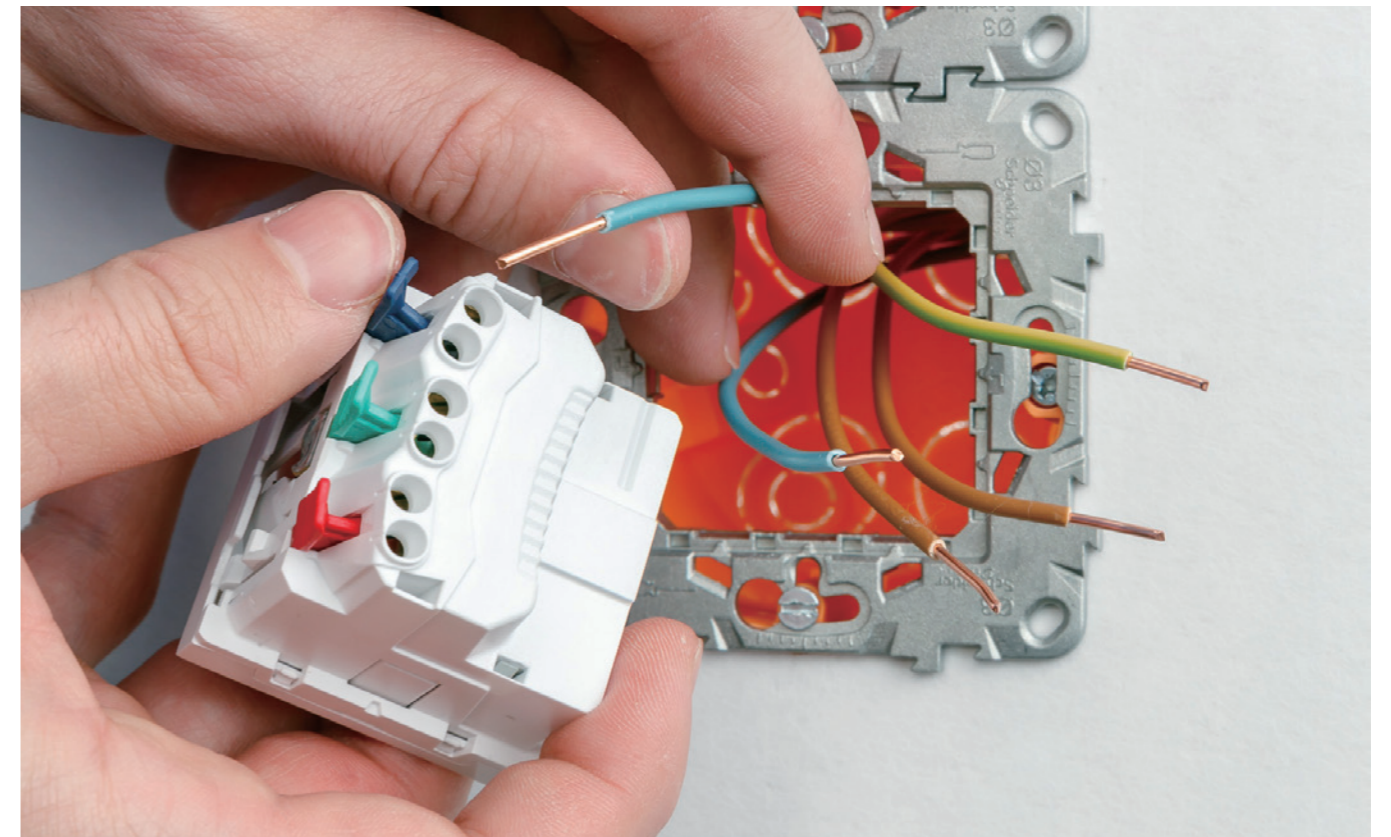

Special functions



One-way switch and push-buttons

For one-way switches and push-buttons, the phase and neutral cable entries are both on the top. This allows for simpler and faster wiring, without having to turn the insert to wire the other cable.

Slim insert

All white switch inserts come with a smaller housing, which offers more space for easy and fast wiring.



Intermediate switch

Having different colors for the two circuits makes it easy to distinguish between each for simpler and faster installations.

Push-button upgradable


All switch inserts with aluminium or anthracite rockers can be upgraded to a push-button due to the larger housing and push-button spring.



Sockets with screwless terminals

Extra space

A low mounting depth of 21mm provides extra space for wiring.

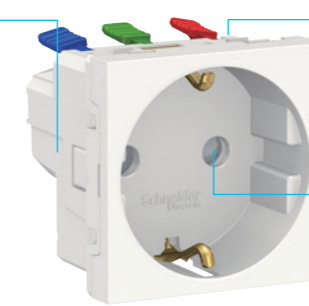

Easy removal


Inserts can be removed from the front and back thanks to the clearly visible notches. The center plate can also be removed easily.

Shock protection

Integrated shutters protect against accidental contact and the ingress of foreign objects.

Effortless wiring

Conical cable entries make it easier to feed the connection wires into the terminal blocks. Even thicker wires can be connected in less time thanks to the larger openings.

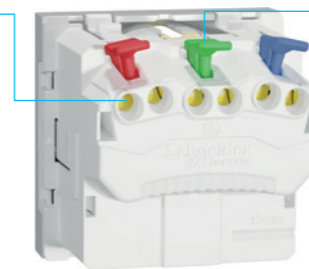


Quick wiring

Screwless socket-outlet terminals and color-coded quick release buttons making wiring quick and easy, without the need to remove the centre plate.

Sockets with screw terminals

Extra space

A low mounting depth of 21mm provides extra space for wiring.

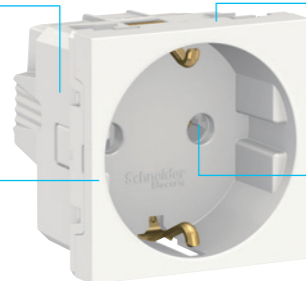

Easy removal

Inserts can be removed from the front and back thanks to the clearly visible notches. The center plate can also be removed easily.

Unclipped center plate

The center plate is unclipped, allowing easy removal for wiring.

Shock protection

Integrated shutters protect against accidental contact and the ingress of foreign objects.

Large cable entries

Large cable entries allow wiring of 2,5mm² and 4mm² rigid and flexible cables.

Fast wiring

With the cable entries beside each other, you can cut all wires to the same length. The screws are positioned unfixed, so you don't have unscrew them before you start to wire the cables.

Improved protection

Cable entries are clearly separated, making wiring more intuitive and avoiding short-circuit risk when flexible wires are used.




Unica accepts OptiLine 45 direct clipping

Unica facilitates faster installs through clever time-saving innovations. Because the range features 40mm x 40mm inserts, it accepts OptiLine 45 direct clipping to the trunking, poles and posts. There's no need to cut anything out or use adaptors – you just clip it into place.

One range for both applications

Unica allows for classical installations with wall boxes and trunking making the range uniquely simplified with no compromise on design. The switches installed on the wall box and the inserts clipped to the trunking are the same, creating a robust and flexible solution – no adaptors necessary.

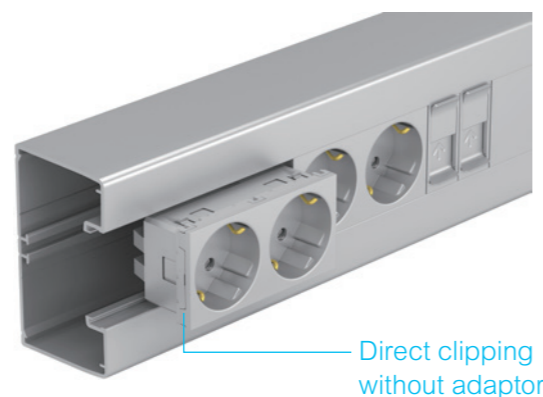

Simply efficient installation

Switch to simple efficiency on every install with new Unica System +. Clever features and design make the most used inserts – double sockets and RJ45 – fast and easy to install.

Double socket-outlet

Screw IPT terminal

The new Unica double socket-outlets feature insulated piercing terminals. You don't have to insulate the wires with a tool – you simply insert the wires, close the levers and the insulation happens automatically. Disassembling is also easy, and inserts can be used again.

Screws on the back



There's no need to remove the center plate to screw – the center plate is simply clipped in.

Flexible cable sizes

1,5mm² and 2,5mm² rigid and flexible cables can be inserted.

Easy installation

The big levers can be opened up to 90°, which offers very easy access for wiring in, and removing cables.

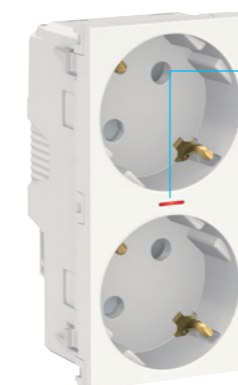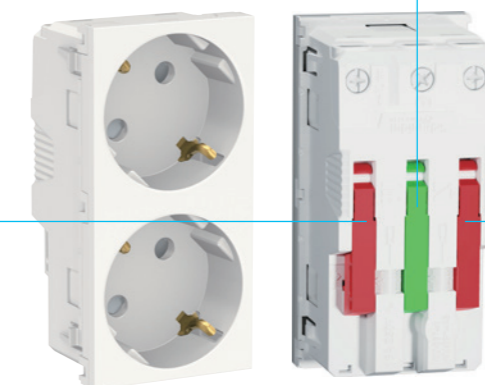

Indicator light

Double socket-outlets are also available with an indicator light.

RJ45

Time-saving installation

Unica offers several designs of RJ45 center plate. The double and quadruple versions are easy and fast to install. It also means you only need one device and less space for up to four connectors.

Convenient label holders

Used to identify the connected devices.



Protective shutters

Prevent ingress of dust and other objects when plug is not in use.

Total flexibility

The center plates can be used with any S1 Schneider Electric connector.

No adaptors needed

You can also clip inclined one or two module RJ45 connectors to the workstations. The bar on the fixing frame allows a secure fixing without the need for an adaptor.



Unica System+

10 AX - 250 V AC switches

	One-way	Two-way	Two-way with neutral terminal	Intermediate	Double one-way	Double two-way
2 modules						
white	NU320118	NU320318 (1) NU320318F (2)	NU320318S	NU320518	NU321118	NU321318 (1) NU321318F (2)
aluminium	NU320130	NU320330	NU320330S	NU320530	-	NU321330
anthracite	NU320154	NU320354	NU320354S	NU320554	-	NU321354
1 module						
white	NU310118	NU310318 (1) NU310318F (2)	NU310318S	NU310518		
aluminium	NU310130	NU310330	NU310330S	NU310530		
anthracite	NU310154	NU310354	NU310354S	NU310554		

- Characteristics**
- Connection: screwless terminals
 - Cables: 1 to 2,5 mm² rigid/flexible
 - Lightable with NU9825A, NU9823AM and NU9825AZ LED lamps and rockers with visor

(1) flow
(2) pack / box

16 AX - 250 V AC switches

	One-way	Two-way	2 poles	2 poles with indication lamp
2 modules				
white	NU326118	NU326318	NU326218	NU326218S
aluminium	-	NU326330	NU326230	NU326230S
anthracite	-	NU326354	NU326254	NU326254S
1 module				
white	NU316118	NU316318	NU316218	NU316218S
aluminium	-	NU316330	-	-
anthracite	-	NU316354	-	-

- Characteristics**
- Connection: screw terminals
 - Cables: 1 to 2,5 mm² rigid/flexible
 - Lightable with NU9825A, NU9823AM and NU9825AZ LED lamps and rockers with visor

20 AX - 250 V AC switches

	2 poles
2 modules	
white	NU322518

- Characteristics**
- Connection: screw terminals
 - Cables: up to 4 mm² rigid/flexible

10 A - 250 V AC push-buttons

	NO without symbol	with bell symbol	with light symbol	NO/NC without symbol	with label holder	NO with location lamp without symbol	with bell symbol	with light symbol
2 modules								
white	NU320618 (1) NU320618F (2)	NU320618C	NU320618L	NU323618	NU324620	NU320618N (1) NU320618FN (2)	NU320618CN	NU320618LN
aluminium	NU320630	NU320630C	NU320630L	NU323630	NU324630	NU320630N	NU320630CN	NU320630LN
anthracite	NU320654	NU320654C	NU320654L	NU323654	NU324654	NU320654N	NU320654CN	NU320654LN
1 module								
white	NU310618 (1) NU310618F (2)	NU310618C	NU310618L	NU313618		NU310618N		
aluminium	NU310630	NU310630C	NU310630L	NU313630		NU310630N		
anthracite	NU310654	NU310654C	NU310654L	NU313654		NU310654N		

- Characteristics**
- Connection: screwless terminals
 - Cables: 1.5 to 2.5 mm² rigid/flexible
 - Lightable with NU9825A, NU9823AM and NU9825AZ LED lamps and rockers with visor

(1) flow
(2) pack / box

Accessories for switches and push-buttons

Rockers	without symbol	with visor	for Unica MGU●●●●●●
2 modules			
white	NU920018	NU920018N	NU920018U
aluminium	NU920030	NU920030N	NU920030U
anthracite	NU920054	NU920054N	NU920054U
1 module			
white	NU910018	NU910018N	NU910018U
aluminium	NU910030	NU910030N	NU910030U
anthracite	NU910054	NU910054N	NU910054U

LED lamps	12-24 V DC White	250 V AC Red	White
	NU9823AM	NU9825A	NU9825AZ
Characteristics			
Consumption	0,15 mA	1,5 mA	0,05 mA


Spring to transform a switch to push-button



S520299

- Characteristics**
- 10 units delivered with a positioning aid tool

Schuko sockets

90°	Child-safe Quick connectors
2 modular	
	
<input type="checkbox"/> White	NU305718
<input type="checkbox"/> Aluminium	NU305730
<input checked="" type="checkbox"/> Red	NU305703
<input checked="" type="checkbox"/> Anthracite	NU305754
Characteristics	
<ul style="list-style-type: none"> • 2P+E - 16 A - 250 V 	



Europlus sockets


Single	10 A
1 modular	
	
<input type="checkbox"/> White	NU303118
<input type="checkbox"/> Aluminium	NU303130
Characteristics	
<ul style="list-style-type: none"> • 2P - 250 V • Screw terminals 	

Accessories

Cover for Schuko socket

NU9091
Characteristics
<ul style="list-style-type: none"> • Set of 10 covers for multiple Schuko quick connector sockets

45°	Standard	
4 modules	Quick connector	Screw terminals*
		
<input type="checkbox"/> White	NU306618	NU306718A NU306718 (1)
<input type="checkbox"/> Aluminium	NU306630	NU306730A
<input checked="" type="checkbox"/> Red	NU306603	NU306703A NU306703 (1)
<input checked="" type="checkbox"/> Anthracite	NU306754A	
Characteristics		
<ul style="list-style-type: none"> • 2P+E - 16 A - 250 V • For screw terminal products - Screw terminal IPT terminals (except (1): screw terminals on one side) • Child-safe 		

45°	Standard
6 modules	Quick connector
	
<input type="checkbox"/> White	NU307618
<input type="checkbox"/> Aluminium	NU307630
<input checked="" type="checkbox"/> Red	NU307603
Characteristics	
<ul style="list-style-type: none"> • 2P+E - 16 A - 250 V • Child-safe 	

P121211



P121214



P121212



P121215



P121213



P121216



S-One C5e – Cat 5e

Description	Qty/pack	Ref. No
RJ45 Connector Cat 5e unshielded	1	VDIB17725U01

RJ45 Connector Cat 5e shielded	1	VDIB17725B01
--------------------------------	---	---------------------

S-One C6 – Cat 6

Description	Qty/pack	Ref. No
RJ45 Connector Cat 6 unshielded	1	VDIB17726U01

RJ45 Connector Cat 6 shielded	1	VDIB17726B01
-------------------------------	---	---------------------

S-One C6_A – Cat 6_A

Description	Qty/pack	Ref. No
RJ45 Connector Cat 6 _A unshielded	1	VDIB1772XU01

RJ45 Connector Cat 6 _A shielded	1	VDIB1772XB01
--	---	---------------------

Radio and television sockets

	TV		TV/FM			R-TV/SAT			FM/TV/SAT
	male, individual	female, individual	individual	intermediate	terminal	individual	intermediate	terminal	individual (1 cable)
2 modules									
white	NU346218	-	NU345118	NU345318	NU345218	NU345418	NU345618	NU345518	NU345018
aluminium	NU346230	-	NU345130	NU345330	NU345230	NU345430	NU345630	NU345530	NU345030
anthracite	NU346254	-	NU345154	NU345354	NU345254	NU345454	NU345654	NU345554	NU345054
1 module									
white	NU346118	NU346818	-	-	-	-	-	-	-
aluminium	NU346130	NU346830	-	-	-	-	-	-	-
anthracite	NU346154	NU346854	-	-	-	-	-	-	-

Multi service sockets

	M-S
2 modules	
white	NU545718
aluminium	NU545730
anthracite	NU545754

Multimedia sockets

	VGA	Mini Jack	HDMI	RCA
1 module				
white	NU343218	NU343318	NU343018	NU343118
aluminium	NU343230	NU343330	NU343030	NU343130
anthracite	NU343254	NU343354	NU343054	NU343154

Radio and television centre plates

	TV/FM	R-TV/SAT
2 modules		
white	NU944018	NU944118
aluminium	NU944030	NU944130
beige	NU944044	-
anthracite	NU944054	NU944154

USB data sockets and chargers

	Data sockets	Chargers type A	Chargers type A+C
2 modules			
white	-	NU341818	NU301818
aluminium	-	NU341830	NU301830
anthracite	-	NU341854	NU301854
1 module			
white	NU342918	NU342818	-
aluminium	NU342930	NU342830	-
anthracite	NU342954	NU342854	-
Characteristics			
	<ul style="list-style-type: none"> USB 2.0 	<ul style="list-style-type: none"> Output power: <ul style="list-style-type: none"> NU3418●●: 5 V DC - max 2.1 A NU3428●●: 5 V DC - 1 A 	<ul style="list-style-type: none"> NU3018●●, output power: 5 V DC - max 2.4 A

Loudspeakers connectors

	2 modules	1 module
white	NU348618	NU348718
aluminium	NU348630	NU348730
anthracite	NU348654	NU348754

RJ45 centre plates

	For S-One RJ45 connector		For Keystone/Systimax RJ45 connector	
	straight	inclined	straight	inclined
2 modules				
white	NU941118	NU940718	NU946118	NU946418
aluminium	NU941130	NU940730	NU946130	NU946430
beige	NU941144	-	-	-
anthracite	NU941154	NU940754	NU946154	NU946454
1 module				
white	NU942018			
aluminium	NU942030			
anthracite	NU942054			
4 modules				
white	NU941018	NU940618	NU946018	
aluminium	NU941030	NU940630	NU946030	
beige	NU941044	-	NU946054	
anthracite	NU941054	NU940654		
Characteristics				
	<ul style="list-style-type: none"> Straight : with shutter and label space Inclined : with label space 			

RJ45 centre plates for trunking

	For S-One RJ45 connector	
2 modules		
white	NU941118T	
Characteristics		
	<ul style="list-style-type: none"> With shutter and label space 	
Optical fibre centre plates		
	SC/SC APC Simplex	SC/SC APC duplex
2 modules		
white	NU943918	NU943818
aluminium	NU943930	NU943830
anthracite	NU943954	NU943854

- Characteristics**
- Support to receive any SC simplex and duplex adapters
 - Support to receive Actassy optical fibre adapters:
 - SC Duplex multi mode adapters: ref. n° VDB6031001 and VDB6031002
 - SC Duplex single mode adapters: ref. n° VDB6032001 and VDB6032002
 - SC APC Duplex single mode adapter: ref. n° VDB6082001
 - SC APC Simplex single mode adapter: ref. n° VDB6072001.

Telephone sockets

	RJ12 connector
2 modules	
white	NU349718
aluminium	NU349730
anthracite	NU349754
1 module	
white	NU349118
aluminium	NU349130
anthracite	NU349154

Life Is On | **Schneider**
Electric

www.se.com

Schneider Electric. All Rights Reserved.
All trademarks are owned by Schneider Electric Industries SAS or its affiliated companies.
Document reference: LSB03605EN

This document has been
printed on recycled paper

