




Pendant luminaires  
4068754003773  
L 1407, B 57, H 75

pendant  
silver, matt (approx. RAL 9006)

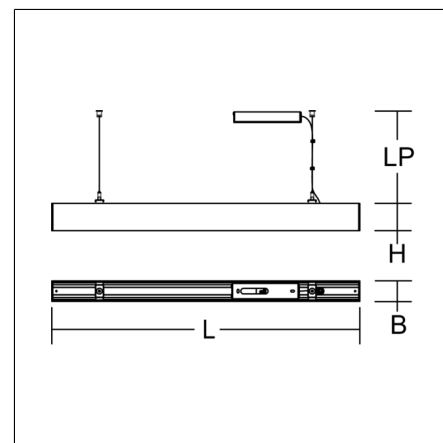

Linear pendant luminaire for aesthetically sophisticated lighting. Housing: extruded aluminium profile, powder-coated. End cap aluminium powder-coated. Canopy made of aluminium, powder-coated. Diffuser made of non-yellowing plastic (PMMA), opal. Suitable for pendant. 2-point steel cable suspension freely positionable and infinitely height-adjustable. Special lengths available on request. LED unit with integrated converter interchangeable and removable. Suitable for through-wiring. With sensors or as a safety luminaire on request.

## Product specifications

Length L	1407 mm
Width B	57 mm
Height H	75 mm
Suspension length LP	2000 mm
Weight	3.95 kg
Light source	LED
Colour temperature	#4000 K   #4000 K
Rated luminous flux	6450 lm
System power	52 W
System efficiency	124 lm/W
Glare evaluation UGR (4H 8H)	23,7
Beam angle	down 104°/107° up 105°/107°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	DALI
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	15
Luminaires on B16A fuse	24
Luminaires on C10A fuse	24
Luminaires on C16A fuse	40
Inrush current / Inrush current duration	26 A / 215 µs
CIE Flux Code / CEN Flux Code	49 80 96 63 100
Type of protection	IP 20
Protection class	I
Filament test	650 °C
Impact resistance	IK03
Ambient temperature	5 °C ... + 30 °C
Conformity mark	CE, EAC