


VARIOPLAST I

672176.003.1.04 | Stand-by luminaires for escape route illumination



Ceiling and wall luminaires
4051859946731
L 320, B 186, H 80

Ceiling mounting, Wall (surface)
black

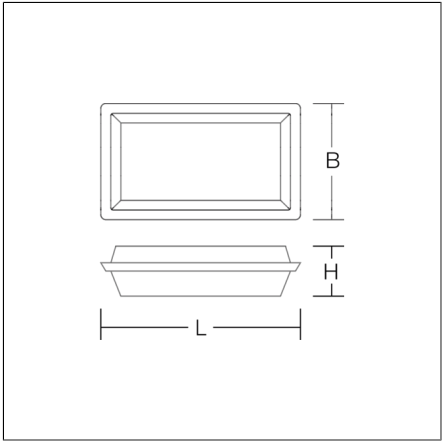

Luminaire for escape route illumination. Base: plastic (polycarbonate). Housing and diffuser: opal, made of shockproof plastic (polycarbonate). Self-contained system with automatic self-test and feedback to the RZB monitoring system MULTIDIGIT.

Product specifications

Typ of emergency lighting	Self-contained system
Monitoring	MultiDigit
Battery	NiMh
Duration	8 h
Operating mode	maintained power mode
Length L	320 mm
Width B	186 mm
Height H	80 mm
Weight	1.27 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux, mains operation	880 lm
System power, mains operation	7,7 W
Rated luminous flux, emergency operation	230 lm
System efficiency	114 lm/W
Glare evaluation UGR (4H 8H)	21,7
Beam angle	down 121°/109° up 180°/180°
Colour rendering index (CRI)	80
Photobiological safety according to EN 62471	Risk group 0
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
CIE Flux Code / CEN Flux Code	43 73 92 94 100
Type of protection	IP 65
Protection class	I
Filament test	960 °C
Impact resistance	IK08
Ambient temperature for maintained power	0 °C ... + 30 °C
Ambient temperature for non-maintained power mode	5 °C ... + 40 °C
Safety marks	D-mark
Conformity mark	CE, EAC

VARIOPLAST I

672176.003.1.04 | Stand-by luminaires for escape route illumination



Accessories



982195.002
Display cover



982354.002
Suspension system



982477.014